



3D图示 (参考)

■ Specifications :


1. Voltage rating: 250V AC / DC
2. Current rating: 5A AC / DC
3. Withstanding voltage: 1500V AC/minute
4. Temperature range: -25°C~+85°C
5. Insulation resistance: 1000MΩ
6. Contact resistance: 0.02Ω Max
7. Material: Nylon 66  
Contact Pin: Brass

X5080 W V -XX- N0 SN  
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : V-Stright 180°
- ④ Row No.Pin No.XX-02-12
- ⑤ Material:N0-Nylon66 94V-0
- ⑥ Planting Category:SN-Bright tin plating

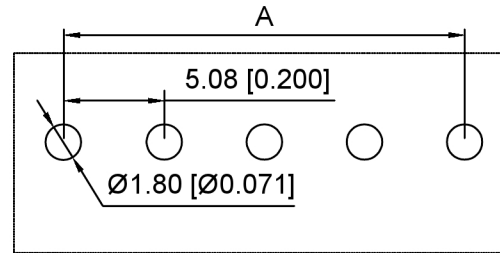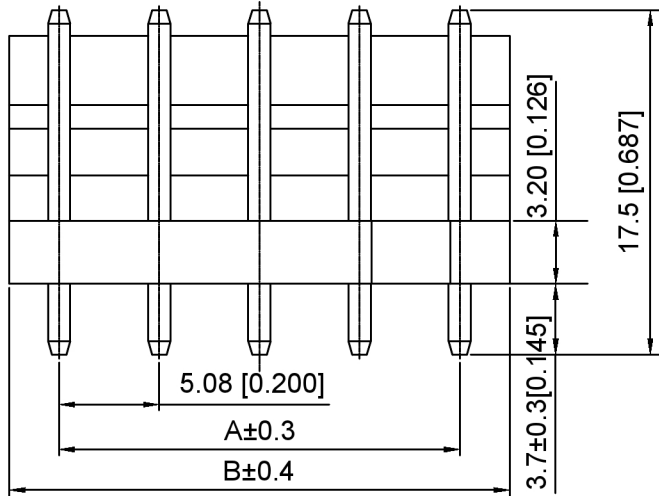

PCB安装尺寸图

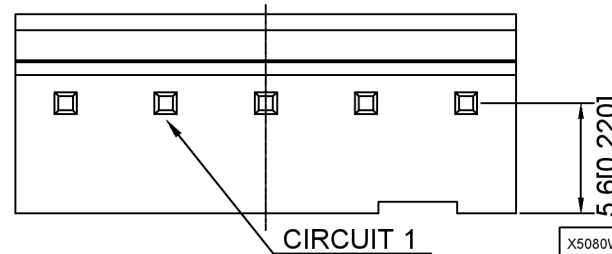

| PIN | A     | B     |
|-----|-------|-------|
| 2   | 5.08  | 10.16 |
| 3   | 10.16 | 15.24 |
| 4   | 15.24 | 20.32 |
| 5   | 20.32 | 25.40 |
| 6   | 25.40 | 30.48 |
| 7   | 30.48 | 35.56 |
| 8   | 35.56 | 40.64 |
| 9   | 40.64 | 45.72 |
| 10  | 45.72 | 50.80 |
| 11  | 50.80 | 55.88 |
| 12  | 55.88 | 60.96 |

|                 |                  |               |            |                      |
|-----------------|------------------|---------------|------------|----------------------|
| X5080WV-XX-N0SN | Nylon66 UL 94V-0 | Brass         | Tin-Plated | X5080H               |
| PART NO         | Material         | Material(Pin) | Finsh(Pin) | Suitable XKB Housing |

广东星坤科技股份有限公司

生效 日期

文件工程章

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|------|-------------|------|---------|----------|------------------------|
| ΔX   |             |      |         |          | ANGLAR ±5°             |
| ΔX   |             |      |         |          | L ≤ 4 ±0.2             |
| ΔX   |             |      |         |          | 4 < L ≤ 16 ±0.3        |
| ΔX   |             |      |         |          | 16 < L ≤ 63 ±0.4       |
| MARK |             |      |         |          | L > 63 ±0.5            |



|      |             |                                              |
|------|-------------|----------------------------------------------|
| DSND | SCALE: N/A  | MODEL TYPE:<br>5.08mm Crimp Style Connectors |
| DWN  | VIEW:       | PART NO.:<br>X5080WV-XX-N0SN                 |
| CHKD | UNIT: mm/in | DWG NO.:<br>X-X5080WV-XX-N0SN                |
| APPD | SIZE: A4    | WEIGHT                                       |

XKB INDUSTRIAL PRECISION CO.,LIMITED

|       |          |
|-------|----------|
| SHEET | REVISION |
| 1/1   | A0       |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#)  
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#)  
[FCN-367T-T012/H](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[803-41-018-10-001000](#)