



**Specifications:**

规格:  
**Voltage rating:**250V AC/DC  
 额定电压: 250V AC/DC  
**Current rating:**3A AC/DC  
 额定电流: 3A AC/DC  
**Withstanding voltage:**1500V AC/minute  
 耐受电压: 1500V AC/分钟  
**Temperature range:**-25°C~+85°C  
 温度范围: -25°C~+85°C  
**Insulation resistance:**≥1000MΩ  
 绝缘电阻: ≥1000MΩ  
**Contact resistance:**≤20mΩ  
 接触电阻: ≤20mΩ  
**After environmental testing:**≤30mΩ  
 环境测试后: ≤30兆欧

X9555 W V XX-2xXX EX- PT V01 XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- 1.Series No
- 2.Category:W-WAFER
- 3.Welding Board Angle:V-180°
- 4.Welding Way:S-SMT
- 5.Row No-Pin No:2xXX-Double Row
- 6.Special NO:  
E-Matching 9555H-2xXXE HSG,DIP-2.90mm  
E1-DIP-2.50mm
- 7.Material:PT-PBT 94V-0
- 8.Plating Category:V01-Gold Flash  
SN-Bright Tin Plating(70u")
- 9.Color:Blank-Natural Color

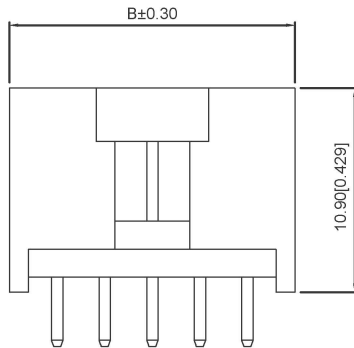

Dim(L)	E1=2.50
	E=2.90

poles	Dimensions(mm)			poles	Dimensions(mm)		
	A	B	C		A	B	C
2x03	5.08	10.12	8.12	2x12	27.94	32.98	30.98
2x04	7.62	12.66	10.66	2x13	30.48	35.52	33.52
2x05	10.16	15.20	13.20	2x14	33.02	38.06	36.06
2x06	12.70	17.74	15.74	2x15	35.56	40.60	38.60
2x07	15.24	14.00	18.28	2x16	38.10	43.14	41.15
2x08	17.78	20.28	20.82	2x17	40.64	45.68	43.68
2x09	20.32	25.36	23.36	2x18	43.18	48.22	46.22
2x10	22.86	27.90	25.90	2x19	45.72	50.76	48.76
2x11	25.40	30.44	28.44	2x20	48.26	53.30	51.30

X9555WV-2xXXE1-P TV01	PBT UL 94V-0	Brass	Gold-Flash	X9555H-E
X9555WVS-2xXXE-P TV01	PBT UL 94V-0		Gold-Flash	
PART NO	Material	Material(pin)	Finish(Pin)	Suitable XKB Terminal



广东星坤科技股份有限公司

生 日期

ΔX 日期

ΔX 日期

MARK 文件工程章

REVISIONS

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm
	UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.: 2.54mm Crimp Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.: X9555WVS-2xXXEX-PTV01
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Connectors](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[571763P](#) [61-168618-12P](#) [D20419-211](#) [72.250.1628.2](#) [72.250.2428.2](#) [76.350.0729.0](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [9776-18-6](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [91-644626-35P](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDRA-E68W1LFDTC-SL+](#) [54182-0605](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [10-565995-597N](#) [10-584459-12P](#) [5554841-1](#) [SM3106F14S-7S-LC](#) [SM3106R18-18S](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [PCS-96LFD+](#) [60-042222-02S](#) [10099439-003C-TRLF](#)