



REVISIONS		APPROVED		DATE	REVISOR	DATE	DESCRIPTION	MARK
△ X								
△ X								
△ X								

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
 香港星洲工業精密有限公司





UNSPECIFIED TOLERANCES	±0.5	DATE		APPD		SIZE: A4	WEIGHT	REVISION
16 > L ≤ 63	±0.4	DATE		CHKD		UNIT: mm	1.0g	A0
4 < L ≤ 16	±0.3	DATE		DWN		VIEW:	1/1	
L ≤ 4	±0.2	DATE		DSND		SCALE: N/A		
ANGULAR	±5°	DATE				MODEL TYPE: X9827H-XX-N0XX		

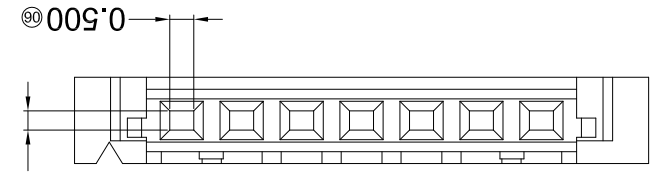

04P~30P Double Salient
Scale 1:1

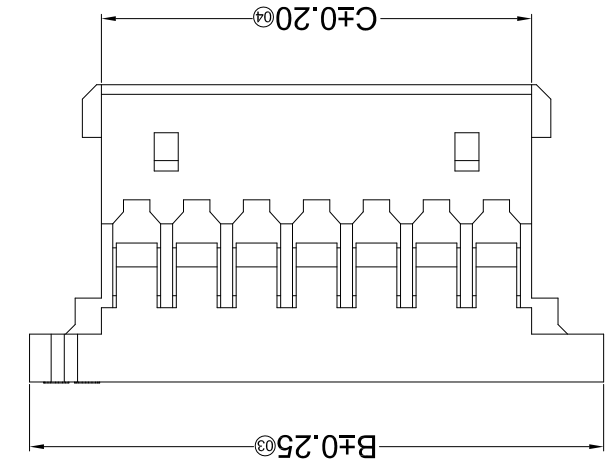

02P~03P Single Salient
Scale 1:2

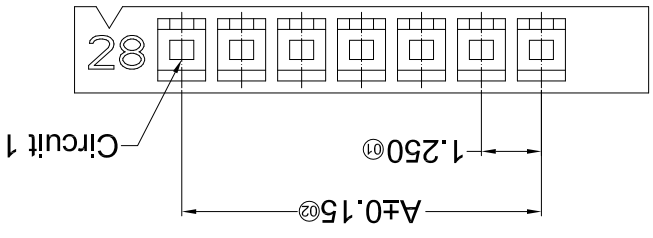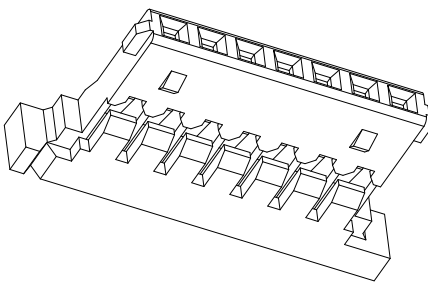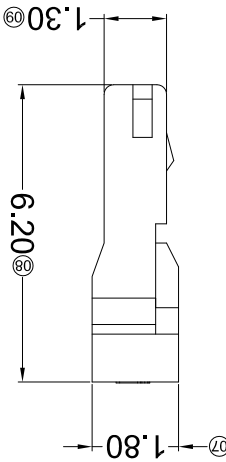

PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal
X9827H-XX-N0	Nylon 66 UL 94V-0	X9827H-XX-N0HF	X9827W
X9827H-XX-N0HF	Halogen-free	Nylon 66 UL 94V-0	
X9827H-XX-N0HFBK	Black (Halogen-free)	Nylon 66 UL 94V-0	

Poles	Dimensions(mm)		
	A	B	C
02	1.25	5.72	2.72
03	2.50	6.97	3.97
04	3.75	8.22	5.22
05	5.00	9.47	6.47
06	6.25	10.72	7.72
07	7.50	11.97	8.97
08	8.75	13.22	10.22
09	10.00	14.47	11.47
10	11.25	15.72	12.72
Poles			
A			
B			
C			
Dimensions(mm)			
30	36.25	40.72	37.72
20	23.75	28.22	25.22
15	17.50	21.97	18.97
14	16.25	20.72	17.72
13	15.00	19.47	16.47
12	13.75	18.22	15.22
11	12.50	16.97	13.97
A			
B			
C			
Dimensions(mm)			

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: Blank-ordinary
- ④ Row No.-Pin No.: XX-02P~30P
- ⑤ Plug the Pin & special No.:
- ⑥ Material: N0-PA66 94V-0
- ⑦ HF-Halogen free
- ⑧ Color: Blank-natural color; BK-Black

X9827 H X-XX X-N0 HF XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- Specifications :
- Voltage rating: 125V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)