


## ACS Series

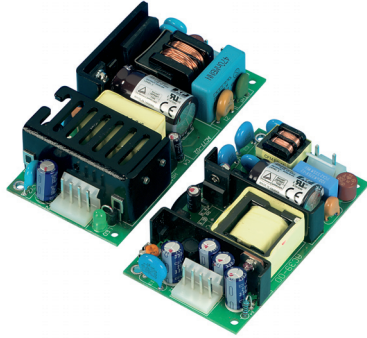

- Low Cost
- Small Size
- Universal Input
- Rugged Design
- High MTBF
- International Safety Approvals
- Covered Versions Available

## Specification

---

### Input

---

Input Voltage	• 90-264 VAC (110-370 VDC)
Input Frequency	• 47-63 Hz
Input Current	• ACS40: 0.45 A rms at 230 VAC ACS60: 0.60 A rms at 230 VAC
Inrush Current	• Cold start at 25 °C: 25 A at 115 VAC, 50 A at 230 VAC
Earthing	• Class I

### Output

---

Output Voltage	• See table
Hold Up Time	• 8 ms typical at full load
Line Regulation	• 0.5% max at full load
Load Regulation	• 1.0% max at 10% load to full load
Ripple & Noise	• 1% max pk-pk, 20MHz BW
Overvoltage Protection	• Typically 130% of max output
Overcurrent Protection	• 120% typical

### General

---

Efficiency	• See tables
Isolation	• 3000 VAC Input to Output 1500 VAC Input to Ground 500 VAC Output to Ground
Switching Frequency	• 50-70 kHz
MTBF	• 230 kHrs per MIL-HDBK-217F

### Environmental

---

Operating Temperature	• 0 °C to +70 °C, derate from full load at +50 °C to half load at +60 °C. Reduce both temperatures by 10 °C when cover is fitted
Storage Temperature	• -40 °C to +85 °C

### EMC & Safety

---

Emissions	• FCC20780 Level B, CISPR22 (EN55022), level B conducted
ESD Immunity	• EN61000-4-2, level 3 Perf Criteria A
Radiated Immunity	• EN61000-4-3, 10 V/m Perf Criteria A
EFT/Burst	• EN61000-4-4, level 2 Perf Criteria A
Surge	• EN61000-4-5, level 3 Perf Criteria A
Conducted Immunity	• EN61000-4-6, 10 V Perf Criteria y
Safety Approvals	• EN62368-1, UL62368-1, CE & UKCA meets all applicable directives & legislation.


## Models and Ratings

Output Power	Output Voltage	Output Current		Efficiency	Model Number
		Nominal	Peak <sup>(1)</sup>		
40 W	3.3 V	6.000 A	7.200 A	74%	ACS40US03
	5.0 V	6.000 A	7.200 A	78%	ACS40US05
	9.0 V	4.450 A	5.340 A	82%	ACS40US09
	12.0 V	3.340 A	4.000 A	84%	ACS40US12
	15.0 V	2.670 A	3.200 A	85%	ACS40US15
	24.0 V	1.670 A	2.000 A	86%	ACS40US24
	36.0 V	1.110 A	1.330 A	87%	ACS40US36
	48.0 V	0.834 A	1.000 A	88%	ACS40US48
60 W	3.3 V	8.000 A	8.500 A	74%	ACS60US03
	5.0 V	8.000 A	9.000 A	78%	ACS60US05
	9.0 V	6.670 A	8.000 A	82%	ACS60US09
	12.0 V	5.000 A	6.000 A	84%	ACS60US12
	15.0 V	4.000 A	4.800 A	85%	ACS60US15
	24.0 V	2.500 A	3.000 A	86%	ACS60US24
	36.0 V	1.670 A	2.000 A	87%	ACS60US36
	48.0 V	1.250 A	1.500 A	88%	ACS60US48

### Notes

1. Peak load lasting <30 s with a maximum duty cycle of 10%.

## Mechanical Details

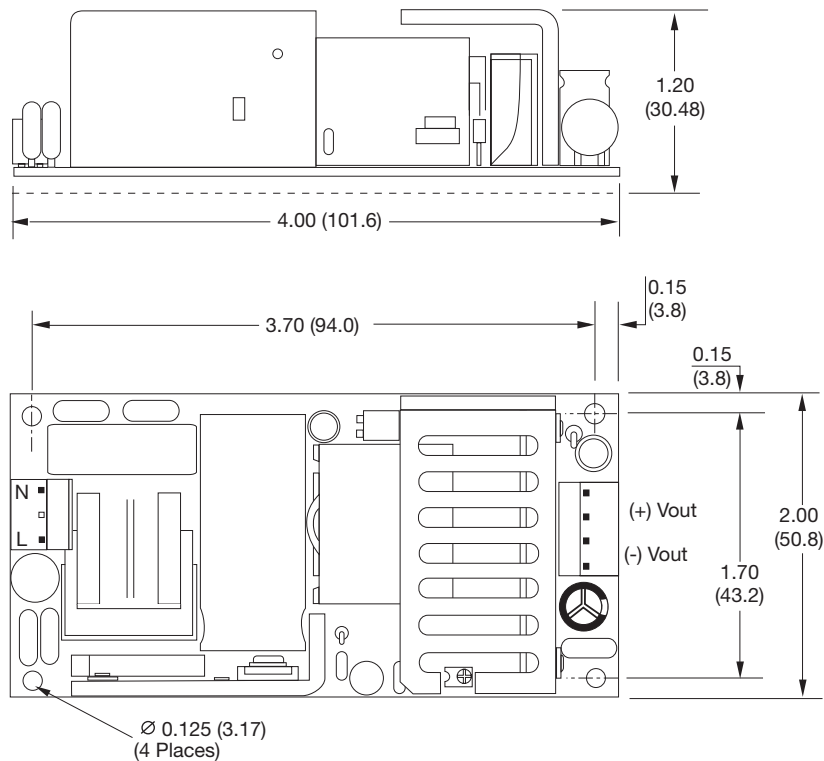

### Notes

1. All dimensions shown in inches (mm).
2. Input connector mates with Molex housing 09-50-3031 and Molex 2878 series crimp terminal.  
Output connector mates with Molex housing 90-50-3041 and Molex 2878 series crimp terminal.
3. Loom kits with 300 mm wire available. Order part number ACS40/60 LOOM KIT.
4. For mating connectors only, order part number ACS20-60 CONKIT.
5. Covers available. Order part number ACS40/60 COVER (114 x 64 x 38.5mm). To receive unit with cover fitted, add suffix '-C' to model number.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [XP Power](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)  
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)  
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)  
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)  
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)  
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)