


2 Watt

- Regulated Single & Dual Output
- 2:1 Input Range
- Compact DIP8 Package
- 1500 VDC Isolation
- Operating Temperature -40 °C to +95 °C
- ITE Safety Approvals
- Full Load at 70 °C
- Class A Conducted & Radiated Emissions
- 3 Year Warranty

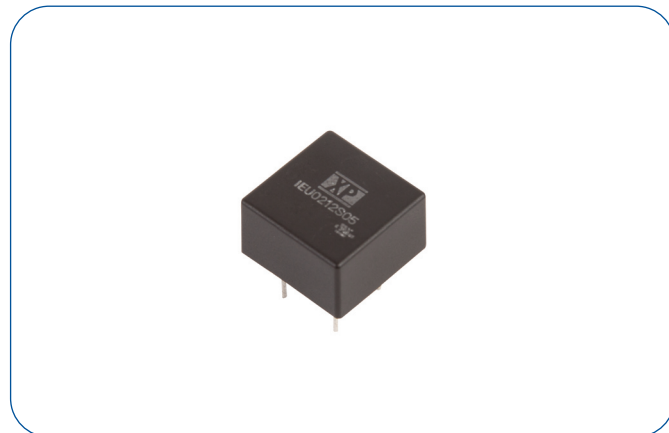

Dimensions:

IEU02:
0.55 x 0.55 x 0.31" (14.0 x 14.0 x 8.0 mm)

Models & Ratings

Input voltage	Output voltage	Output current	Input current ⁽¹⁾		Maximum capacitive load ⁽²⁾	Efficiency	Model number
			No load	Full load			
4.5-10V	3V3	400 mA	40 mA	335 mA	100 µF	79%	IEU0205S3V3
	5 V	400 mA		495 mA	100 µF	81%	IEU0205S05
	12V	167 mA		470 mA	100 µF	85%	IEU0205S12
	15V	134 mA		460 mA	100 µF	87%	IEU0205S15
	±5V	±200 mA		480 mA	±100 µF	83%	IEU0205D05
	±12V	±83 mA		470 mA	±100 µF	85%	IEU0205D12
	±15V	±67 mA		475 mA	±100 µF	85%	IEU0205D15
9-18V	3V3	400 mA	27 mA	140 mA	100 µF	80%	IEU0212S3V3
	5 V	400 mA		200 mA	100 µF	83%	IEU0212S05
	12V	167 mA		190 mA	100 µF	87%	IEU0212S12
	15V	134 mA		195 mA	100 µF	87%	IEU0212S15
	±5V	±200 mA		200 mA	±100 µF	84%	IEU0212D05
	±12V	±83 mA		195 mA	±100 µF	86%	IEU0212D12
	±15V	±67 mA		195 mA	±100 µF	86%	IEU0212D15
18-36V	3V3	400 mA	15 mA	70 mA	100 µF	79%	IEU0224S3V3
	5 V	400 mA		100 mA	100 µF	84%	IEU0224S05
	12V	167 mA		95 mA	100 µF	86%	IEU0224S12
	15V	134 mA		95 mA	100 µF	87%	IEU0224S15
	±5V	±200 mA		100 mA	±100 µF	84%	IEU0224D05
	±12V	±83 mA		95 mA	±100 µF	86%	IEU0224D12
	±15V	±67 mA		95 mA	±100 µF	86%	IEU0224D15
36-75V	3V3	400 mA	8 mA	35 mA	100 µF	79%	IEU0248S3V3
	5 V	400 mA		50 mA	100 µF	83%	IEU0248S05
	12V	167 mA		50 mA	100 µF	85%	IEU0248S12
	15V	134 mA		50 mA	100 µF	86%	IEU0248S15
	±5V	±200 mA		50 mA	±100 µF	82%	IEU0248D05
	±12V	±83 mA		50 mA	±100 µF	84%	IEU0248D12
	±15V	±67 mA		50 mA	±100 µF	84%	IEU0248D15

Notes

1. Input currents measured at nominal input voltage.
2. Maximum capacitive load is per output.

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage Range	4.5		10	VDC	5 V nominal
	9.0		18		12 V nominal
	18.0		36		24 V nominal
	36.0		75		48 V nominal
Input Filter	Internal Capacitor				
Input Surge			12	VDC for 1 s	5 V nominal
			25		12 V nominal
			50		24 V models
			100		48 V models

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage	3.3		30	VDC	See Models and Ratings table
Initial Set Accuracy			±1.5	%	At full load
Output Voltage Balance			±2.0	%	For dual output with balanced loads
Minimum Load				A	No minimum load required
Line Regulation			±0.2	%	From minimum to maximum input at full load
Load Regulation			±1.0	%	From 0 to full load
Cross Regulation			±5.0	%	On dual output models when one load is varied between 25% and 100% and other is fixed at 100%
Transient Response			5	% deviation	Recovery within 1% in less than 500 µs for a 25% load change.
Ripple & Noise		70		mV pk-pk	20 MHz bandwidth. Measured using 0.47 µF ceramic capacitor.
Overload Protection		180		%	
Short Circuit Protection					Continuous, with auto recovery
Maximum Capacitive Load					See Models and Ratings table
Temperature Coefficient			0.02	%/°C	

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		84		%	See Models and Ratings table
Isolation: Input to Output	1500/1800			VDC	60 s/1 s
Isolation Resistance	10 ⁹			Ω	At 500 VDC
Isolation Capacitance		100		pF	
Switching Frequency		100		kHz	
Power Density			21.3	W/in ³	
Mean Time Between Failure		4.2		MHrs	MIL-HDBK-217F, +25 °C GB
Weight		0.008 (3.9)		lb (g)	

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-40		+95	°C	See Derating Curve.
Storage Temperature	-50		+125	°C	
Case Temperature			+95	°C	
Humidity			95	%RH	Non-condensing
Cooling					Natural convection
Case Flammability	UL 94V-0 Rated				Non conductive black plastic
Lead-Free Reflow Solder Process					IPC/JEDEC J-STD-020D.1

EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	EN55022	Class A	See application note
Radiated	EN55022	Class A	See application note


EMC: Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
ESD	EN61000-4-2	±8 kV air discharge, ±6 kV contact	A	
Radiated	EN61000-4-3	10 V/m	A	
EFT/Burst	EN61000-4-4	±2 kV	A	With external input capacitor, suggested part is CHEMI-CON KY 220µF/100V
Surge	EN61000-4-5	±1 kV	A	With external input capacitor, suggested part is CHEMI-CON KY 220µF/100V
Conducted	EN61000-4-6	10 V rms	A	
Magnetic Fields	EN61000-4-8	3 A/m	A	

Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
CB Report	IEC60950-1	Information Technology
UL	UL/cUL60950-1, UL/cUL62368-1	Information Technology

Mechanical Details

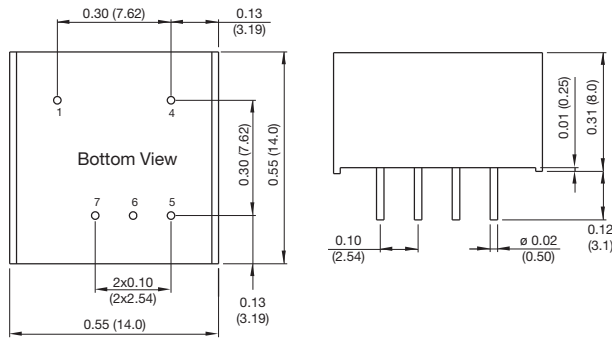


Pin Connections		
Pin	Single	Dual
1	-Vin	-Vin
4	+Vin	+Vin
5	+Vout	+Vout
6	No Pin	Common
7	-Vout	-Vout

Notes


- All dimensions are in inches (mm)
- Weight: 0.008 lbs (3.9g) approx.
- Tolerance: X.XX±0.01 (X.X±0.25)
X.XXX±0.005 (X.XX±0.13)
- Pin Tolerance: ±0.002 (±0.05)

Application Notes

Derating Curve

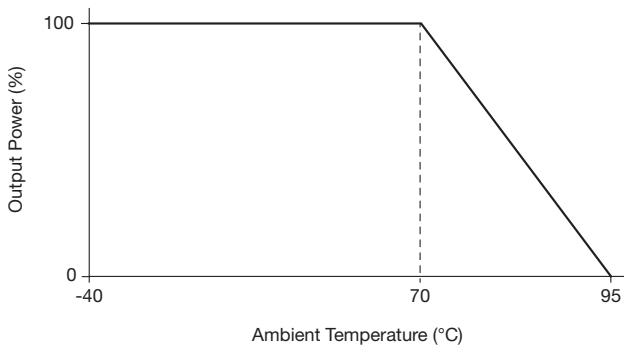

EMI Filter

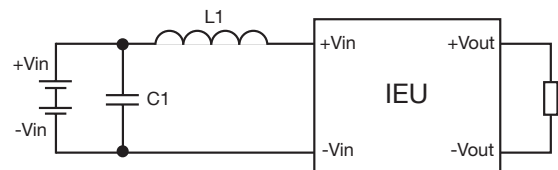

Model	C1	L1
IEU0205	4.7 µF/16 V	3.3 µH
IEU0212	4.7 µF/25 V	18.0 µH
IEU0224	4.7 µF/50 V	39.0 µH
IEU0248	2.2 µF/100 V	68.0 µH

C1 = 1206 X7R MLCC, L1 = SCD0504T series

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [XP Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)