


# 1 Watt 1W Series

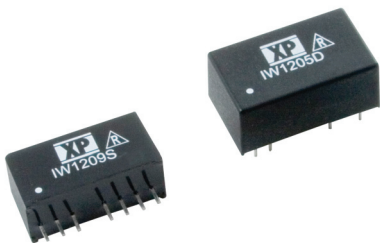

- Regulated Single & Dual Output
- Wide 2:1 Input Range
- SIP or DIP Package
- 1000 VDC Isolation (Optional 3000 VDC)
- Continuous Short Circuit Protection
- 3 Year Warranty

## Specification

### Input

- Input Voltage Range • See table
- Input Reflected Ripple Current • 35 mA pk-pk through 12  $\mu$ H inductor, 5 Hz to 20 MHz
- Input Reverse Voltage Protection • None
- Input Filter • Capacitor
- Input Surge • 5 V models: 12 VDC for 100 ms  
12 V models: 24 VDC for 100 ms  
24 V models: 40 VDC for 100 ms  
48 V models: 80 VDC for 100 ms

### Output

- Output Voltage • See table
- Minimum Load • None<sup>(8)</sup>
- Line Regulation •  $\pm 0.5\%$  max
- Load Regulation •  $\pm 1.0\%$  max from 25-100% load<sup>(7)</sup>
- Setpoint Accuracy •  $\pm 2\%$  max
- Ripple & Noise • 80 mV pk-pk max, 20 MHz bandwidth<sup>(6)</sup>
- Short Circuit Protection • Continuous with auto recovery (foldback)
- Cross Regulation •  $\pm 5\%$  on dual output models
- Remote On/Off • Optional on SIP package model<sup>(4)</sup>
- Temperature Coefficient •  $0.02\%/^{\circ}\text{C}$

### General

- Efficiency • See table
- Isolation Voltage • 1000 VDC (optional 3000 VDC)
- Isolation Resistance •  $10^9\Omega$
- Isolation Capacitance • 60 pF
- Switching Frequency • 100-650 kHz
- MTBF •  $>1.66$  Mhrs to MIL-HDBK-217F at 25  $^{\circ}\text{C}$ , GB

### Environmental

- Operating Temperature •  $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$ , derate from 100% load at  $85^{\circ}\text{C}$  to 0% load at  $100^{\circ}\text{C}$
- Storage Temperature •  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Case Temperature •  $100^{\circ}\text{C}$  max
- Cooling • Convection cooled

### Safety


- Safety Approvals • UL62368-1, CE & UKCA meets all applicable directives & legislation.

### Notes

- For dual inline package replace 'S' in model number with 'D'.
- For optional 3 kV isolation add suffix '-H' to the model number.
- For dual output delete suffix 'A' & split output current equally between rails.
- For optional Remote On/Off on SIP models, add suffix '-R' to model number. Applying 5V via 1 k  $\Omega$  current limiting resistor and diode turns output off.
- Output capacitor of 100  $\mu\text{F}$  required to meet quoted ripple & noise.
- Minimum load of 25% required to meet quoted specifications.
- Operation at no load will not damage the converter but it may not meet all specifications.
- Pin pitch tolerance:  $\pm 0.014$  ( $\pm 0.35$ ), Case tolerance:  $\pm 0.02$  ( $\pm 0.5$ )
- Weight: SIP 0.009 lbs (4.0 g), DIP 0.013 lbs (6.0 g)

Input Voltage	No Load Input Current	Output Voltage <sup>(9)</sup>	Output Current	Max. Capacitive Load	Efficiency	Model Number <sup>(1-5)</sup>
4.5-9.0 V	15 mA	3.3 V	303 mA	3300 $\mu\text{F}$	67%	IW0503SA
	15 mA	5.0 V	200 mA	3300 $\mu\text{F}$	67%	IW0505SA
	40 mA	9.0 V	111 mA	470 $\mu\text{F}$	70%	IW0509SA
	55 mA	12.0 V	83 mA	470 $\mu\text{F}$	70%	IW0512SA
	55 mA	15.0 V	67 mA	470 $\mu\text{F}$	70%	IW0515SA
9.0-18.0 V	70 mA	24.0 V	42 mA	220 $\mu\text{F}$	68%	IW0524SA
	15 mA	3.3 V	303 mA	3300 $\mu\text{F}$	70%	IW1203SA
	15 mA	5.0 V	200 mA	3300 $\mu\text{F}$	72%	IW1205SA
	15 mA	9.0 V	111 mA	470 $\mu\text{F}$	77%	IW1209SA
	15 mA	12.0 V	83 mA	470 $\mu\text{F}$	77%	IW1212SA
18.0-36.0 V	15 mA	15.0 V	67 mA	470 $\mu\text{F}$	77%	IW1215SA
	15 mA	24.0 V	42 mA	220 $\mu\text{F}$	73%	IW1224SA
	8 mA	3.3 V	303 mA	3300 $\mu\text{F}$	70%	IW2403SA
	8 mA	5.0 V	200 mA	3300 $\mu\text{F}$	72%	IW2405SA
	8 mA	9.0 V	111 mA	470 $\mu\text{F}$	75%	IW2409SA
36.0-72.0 V	8 mA	12.0 V	83 mA	470 $\mu\text{F}$	75%	IW2412SA
	8 mA	15.0 V	67 mA	470 $\mu\text{F}$	75%	IW2415SA
	8 mA	24.0 V	42 mA	220 $\mu\text{F}$	75%	IW2424SA
	6 mA	3.3 V	303 mA	3300 $\mu\text{F}$	66%	IW4803SA
	6 mA	5.0 V	200 mA	3300 $\mu\text{F}$	68%	IW4805SA
36.0-72.0 V	6 mA	9.0 V	111 mA	470 $\mu\text{F}$	70%	IW4809SA
	6 mA	12.0 V	83 mA	470 $\mu\text{F}$	70%	IW4812SA
	6 mA	15.0 V	67 mA	470 $\mu\text{F}$	70%	IW4815SA
	6 mA	24.0 V	42 mA	220 $\mu\text{F}$	68%	IW4824SA

## Mechanical Details

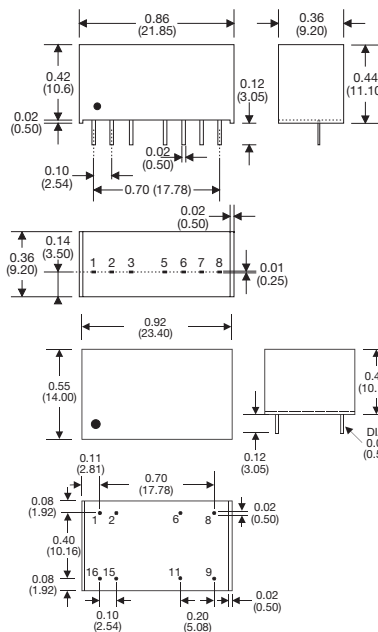

PIN CONNECTIONS		
Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
3	Opt. ROF*	Opt. ROF**
5	N.P. / N.C.	N.C.
6	+V Output	+V Output
7	-V Output	-V Output
8	NC	Common

\*When optional ROF is present pin 5 is No Connection. When not present pin 3 & 5 are No Pin.

\*\*When optional ROF is present pin 5 is No Connection. When not present pin 3 & 5 are No Connection.

PIN CONNECTIONS		
Pin	Single	Dual
1	-V Input	-V Input
2	-V Input	-V Input
6	NC	Common
8	NC	-V Output
9	+V Output	+V Output
11	-V Output	Common
15	+V Input	+V Input
16	+V Input	+V Input

All dimensions in inches (mm).

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [XP Power](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)  
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)