

## JCP Series



- 2:1 Input Range
- Single, Dual & Triple Outputs
- -40 °C to +100 °C Operating Temperature
- High Efficiency up to 92%
- Six-sided Metal Case
- Fixed 350 kHz Switching Frequency
- 3 Year Warranty

### Input

---

Input Voltage Range	<ul style="list-style-type: none"> <li>• 12 VDC (9-18 VDC)</li> <li>• 24 VDC (18-36 VDC)</li> <li>• 48 VDC (36-75 VDC)</li> </ul>
Input Current	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Input Filter	<ul style="list-style-type: none"> <li>• Pi network</li> </ul>
Undervoltage Lockout	<ul style="list-style-type: none"> <li>• Turn on &gt;71% nominal input</li> <li>• Turn off &lt;67% nominal input</li> </ul>

### Output

---

Output Voltage	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Output Voltage Trim	<ul style="list-style-type: none"> <li>• ±10%</li> </ul>
Minimum Load	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Line Regulation	<ul style="list-style-type: none"> <li>• ±0.5% max for single &amp; dual output,</li> <li>• ±1.0% max for V1 of triple output,</li> <li>• ±3.0% for aux of triple output</li> </ul>
Load Regulation	<ul style="list-style-type: none"> <li>• ±0.5% max single ±1.0% dual output,</li> <li>• ±1.0% max for V1 of triple output,</li> <li>• ±4.0% for aux of triple output</li> </ul>
Setpoint Accuracy	<ul style="list-style-type: none"> <li>• ±1.5% max single and dual</li> <li>• ±1.5% max for V1, ±3.0% of triple output</li> </ul>
Voltage Balance	<ul style="list-style-type: none"> <li>• ±2.0% max</li> </ul>
Ripple & Noise	<ul style="list-style-type: none"> <li>• 2.5, 3.3 &amp; 5.0 V models 50 mV pk-pk max</li> <li>• 12.0 &amp; 15.0 V models 75 mV pk-pk max (20 MHz bandwidth)</li> </ul>
Transient Response	<ul style="list-style-type: none"> <li>• 5% max deviation, recovery to within 1% in 300 µs for a 25% load change</li> </ul>
Temperature Coefficient	<ul style="list-style-type: none"> <li>• ±0.02%/°C</li> </ul>
Overvoltage Protection	<ul style="list-style-type: none"> <li>• 2.5 V models 3.6 V typical,</li> <li>• 3.3 V models 3.9 V typical,</li> <li>• 5.0 V models 6.2 V typical,</li> <li>• 12.0 V models 15.0 V typical,</li> <li>• 15.0 V models 18.0 V typical</li> </ul>
Overcurrent Protection	<ul style="list-style-type: none"> <li>• 110-140%</li> </ul>
Short Circuit Protection	<ul style="list-style-type: none"> <li>• Continuous, trip &amp; restart (Hiccup mode)</li> </ul>
Remote On/Off	<ul style="list-style-type: none"> <li>• ON &gt;3.5 to 75 VDC or open circuit</li> <li>• OFF &lt;1.8 VDC</li> </ul>
Thermal Protection	<ul style="list-style-type: none"> <li>• Shuts down when case temperature measures +110 °C typical</li> </ul>
Remote Sense	<ul style="list-style-type: none"> <li>• Compensates for up to 10% voltage drop single output models only</li> </ul>

### General

---

Efficiency	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Isolation Voltage	<ul style="list-style-type: none"> <li>• 1500 VDC Input to Output</li> <li>• 1500 VDC Input to Case</li> <li>• Output return connected to case</li> </ul>
Switching Frequency	<ul style="list-style-type: none"> <li>• 350 kHz typical</li> </ul>
MTBF	<ul style="list-style-type: none"> <li>• &gt;600 kHrs to MIL-HDBK-217F, GB at 25 °C</li> </ul>
Isolation Resistance	<ul style="list-style-type: none"> <li>• 10<sup>9</sup> Ω min</li> </ul>

### Environmental

---

Operating Temperature	<ul style="list-style-type: none"> <li>• -40 °C to +100 °C, derate from 100% load at +60 °C to 0% load at +100 °C</li> </ul>
Case Temperature	<ul style="list-style-type: none"> <li>• +100 °C max</li> </ul>
Storage Temperature	<ul style="list-style-type: none"> <li>• -55 °C to +125 °C</li> </ul>
Cooling	<ul style="list-style-type: none"> <li>• Convection-cooled</li> </ul>
Operating Humidity	<ul style="list-style-type: none"> <li>• Up to 90%, non-condensing</li> </ul>
Shock	<ul style="list-style-type: none"> <li>• 30 g, half sine wave 18 ms pulse applied 3 times on each of 6 axes</li> </ul>
Vibration	<ul style="list-style-type: none"> <li>• 5-500 Hz, 3 g, for 10 mins on each of 3 axes</li> </ul>

### EMC & Safety

---

Emissions	<ul style="list-style-type: none"> <li>• EN55022 Level A conducted &amp; radiated with external components - contact technical sales</li> </ul>
ESD Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-2, Level 2 Perf Criteria A</li> </ul>
Radiated Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-3, 3 V/m Perf Criteria A</li> </ul>
Conducted Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-6, 3 V rms Perf Criteria A</li> </ul>

Input Voltage	Output Voltage	Output Current		Input Current <sup>(2)</sup>		Efficiency	Model Number <sup>(1)</sup>
		Min	Max	No Load	Full Load		
9-18 V	2.5 V	0 A	10.00 A	200 mA	2367 mA	88%	JCP4012S2V5
	3.3 V	0 A	10.00 A	200 mA	3090 mA	89%	JCP4012S3V3
	5.0 V	0 A	8.80 A	200 mA	3745 mA	89%	JCP4012S05
	12.0 V	0 A	3.33 A	200 mA	3703 mA	90%	JCP4012S12
	15.0 V	0 A	2.66 A	200 mA	3702 mA	90%	JCP4012S15
	±12.0 V	±0.09 A	±1.80 A	100 mA	4045 mA	89%	JCP4012D12
	±15.0 V	±0.07 A	±1.40 A	100 mA	3889 mA	90%	JCP4012D15
	3.3 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	200 mA	2784 mA	88%	JCP4012T0312
	3.3 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	200 mA	2727 mA	88%	JCP4012T0315
18-36 V	5.0 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	200 mA	3750 mA	88%	JCP4012T0512
	5.0 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	200 mA	3611 mA	90%	JCP4012T0515
	2.5 V	0 A	10.00 A	100 mA	1184 mA	88%	JCP4024S2V5
	3.3 V	0 A	10.00 A	100 mA	1545 mA	89%	JCP4024S3V3
	5.0 V	0 A	8.80 A	110 mA	1831 mA	91%	JCP4024S05
	12.0 V	0 A	3.33 A	100 mA	1811 mA	92%	JCP4024S12
	15.0 V	0 A	2.66 A	100 mA	1810 mA	92%	JCP4024S15
	±12.0 V	±0.09 A	±1.80 A	100 mA	1978 mA	91%	JCP4024D12
	±15.0 V	±0.07 A	±1.40 A	100 mA	1902 mA	92%	JCP4024D15
36-75 V	3.3 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	100 mA	1361 mA	90%	JCP4024T0312
	3.3 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	100 mA	1333 mA	90%	JCP4024T0315
	5.0 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	100 mA	1833 mA	90%	JCP4024T0512
	5.0 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	100 mA	1806 mA	90%	JCP4024T0515
	2.5 V	0 A	10.00 A	50 mA	585 mA	89%	JCP4048S2V5
	3.3 V	0 A	10.00 A	50 mA	764 mA	90%	JCP4048S3V3
	5.0 V	0 A	8.80 A	60 mA	926 mA	90%	JCP4048S05
	12.0 V	0 A	3.33 A	60 mA	916 mA	91%	JCP4048S12
	15.0 V	0 A	2.66 A	60 mA	906 mA	92%	JCP4048S15
36-75 V	±12.0 V	±0.09 A	±1.80 A	50 mA	1000 mA	90%	JCP4048D12
	±15.0 V	±0.07 A	±1.40 A	50 mA	962 mA	91%	JCP4048D15
	3.3 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	50 mA	688 mA	89%	JCP4048T0312
	3.3 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	50 mA	690 mA	87%	JCP4048T0315
	5.0 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	50 mA	938 mA	88%	JCP4048T0512
	5.0 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	50 mA	903 mA	90%	JCP4048T0515

Notes


1. Add suffix '-N' to model number for negative logic Remote On/Off.

2. Input current measured at nominal input voltage.

Mechanical Details


All dimensions are in inches (mm), Tolerance: ±0.02 (±0.5)  
 Weight: 65 g (0.14 lbs)

PIN CONNECTIONS			
Pin	Single	Dual	Triple
1	+V Input	+V Input	+V Input
2	-V Input	-V Input	-V Input
3	On/Off	On/Off	On/Off
4	NC	No Pin	+Aux. Output
5	-Sense	+V Output 1	Rtn
6	+Sense	Rtn	-Aux. Output
7	+Vout	Rtn	+V Output 1
8	Rtn	-V Output 2	Rtn
9	Trim	Trim	NC

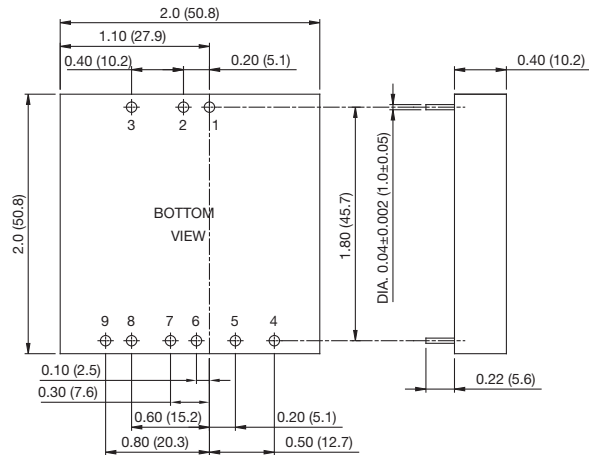

Application Notes

Derating Curve

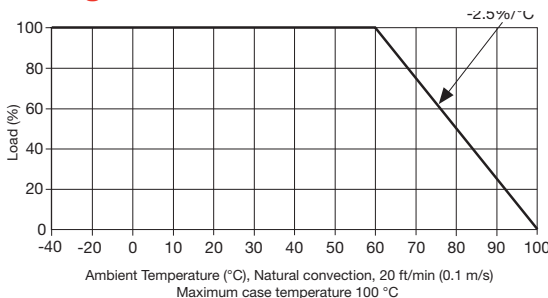

Remote On/Off Control

Standard ROF logic is positive.  
 Output On >3.5 to 75 VDC or open circuit  
 Output Off <1.8 VDC

Optional ROF logic is negative ('-N' version).  
 Output On <1.8 VDC  
 Output Off >3.5 to 75 VDC or open circuit

Remote Sense

If remote sense is not being used:  
 +Sense should be connected to +Vout  
 -Sense should be connected to Rtn.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [XP Power](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)  
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)