

3/6 Watts

JHM Series



- International Medical Approvals
- 3000 VAC Reinforced Insulation
- 60 ° C Operation Without Derating
- 2 μ A Patient Leakage Current
- DIP-24 Package
- EN55011 Level A With No External Components
- 3 Year Warranty

Specification

Input

Input Voltage Range	<ul style="list-style-type: none"> • 12 V (10-17 VDC) • 24 V (20-30 VDC)
Input Current	<ul style="list-style-type: none"> • See table
Inrush Current	<ul style="list-style-type: none"> • 25 A max at 30 V
Input Filter	<ul style="list-style-type: none"> • Pi network
Patient Leakage Current	<ul style="list-style-type: none"> • 2 μA max
Undervoltage Lockout	<ul style="list-style-type: none"> • 12 V model, on at <9 V, off >8.5 V • 24 V model on at <18.8 V, off >16 V
Input Surge	<ul style="list-style-type: none"> • 12 V models 25 V for 3 s • 24 V model 50 V for 3 s

Output

Output Voltage	<ul style="list-style-type: none"> • See table
Output Voltage Trim	<ul style="list-style-type: none"> • \pm10%
Minimum Load	<ul style="list-style-type: none"> • No minimum load required
Initial Set Accuracy	<ul style="list-style-type: none"> • \pm1% max
Start Up Delay	<ul style="list-style-type: none"> • 5 ms typical
Start Up Rise Time	<ul style="list-style-type: none"> • 2 ms typical
Line Regulation	<ul style="list-style-type: none"> • \pm0.3% max
Load Regulation	<ul style="list-style-type: none"> • \pm2% max 0% to 10% load, • \pm1% max 10% to 100% load
Cross Regulation	<ul style="list-style-type: none"> • \pm4% max on dual with one output set to 50% load and the other varied from 0% to 100% load
Transient Response	<ul style="list-style-type: none"> • 4% max deviation, recovery to within 1% in <500 μs for a 50% load change at 0.25 A/μs rate
Ripple & Noise	<ul style="list-style-type: none"> • 1% pk-pk max 20 MHz bandwidth
Overload Protection	<ul style="list-style-type: none"> • 120% - 200%
Overvoltage Protection	<ul style="list-style-type: none"> • 120% - 140%
Temperature Coefficient	<ul style="list-style-type: none"> • \pm0.03/$^{\circ}$C max
Short Circuit Protection	<ul style="list-style-type: none"> • Trip and restart (hiccup mode), auto recovery

General

Efficiency	<ul style="list-style-type: none"> • See tables
Isolation	<ul style="list-style-type: none"> • 5000 VAC for 10 ms (acc. to IEC60664-1), 3000 VAC reinforced isolation for 1 min.
Input to Output Capacitance	<ul style="list-style-type: none"> • 20 pF max
Switching Frequency	<ul style="list-style-type: none"> • JHM03: 180 kHz to 1.2 MHz variable • JHM06: 200 kHz to 1.6 MHz variable
Power Density	<ul style="list-style-type: none"> • JHM03: 7.5 W/in³, JHM06: 17.0 W/in³
MTBF	<ul style="list-style-type: none"> • >1 Mhrs typical to MIL-STD-217F at 25 $^{\circ}$C, GB

Environmental

Operating Temperature	<ul style="list-style-type: none"> • -20 $^{\circ}$C to +100 $^{\circ}$C, derate from 100% load at +60 $^{\circ}$C to no load at 100 $^{\circ}$C
Case Temperature	<ul style="list-style-type: none"> • +100 $^{\circ}$C max
Storage Temperature	<ul style="list-style-type: none"> • -40 $^{\circ}$C to +100 $^{\circ}$C
Operating Humidity	<ul style="list-style-type: none"> • 5-90%, non-condensing
Cooling	<ul style="list-style-type: none"> • Natural convection

EMC & Safety

Emissions	<ul style="list-style-type: none"> • EN55011 & EN55022 level A conducted & radiated with no external components
Immunity	<ul style="list-style-type: none"> • IEC60601-1-2, EN61204-3
ESD Immunity	<ul style="list-style-type: none"> • EN61000-4-2, level 2, Perf Criteria A
Radiated Immunity	<ul style="list-style-type: none"> • EN61000-4-3, 10 V/m Perf Criteria A
EFT/Burst	<ul style="list-style-type: none"> • EN61000-4-4, level 3 Perf Criteria A
Surge	<ul style="list-style-type: none"> • EN61000-4-5, level 1 Perf Criteria A
Conducted Immunity	<ul style="list-style-type: none"> • EN61000-4-6, 10 Vm, Perf Criteria A
Magnetic Field	<ul style="list-style-type: none"> • EN61000-4-8, 3 A/m Perf Criteria A
Safety Approvals	<ul style="list-style-type: none"> • ANSI/AMMI ES60601-1 3rd Edition • CSA-22.2 No.60601-1:2008 • IEC60601-1 3rd Edition

Models and Ratings


Input Voltage	Output Voltage	Output Current	Input Current		Maximum Capacitive Load	Efficiency ⁽³⁾	Model Number
			No Load ⁽¹⁾	Full Load ⁽²⁾			
10-17 V	5.0 V	600 mA	52 mA	380 mA	720 μ F	75%	JHM0312S05
	12.0 V	250 mA	64 mA	370 mA	300 μ F	77%	JHM0312S12
	15.0 V	200 mA	64 mA	370 mA	240 μ F	78%	JHM0312S15
	± 12.0 V	± 125 mA	66 mA	400 mA	± 140 μ F	80%	JHM0312D12
	± 15.0 V	± 100 mA	85 mA	400 mA	± 120 μ F	80%	JHM0312D15
20-30 V	5.0 V	600 mA	47 mA	210 mA	720 μ F	74%	JHM0324S05
	12.0 V	250 mA	42 mA	200 mA	300 μ F	77%	JHM0324S12
	15.0 V	200 mA	29 mA	190 mA	240 μ F	81%	JHM0324S15
	± 12.0 V	± 125 mA	40 mA	200 mA	± 140 μ F	80%	JHM0324D12
	± 15.0 V	± 100 mA	50 mA	190 mA	± 120 μ F	80%	JHM0324D15
10-17 V	5.0 V	1200 mA	72 mA	790 mA	1200 μ F	78%	JHM0612S05
	12.0 V	500 mA	86 mA	750 mA	500 μ F	80%	JHM0612S12
	15.0 V	400 mA	85 mA	740 mA	400 μ F	83%	JHM0612S15
	± 12.0 V	± 250 mA	60 mA	730 mA	± 250 μ F	83%	JHM0612D12
	± 15.0 V	± 200 mA	80 mA	730 mA	± 200 μ F	84%	JHM0612D15
20-30 V	5.0 V	1200 mA	44 mA	380 mA	1200 μ F	78%	JHM0624S05
	12.0 V	500 mA	39 mA	360 mA	500 μ F	83%	JHM0624S12
	15.0 V	400 mA	27 mA	350 mA	400 μ F	85%	JHM0624S15
	± 12.0 V	± 250 mA	37 mA	360 mA	± 250 μ F	83%	JHM0624D12
	± 15.0 V	± 200 mA	39 mA	360 mA	± 200 μ F	83%	JHM0624D15

Notes

1. Input current measured at nominal input voltage.
2. Input current measured at lowest input voltage.

3. Typical values.

Mechanical Details

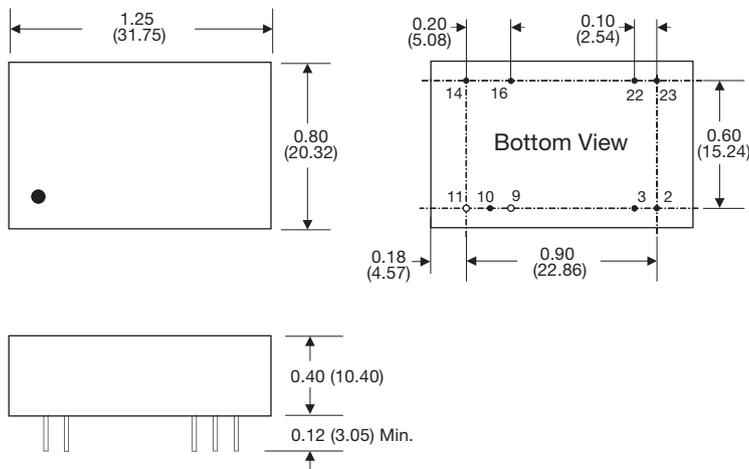


Pin Connections		
Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
10	Trim	Trim
11	No Pin	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Notes

1. All dimensions are in inches (mm)
2. Weight: 0.04 lbs (20 g) approx.
3. Pin diameter: 0.02 \pm 0.002 (0.5 \pm 0.05)
4. Pin pitch tolerance: \pm 0.014 (\pm 0.35)
5. Case tolerance: \pm 0.02 (\pm 0.5)

Application Notes

External Output Trim

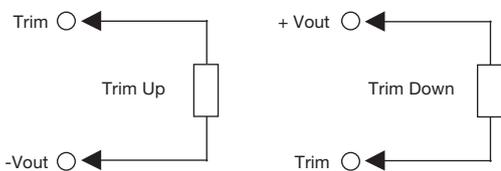

For 5 V output:
 Trim +10%, R = 3.4 k typical
 Trim -10%, R = 1 k typical

For 12 V output:
 Trim +10%, R = 5.9 k typical
 Trim -10%, R = 11.3 k typical

For 15 V output:
 Trim +10%, R = 8.3 k typical
 Trim -10%, R = 10 k typical

For ± 12 V output:
 Trim +10%, R = 12.8 k typical
 Trim -10%, R = 9.5 k typical

For ± 15 V output:
 Trim +10%, R = 18 k typical
 Trim -10%, R = 14.8 k typical

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [XP Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)