

JTB03/05 Series



- 4:1 Input Range
- DIP-24 Metal Package
- Operating Temperature -25°C to $+100^{\circ}\text{C}$
- Fully Regulated Single & Dual Outputs
- Optional 1500 VDC Isolation
- Continuous Short Circuit Protection
- 3 Year Warranty

Specification

Input

Input Voltage Range	• 24 V (9-36 VDC) 48 V (18-72 VDC)
Input Current	• See table
Input Filter	• Pi network
Input Surge	• 24 V models 50 V for 100 ms 48 V models 100 V for 100 ms

Output

Output Voltage	• See table
Output Voltage Balance	• $\pm 1\%$ max, dual output models
Initial Set Accuracy	• $\pm 2\%$ max
Start Up Delay	• 90 ms max
Start Up Rise Time	• 35 ms typical
Line Regulation	• $\pm 0.5\%$ max (high line to low line)
Load Regulation	• $\pm 0.5\%$ max single output models, $\pm 1.0\%$ max for dual output models
Cross Regulation	• 2.2% on dual output models
Transient Response	• $< 1.5\%$ max deviation, recovery to within 1% in 800 μs for a 50% load change
Ripple & Noise	• 100 mV or 1% pk-pk, whichever is greater, 20 MHz bandwidth
Overcurrent Protection	• JTB03: $> 170\%$ fold back at nominal input voltage JTB05: $> 130\%$ constant power
Short Circuit Protection	• JTB03: Continuous, hiccup mode, auto-restart JTB05: Continuous, current limit, auto-restart
Maximum Capacitive Load	• 10,000 μF
Temperature Coefficient	• $\pm 0.05/^{\circ}\text{C}$ max

General

Efficiency	• See table
Isolation	• JTB03: 500 VDC Input to Output 1500 VDC Input to Output, add suffix '-H' JTB05: 1500 VDC Input to Output
Isolation Capacitance	• 80 pF max
Switching Frequency	• Variable 100-700 kHz
MTBF	• > 1.0 Mhrs to MIL-HDBK-217F at 25 μC , GB

Environmental

Operating Temperature	• -25°C to $+100^{\circ}\text{C}$, derate linearly from 100% load at $+70^{\circ}\text{C}$ to no load at 100 μC
Case Temperature	• $+100^{\circ}\text{C}$ max
Storage Temperature	• -40°C to $+100^{\circ}\text{C}$
Shock	• 30 g, half sine wave 18 ms pulse applied 3 times on each of 6 axes
Vibration	• 5-500 Hz, 3 g, for 10 mins on each of 3 axes

EMC

Emissions	• EN55022, level A conducted & radiated with external components, see application note
ESD Immunity	• EN61000-4-2, level 2 Perf Criteria A
Radiated Immunity	• EN61000-4-3, 3 V/m Perf Criteria A
Conducted Immunity	• EN61000-4-6, 3 V rms Perf Criteria A

Models and Ratings

Input Voltage ⁽¹⁾	Output Voltage	Output Current	Input Current ⁽³⁾		Efficiency	Model Number ^(2,4)
			No Load	Full Load		
9-36 VDC	3.3 VDC	600 mA	15.0 mA	117 mA	70%	JTB0324S3V3
	5.0 VDC	600 mA	15.0 mA	174 mA	72%	JTB0324S05
	12.0 VDC	250 mA	15.0 mA	165 mA	76%	JTB0324S12
	15.0 VDC	200 mA	15.0 mA	165 mA	76%	JTB0324S15
	±5.0 VDC	±300 mA	25.0 mA	179 mA	70%	JTB0324D05
	±12.0 VDC	±125 mA	25.0 mA	174 mA	72%	JTB0324D12
	±15.0 VDC	±100 mA	25.0 mA	174 mA	72%	JTB0324D15
18-72 VDC	3.3 VDC	600 mA	7.5 mA	58 mA	70%	JTB0348S3V3
	5.0 VDC	600 mA	7.5 mA	87 mA	72%	JTB0348S05
	12.0 VDC	250 mA	7.5 mA	81 mA	77%	JTB0348S12
	15.0 VDC	200 mA	7.5 mA	81 mA	77%	JTB0348S15
	±5.0 VDC	±300 mA	12.0 mA	88 mA	71%	JTB0348D05
	±12.0 VDC	±125 mA	12.0 mA	87 mA	72%	JTB0348D12
	±15.0 VDC	±100 mA	12.0 mA	87 mA	70%	JTB0348D15
9-36 VDC	3.3 VDC	1000 mA	15.0 mA	191 mA	72%	JTB0524S3V3
	5.0 VDC	1000 mA	15.0 mA	267 mA	78%	JTB0524S05
	12.0 VDC	470 mA	15.0 mA	294 mA	80%	JTB0524S12
	15.0 VDC	400 mA	15.0 mA	313 mA	80%	JTB0524S15
	±5.0 VDC	±500 mA	25.0 mA	267 mA	78%	JTB0524D05
	±12.0 VDC	±230 mA	25.0 mA	288 mA	80%	JTB0524D12
	±15.0 VDC	±190 mA	25.0 mA	297 mA	80%	JTB0524D15
18-72 VDC	3.3 VDC	1000 mA	7.5 mA	100 mA	70%	JTB0548S3V3
	5.0 VDC	1000 mA	7.5 mA	134 mA	78%	JTB0548S05
	12.0 VDC	470 mA	7.5 mA	149 mA	79%	JTB0548S12
	15.0 VDC	400 mA	12.0 mA	157 mA	80%	JTB0548S15
	±5.0 VDC	±500 mA	12.0 mA	135 mA	77%	JTB0548D05
	±12.0 VDC	±230 mA	12.0 mA	146 mA	79%	JTB0548D12
	±15.0 VDC	±190 mA	12.0 mA	149 mA	80%	JTB0548D15

Notes


- Nominal input voltage 24 or 48 VDC.
- For optional 1500 VDC isolation add suffix '-H' to model number (JTB03 models only).
- Input current is at nominal input voltage.
- Surface mount versions with plastic case available in OEM quantities. Consult sales

Mechanical Details and Application Note

All dimensions are in inches (mm)
 Weight: 0.04 lbs (20 g) approx.

JTB03 Pin Connections		
Pin	Single Output	Dual Output
1	+V input	+V input
2	N/C	-V output
3	N/C	Common
9	No pin	No pin
10	-V output	Common
11	+V output	+V output
12	-V input	-V input
13	-V input	-V input
14	+V output	+V output
15	-V output	Common
16	No pin	No pin
22	N/C	Common
23	N/C	-V output
24	+V input	+V input


JTB03-H & JTB05 Pin Connections		
Pin	Single Output	Dual Output
1	No pin	No pin
2	-V input	-V input
3	-V input	-V input
9	N/C	Common
10	N/C	N/C
11	N/C	-V output
12	No pin	No pin
13	No pin	No pin
14	+V output	+V output
15	N/C	N/C
16	-V output	Common
22	+V input	+V input
23	+V input	+V input
24	No pin	No pin

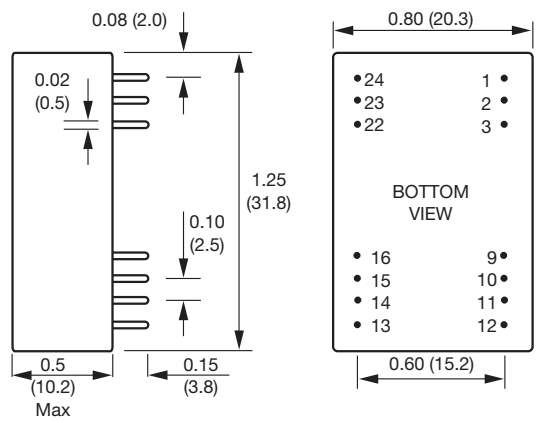

Pin diameter tolerance: ±0.00079 (±0.02)
 Pin pitch tolerance: ±0.01 (±0.25)
 Case tolerance: ±0.02 (±0.5)

Input Filter

JTB05	JTB03
24 Vin: 220 µF	47 µF
48 Vin: 47 µF	47 µF



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [XP Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)