

### 10 Watts

- Regulated Single & Dual Output
- Wide 4:1 Input Range
- 1" x 1" Package
- 1500 VDC Isolation
- Operating Temperature -40 °C to +100 °C
- ITE Safety Approvals
- Remote On/Off
- Optional Heatsink
- Six Sided Metal Case
- 3 Year Warranty



#### Dimensions:

##### JWK10:

1.00 x 1.00 x 0.40" (25.4 x 25.4 x 10.16 mm)


### Models & Ratings

Input voltage	Output voltage	Output current		Input current <sup>(3)</sup>		Maximum capacitive load <sup>(2)</sup>	Efficiency	Model number
		Min	Max	No load	Full load			
9-36 V	3.3 V	330 mA	2.20 A	30 mA	350 mA	560 µF	86%	JWK1024S3V3
	5 V	300 mA	2.00 A		495 mA	560 µF	84%	JWK1024S05
	5.1 V	300 mA	2.00 A		505 mA	560 µF	84%	JWK1024S5V1
	12 V	125 mA	0.83 A		485 mA	150 µF	86%	JWK1024S12
	15 V	100 mA	0.66 A		475 mA	150 µF	87%	JWK1024S15
	24 V	62 mA	0.41 A		475 mA	68 µF	86%	JWK1024S24
	±5 V	±150 mA	±1.00 A		495 mA	±220 µF	84%	JWK1024D05
	±12V	±62 mA	±0.41 A		475 mA	±100 µF	86%	JWK1024D12
	±15V	±50 mA	±0.33 A		475 mA	±100 µF	87%	JWK1024D15
18-75 V	3.3 V	330 mA	2.20 A	20 mA	180 mA	560 µF	85%	JWK1048S3V3
	5 V	300 mA	2.00 A		250 mA	560 µF	84%	JWK1048S05
	5.1 V	300 mA	2.00 A		255 mA	560 µF	84%	JWK1048S5V1
	12 V	125 mA	0.83 A		240 mA	150 µF	86%	JWK1048S12
	15 V	100 mA	0.66 A		235 mA	150 µF	87%	JWK1048S15
	24 V	62 mA	0.41 A		240 mA	68 µF	86%	JWK1048S24
	±5 V	±150 mA	±1.00 A		250 mA	±220 µF	84%	JWK1048D05
	±12 V	±62 mA	±0.41 A		240 mA	±100 µF	86%	JWK1048D12
	±15 V	±50 mA	±0.33 A		235 mA	±100 µF	87%	JWK1048D15


### Notes

1. Input currents measured at nominal input voltage.
2. Input current is typically 10 mA at nominal input voltage when output is turned off using remote on/off.
3. Maximum capacitive load is per output.
4. Add suffix "-HK" for optional heatsink.

### Mechanical Details



#### Optional Heatsink (-HK)



#### Pin Connections

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off

#### Notes

1. All dimensions are in inches (mm)
2. Weight: 0.03 lbs (15.0g) approx.
3. Tolerance: X.XX±0.01 (X.X±0.25) X.XXX±0.005 (X.XX±0.13)
4. Pin Tolerance: ±0.002 (±0.05)

### Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage Range	9.0		36	VDC	24 V nominal
	18.0		75	VDC	48 V nominal
Input Filter	Internal Pi type				
Input Surge			50	VDC for 1 s	24 V models
			100		48 V models
Undervoltage Lockout	ON at >8.5 V, OFF at <9 V				24 V models
	ON at >18 V, OFF at <17 V				48 V models
Remote On/Off	ON: Logic high (2.5-50 V) or open circuit OFF: Logic low (<1.0 V) or short pin 2 to pin 6				

### Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage	3.3		30	VDC	See Models and Ratings table
Initial Set Accuracy			±2.0	%	At full load
Output Voltage Balance		±1.0	±2.0	%	For dual output with balanced loads
Minimum Load				A	No minimum load required
Line Regulation			±1.0	%	From minimum to maximum input at full load
Load Regulation			±0.5/±1.0	%	Single / Dual output, from 0 to full load
Cross Regulation			±5.0	%	On dual output models when one load is varied between 25% and 100% and other is fixed at 100%
Transient Response		3	6	% deviation	Recovery within 1% in less than 600 µs for a 25% load change.
Ripple & Noise		100		mV pk-pk	20 MHz bandwidth. Measured using 0.47 µF ceramic capacitor.
Overload Protection		150		%	
Short Circuit Protection					Continuous Trip & Restart (Hiccup mode), with auto recovery
Maximum Capacitive Load					See Models and Ratings table
Temperature Coefficient			0.02	%/°C	

### General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		86		%	See Models and Ratings table
Isolation: Input to Output	1500/1800			VDC	60 s/1 s
Isolation Resistance	10 <sup>9</sup>			Ω	At 500 VDC
Isolation Capacitance			1500	pF	
Switching Frequency		450		kHz	
Power Density			50.8	W/in <sup>3</sup>	
Mean Time Between Failure		350		kHrs	MIL-HDBK-217F, +25 °C GB
Weight		0.03 (15.0)		lb (g)	

### Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-40		+100	°C	See Derating Curve.
Storage Temperature	-50		+125	°C	
Case Temperature			+100	°C	
Humidity			95	%RH	Non-condensing
Cooling					Natural convection

### Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
UL	UL60950-1, UL62368-1	ITE



### EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	EN55022	Class A	


### EMC: Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
ESD	EN61000-4-2	±8 kV air discharge, ±6 kV contact	A	
Radiated	EN61000-4-3	10 V/m	A	
EFT/Burst	EN61000-4-4	±2 kV	A	With external capacitor, suggested part is CHEMI-CON KY 330µF/100V
Surge	EN61000-4-5	±1 kV	A	With external capacitor, suggested part is CHEMI-CON KY 330µF/100V
Conducted	EN61000-4-6	10 V rms	A	

### Mechanical Details

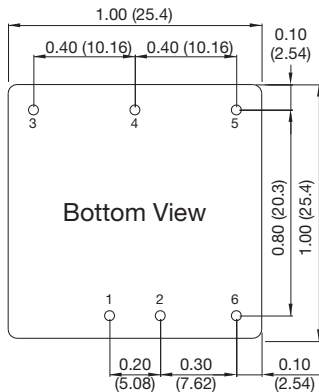

### Optional Heatsink (-HK)

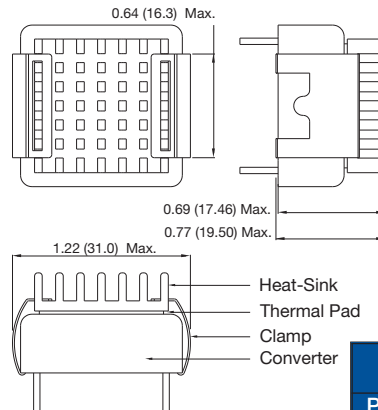

### Notes


- All dimensions are in inches (mm)
- Weight: 0.03 lbs (15.0g) approx.
- Tolerance: X.XX±0.01 (X.X±0.25)  
X.XXX±0.005 (X.XX±0.13)
- Pin Tolerance: ±0.002 (±0.05)

### Pin Connections

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off

### Application Notes

#### Derating Curve

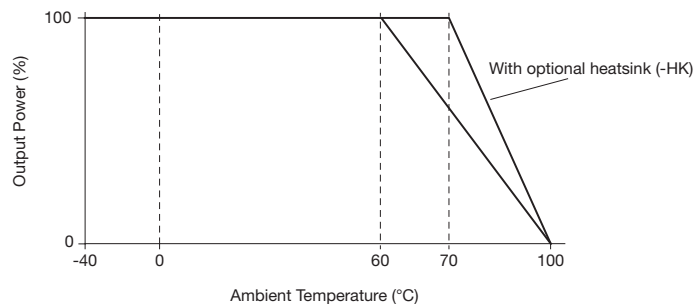

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [XP Power](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [18362](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [19-130041](#)  
[CE-1003](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-](#)  
[1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-1212](#)  
[XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-](#)  
[7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#) [CK2540-9ERT](#) [AK-1615-7R](#)