

500 Watts

- 450-500W forced cooled
- 250W convection cooled
- Class II applications
- Medical (BF) safety approvals
- U-channel 4" x 7" package
- 5V standby & 12V fan supply
- AC OK, inhibit & remote sense
- Class B conducted & radiated emissions
- 3 year warranty



Dimensions:

PBL500 (U-channel):

7.1 x 4.00 x 1.56" (180.34 x 101.6 x 39.62 mm)

PBL500 (Covered) :

7.1 x 4.00 x 2.64" (180.34 x 101.6 x 67.05 mm)

The Class II PBL500 series of AC-DC switching power supplies, in a package of just 4 x 7 x 1.56 inches, deliver 450-500 watts of continuous power with forced air cooling or 250 watts with convection cooling. The units are constructed on a U-Channel for mechanical support and heat sinking. A cover and fan assembly can be added during manufacturing. They are designed for medical applications including those needing BF rated insulation with an operation altitude up to 5000 meters.


Models & Ratings

Output Voltage V1	Output Current V1		Standby Supply V2	Fan Supply V3	Output Power		Ripple & Noise ⁽³⁾	Model Number ⁽¹⁾
	Convection	Forced			Convection	Forced ⁽²⁾		
12 V	20.83 A	37.50 A	5.0 V / 2.0 A	12.0 V / 0.3 A	250 W	450 W	120 mV	PBL500PS12B
15 V	16.67 A	30.00 A					150 mV	PBL500PS15B
18 V	13.89 A	27.78 A					180 mV	PBL500PS18B
24 V	10.42 A	20.84 A			500 W	240 mV	PBL500PS24B	
28 V	8.93 A	17.86 A				280 mV	PBL500PS28B	
36 V	8.94 A	13.89 A				360 mV	PBL500PS36B	
48 V	5.21 A	10.42 A				480 mV	PBL500PS48B	
57 V	4.38 A	8.78 A				570 mV	PBL500PS57B	

Notes

1. For covered version, replace B in the part number with C, e.g PBL500PS12C. V3 not available on covered version.
2. 250 W without moving air or 450-500 W with 30 CFM forced air provided by the user. 450-500 W for '-C' version
3. Ripple and noise is the maximum peak-to-peak voltage value measured at the output with 20 MHz bandwidth, at rated line voltage and output load, and with a 10 μ F tantalum capacitor in parallel with a 0.1 μ F ceramic capacitor.

Temperature Derating Curve

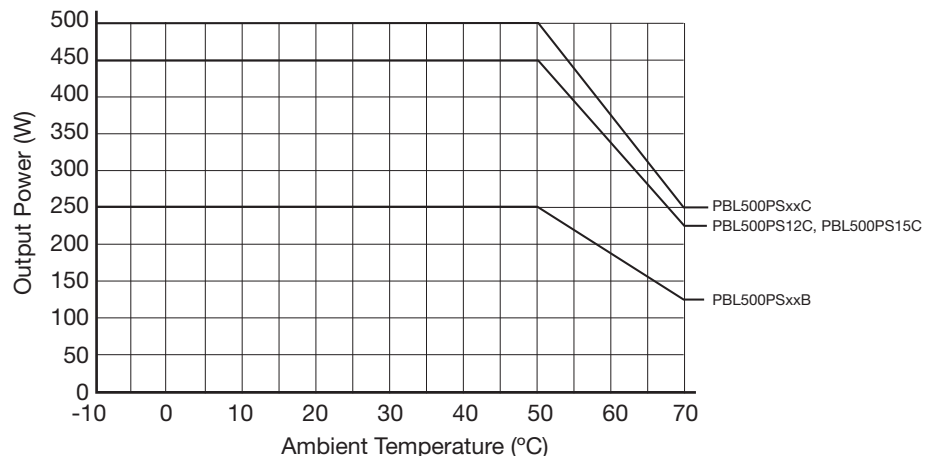

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	80		264	VAC	Derate to 90% at 85 VAC & 80% at 80 VAC
Input Frequency	47		63	Hz	
Input Current - Full Load		5.2/2.6		A (rms)	115/230 VAC, 60/50 Hz
Inrush Current		30/60		A	115 VAC/230 VAC at 25 °C, cold start

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage (V1)	12		57	VDC	See Models and Ratings table
Tolerance			±2	%	Line and Load Regulation, 0.1% minimum load required to meet specification
Transient Response			4	%	Recovery within 1% in less than 500 µs for a 25% step load change
Ripple & Noise			1	% pk-pk	20 MHz bandwidth, see model table notes
Overvoltage Protection	112		140	%	Latching
Overcurrent Protection	115		140	%	Trip & restart characteristic
Thermal Shutdown					Protected for overtemperature conditions, latching
Temperature Coefficient			±0.04	%/°C	
5 V Standby Supply (V2)		5		V	At 2.0 A
Fan Supply (V3)		12		V	At 300 mA
Patient Leakage Current		50	80	µA	264 VAC, 63 Hz

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-10		+70	°C	Derate Linearly from 100% load at +50 °C to 50% load at +70 °C
Storage Temperature	-40		+85	°C	
Humidity	5		95	%RH	Non-condensing
Cooling					Integral temperature controlled fan. Fan speed based on temperature of transformer T1, internally monitored. Fan will not rotate until T1 temperature reaches approx. 30 °C and reaches full speed when T1 temperature reaches approx. 60 °C.

General

Characteristic		Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency			90		%	230 VAC, 100% load
Isolation	Input to Output	4000			VAC	2 x MOPP
	Input to Case	4000			VAC	2 x MOPP
	Output to Case	1500			VAC	1 x MOPP
Switching Frequency	PFC	55	65	75	kHz	Fixed
	Main Converter	90		300		Variable
	Standby Converter	80		120		Variable
Hold Up Time		20			ms	At 110 VAC & 500 W
Mean Time Between Failure			100,000		Hrs	MIL-HDBK-217F, Full load at 25 °C GB
Weight			2.23 (1011.5)		lb (g)	PBL500PSxxB
			2.52 (1143.0)			PBL500PSxxC

Signals & Controls

Characteristic	Notes & Conditions
Remote Sense	Compensates for 0.5 V total voltage drop.
Inhibit	To inhibit, apply TTL high signal.
AC OK	TTL high for normal operation, low upon loss of input power, turn-on delay time 100-1000 ms, turn-off delay time 1 ms minimum.

EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	EN55011	Class B	
Radiated	EN55011	Class B	
Harmonic Current	EN61000-3-2	Class A	
Voltage Fluctuations	EN61000-3-3		

EMC: Immunity


Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
ESD	EN61000-4-2	4	A	±8 kV contact, ±15 kV air
Radiated	EN61000-4-3	10 V/m	A	
EFT	EN61000-4-4	±2 kV	A	
Surges	EN61000-4-5	Installation class 3	A	±1 kV differential/ ±2 kV common mode
Conducted	EN61000-4-6	10 Vrms	A	
Magnetic Field	EN61000-4-8	30 A/m	A	
Dips and Interruptions	100 VAC/50 Hz	Dip 30% (70 VAC), 500ms	A	
		Dip 60% (40 VAC), 100ms	B	
		Int >95% (0 VAC), 10ms	A	
		Int 100% (0 VAC), 20ms	A	
		Int 100% (0 VAC), 5000ms	B	
	240 VAC/50 Hz	Dip 30% (168 VAC), 500ms	A	
		Dip 60% (96 VAC), 100ms	A	
		Int >95% (0 VAC), 10ms	A	
		Int 100% (0 VAC), 20ms	A	
		Int 100% (0 VAC), 5000ms	B	

Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
CB Report	IEC60601-1	Medical
UL	ES60601-1, CSA C22.2 No.60601-1	Medical
TUV	EN60601-1	Medical

Mechanical Details

PBL500PSxxB

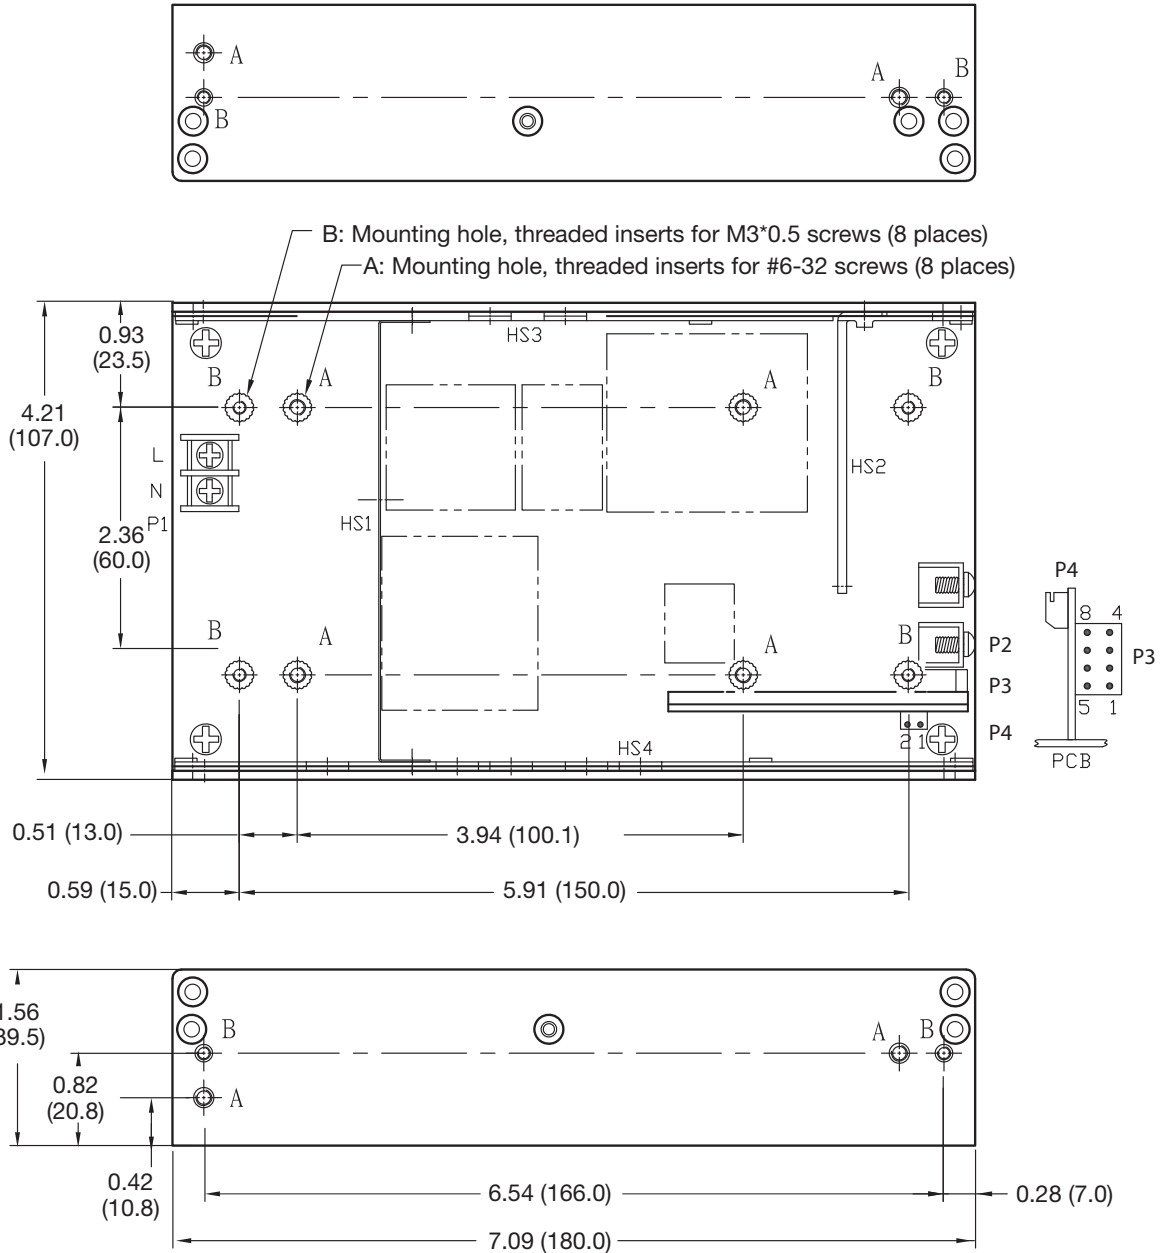

Input Connector - P1	
Pin 1	L
Pin 2	N

Output Connector - P2	
Pin 1	V1+
Pin 2	V1 Return


P3			
Pin 1	Common Return	Pin 5	Inhibit
Pin 2	+V1 Sense	Pin 6	+5V Standby
Pin 3	-V1 Sense	Pin 7	N/C
Pin 4	AC OK	Pin 8	N/C

Output Connector - P4	
Pin 1	Common Return
Pin 2	+V3

- Notes**
- Dimensions shown in inches [mm]
 - Tolerance 0.02 [0.5] maximum
 - Input connector P1 is Dinkle terminal P/N DT-35C-B01W-03, with nickel plated M3 screws.
 - Output connector P2 is M4x0.7 screw connections.
 - Connector P3 is Molex header 87833-08 or equivalent, mating with Molex housing 51110-0850 or equivalent.
 - Fan connector P4 is JST header S2B-ZR-3.4 or equivalent, mating with JST housing ZHR-2 or equivalent.
 - Weight: 1.0 Kg (2.23 lbs.) approx. for U-bracket form, 1.14 Kgs. (2.52 lbs.) approx. for enclosed form
 - Maximum penetration of fixing screws is 4 mm from the outer surface of chassis.

Mechanical Details

PBL500PSxxC

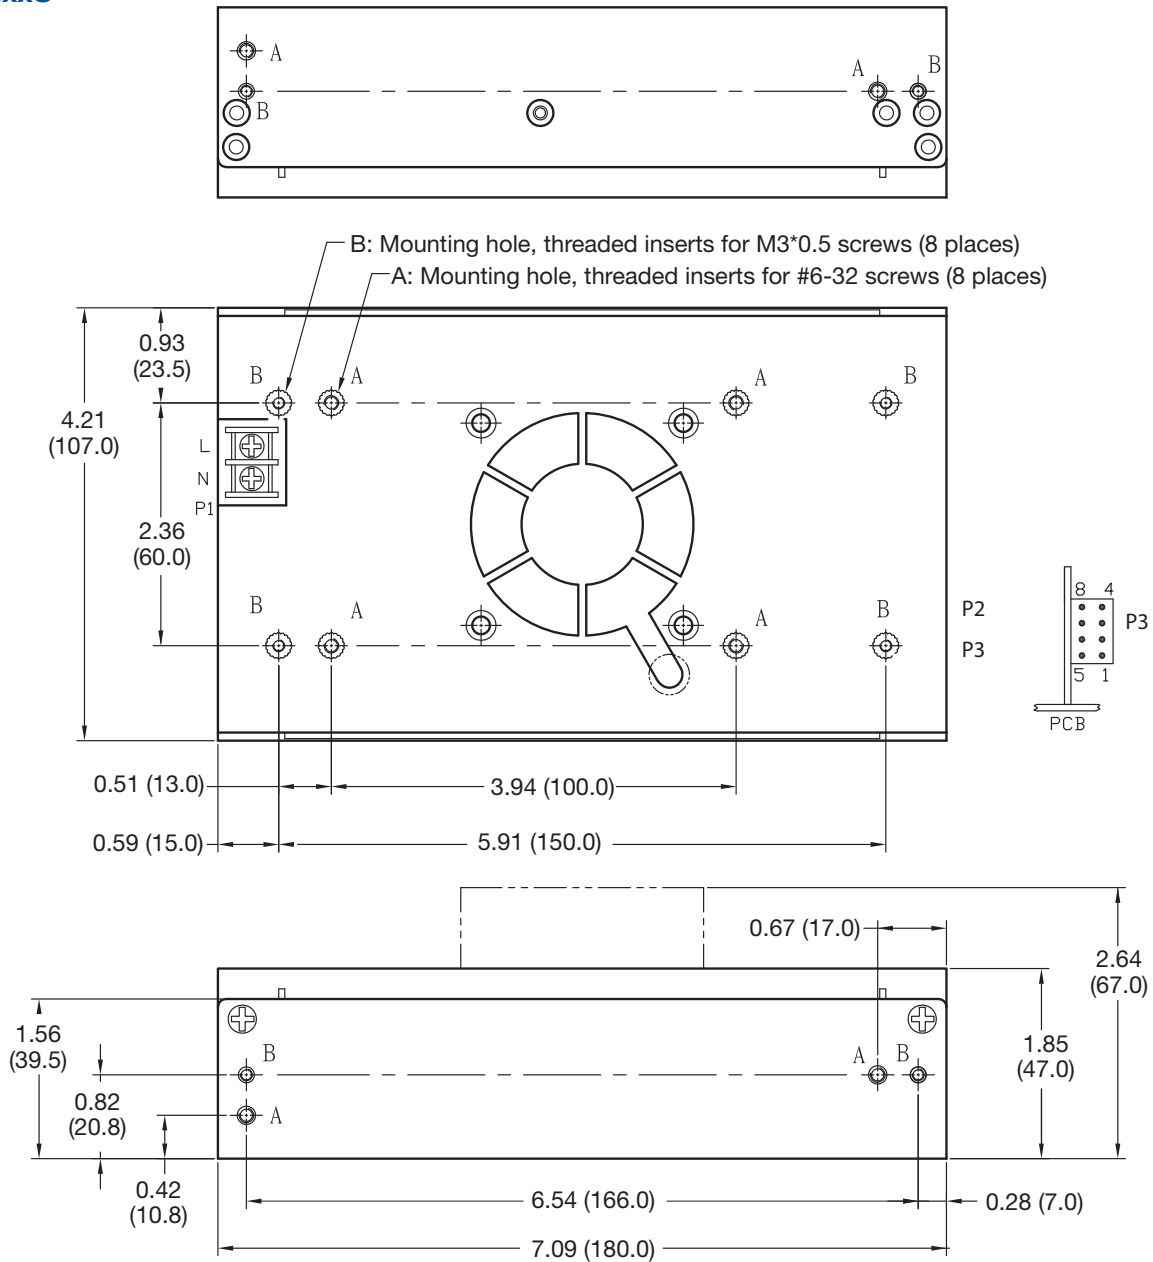

Input Connector - P1	
Pin 1	L
Pin 2	N

Output Connector - P2	
Pin 1	V1+
Pin 2	V1 Return

P3			
Pin 1	Common Return	Pin 5	Inhibit
Pin 2	+V1 Sense	Pin 6	+5V Standby
Pin 3	-V1 Sense	Pin 7	N/C
Pin 4	AC OK	Pin 8	N/C

Notes

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Input connector P1 is Dinkle terminal P/N DT-35C-B01W-03, with nickel plated M3 screws.
- Output connector P2 is M4x0.7 screw connections.
- Connector P3 is Molex header 87833-08 or equivalent, mating with Molex housing 51110-0850 or equivalent.
- Weight: 1.0 Kg (2.23 lbs.) approx. for U-bracket form, 1.14 Kgs. (2.52 lbs.) approx. for enclosed form
- Maximum penetration of fixing screws is 4 mm from the outer surface of chassis.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [XP Power](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)