


**xsens**

# MTi 100-series

The most accurate and complete MEMS based IMU, VRU and AHRS

- ✓ Highest performance with resistance to magnetic distortions
- ✓ Vibration-rejecting gyroscopes and accelerometers
- ✓ Configurable output settings, synchronizes with any 3rd party device

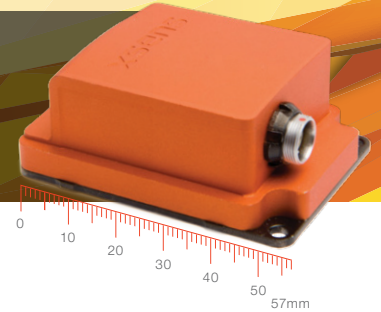

## Innovative Xsens sensor fusion algorithm

- Superior heading tracking using Active Heading Stabilization (AHS)
- In-run Compass Calibration (ICC)
- State-of-the-art XEE sensor fusion algorithm
- Selectable filter profiles for range of applications
- Tuned for performance under vibrations and magnetic distortions

## Best-in-class hardware design

- Highest quality industrial grade components
- Vibration-rejecting gyroscopes and accelerometers
- Low latency for real-time applications
- 10 kHz simultaneous sampling, 2 kHz SDI algorithm with coning/sculling compensation
- Wide array of synchronization options

## Easy software integration

- Extensive suite of configurable output formats, calculated onboard the MTi
- MT Software Suite with intuitive GUI
- Complete SDK for all operating systems
- Support for Robotic Operating System (ROS)
- Xsens Xbus protocol or ASCII (NMEA)
- Access to BASE (by Xsens), an extensive knowledge base and community forum

## Specification highlights

- Available as IP67 encased MTi or OEM board
- Choice of several interfaces and onboard USB
- All Xsens products are fully interchangeable
- Cost-effective system integrator solution
- Internal low-noise barometer

## Product overview

		MTi-100 IMU	MTi-200 VRU	MTi-300 AHRS
<b>Calibrated Sensor Data</b>		yes	yes	yes
Roll/pitch	Static	-	0.2°	0.2°
	Dynamic	-	0.3°	0.3°
Yaw	In homogenous magnetic field	-	Active Heading Stabilization (AHS)	1.0°

All above specifications based on typical application scenarios

## Sensor specification

	Gyroscopes	Accelerometers
Standard full range *	+/- 450 °/s	+/- 20 g
Initial bias error	0.2 °/s	5 mg
In-run bias stability	10 °/h	15 µg
Bandwidth (-3 dB)	415 Hz	375 Hz
Noise density	0.01 °/s/√Hz	60 µg/√Hz
g-sensitivity (calibrated)	0.003 °/s/g	N/A
Non-orthogonality	0.05 deg	0.05 deg
Non-linearity	0.01%	0.1%

	Magnetometer	Barometer
Standard full range	+/- 8 G	300-1100 hPa
Total RMS noise	0.5 mG	3.6 Pa
Non-linearity	0.2%	N/A
Resolution	0.25 mG	8 cm (sea level, 15 °C)

\* Optional +/- 1000 °/s available on request.

## System specifications


<b>Input voltage</b>	4.5 to 34V or 3V3	<b>Output frequency</b>	Up to 2 kHz
<b>Typical power consumption</b>	600 mW @ 5V	<b>Interfaces</b>	RS232/RS422/RS485/USB UART
<b>IP-rating</b>	IP67 (encased)	<b>Latency</b>	<2 ms
<b>Temperature (in use)</b>	-40 to 85 °C	<b>Sync options</b>	SyncIn, SyncOut, Clock sync
<b>Vibration</b>	MIL-STD-202-201A/204C/214A	<b>Interface protocol</b>	Xbus or ASCII (NMEA)
<b>Casing material</b>	Anodized aluminum 6082	<b>Mounting orientation</b>	No restriction, full 360° in all axes
<b>Sampling frequency</b>	10 kHz/channel (60 kS/s)	<b>Built-in self test (BIT)</b>	Gyroscopes, accelerometers, magnetometer
<b>Clock drift</b>	10 ppm or external reference	<b>MTBF</b>	300,000 hours



MTi 100-series  
Development Kit:  
MTi, software and cabling



MTi encased:  
57x42x23.5 mm, 52g,  
9-pins push-pull connector



MTi OEM:  
37x33x12 mm, 11g,  
16-pins header

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for IMUs - Inertial Measurement Units category:*

*Click to view products by XSENS manufacturer:*

Other Similar products are found below :

[BMI055](#) [LSM303AGRTR](#) [IMU381ZA-200](#) [IMU383ZA-400](#) [4464](#) [4502](#) [4517](#) [ADIS16362BMLZ](#) [ADIS16364BMLZ](#) [ADIS16365BMLZ](#)  
[ADIS16445BMLZ](#) [ADIS16465-1BMLZ](#) [ADIS16465-2BMLZ](#) [ADIS16467-1BMLZ](#) [ADIS16470AMLZ](#) [ADIS16475-3BMLZ](#) [ADIS16477-3BMLZ](#) [ADIS16495-2BMLZ](#) [ADIS16497-2BMLZ](#) [ADIS16505-3BMLZ](#) [ADIS16505-1BMLZ](#) [ADIS16505-2BMLZ](#) [ADIS16507-2BMLZ](#)  
[ADIS16507-1/PCBZ](#) [ADIS16507-2/PCBZ](#) [BMI088](#) [BMI160](#) [BMX055](#) [TARS-HCASS](#) [3DM-GX5-GNSS/INS](#) [LSM6DSLTR](#) [MPU-6050](#)  
[SCC2130-D08-05](#) [SCC2230-D08-05](#) [SCC2230-E02-05](#) [FMT1010T](#) [FMT1020T](#) [MTI-300-2A8G4](#) [MTI-200-2A8G4](#) [MTI-G-710-2A8G4](#)  
[LSM6DS3TR](#) [TARS-LCASS](#) [MTi-7-0I-T](#) [ADIS16375BMLZ](#) [ADIS16477-2BMLZ](#) [ADIS16490BMLZ](#) [ADIS16489BMLZ-P](#) [MTi-30-2A8G4](#)  
[ICM-30670](#) [SEN0373](#)