


[ XM-L2 U3 LED ]

**Maximum Output 1100Lm,  
50000h Lifespan,  
Orange Peel Reflector.**



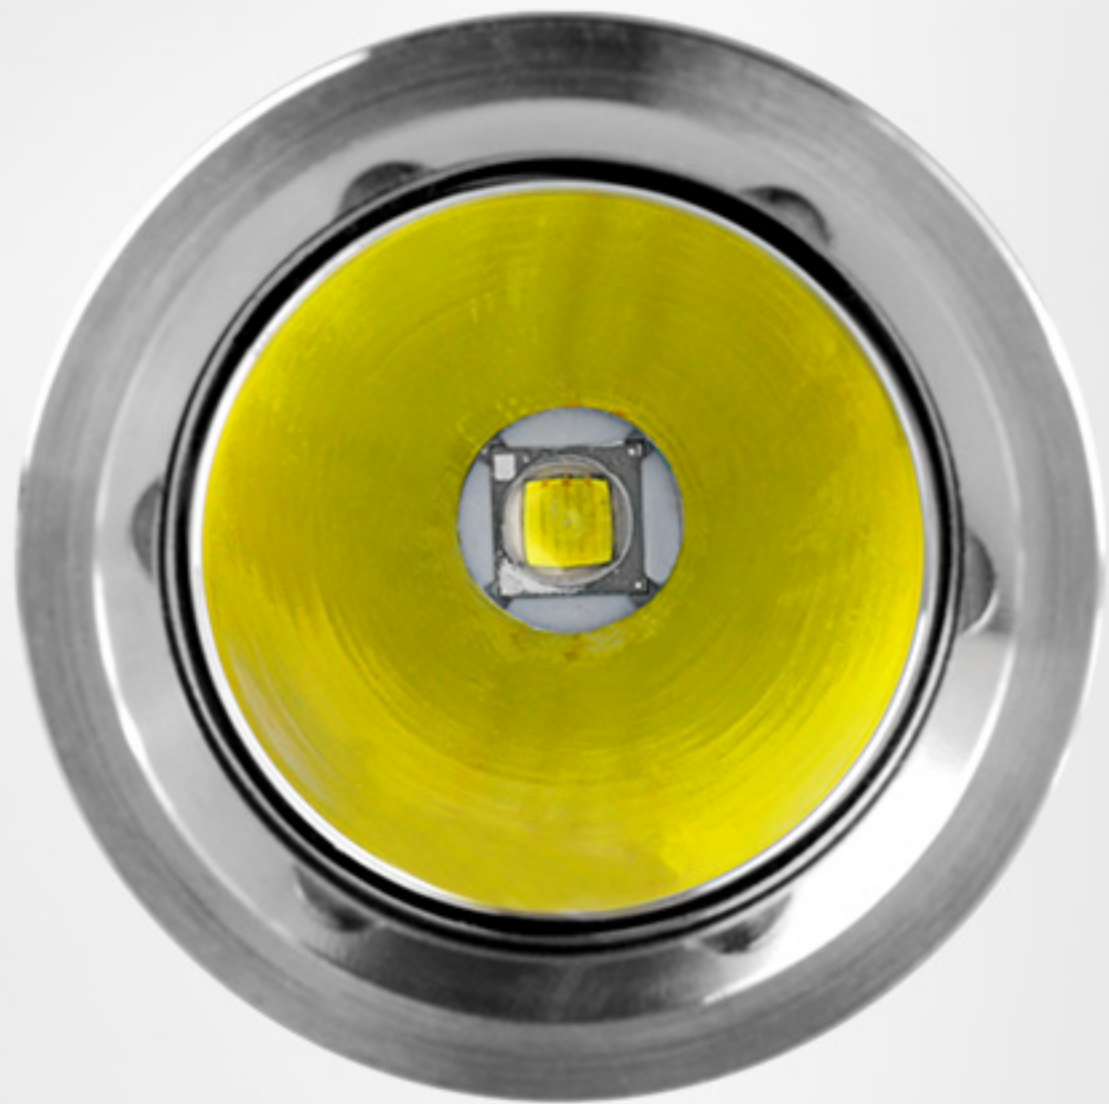

## [ Glass Lens ]

**Ultra-clear Tempered Glass Lens with Anti-reflective Coating.**

Common Glass: 89-92% Transmittance.

**98.5  
%**

Transmittance



**Low mode 30Lm**  
Runtime 75h




**Mid mode/Signal 250Lm**  
Runtime 8.5h(Only Mid mode)



**High mode 600Lm**  
Runtime 3.5h



**Turbo mode 1100Lm**  
Runtime 3.3h



## [ Lighting Modes ]

**Wide Beam with Superior Distance.**

1. 4 Lighting modes: Low Mid High Turbo.
2. 1 Hidden modes: Signal.
3. Max output 1100Lm.
4. Max Intensity 13225cd.
5. Beam Throw 230m.

XTAR

## [ Switch ]

### **Rear forward tactical switch.**

Environmental friendly waterproof silicone material plus wear-resisting feature.





## [ Use Method ]

### **Ergonomic design, More comfortable to hold and operate.**

1. One switch with double operation method: Click heavily to turn on/off and change modes directly Flip for momentary on, click heavily for locked on.
2. Signal mode: When the B20 Pilot II is closed, Quick double-click to get Hidden signal mode.







[ **Stainless Steel Clip** ]

**Sturdy and durable.**

Anodized aircraft 6N01 aluminum alloy  
Type III Hard-anodized anti-abrasive finish.





[ Low Heat Design ]

**Excellent heat dissipation design.  
Extend flashlight lifespan.**



[ Appearance design ]

Headstand, Tailstand,  
Anti-roll.





## [ Spring, Circuit ]

**Dual anti-oxidant Gold-plated spring  
Avoid the poor contact.**

+ Transverse conductive, reversive polarity protection, more secure.  
High efficiency drive circuit, runtime curve is more stable.



## [ Battery Type ]

**Compatible with  
18650 Li-ion battery and 18700 Li-ion battery**







[ Waterproof Level ]  
**Waterproof IPX8**  
(Underwater 2m)






## [ Application Range ]

### **Versatile.**



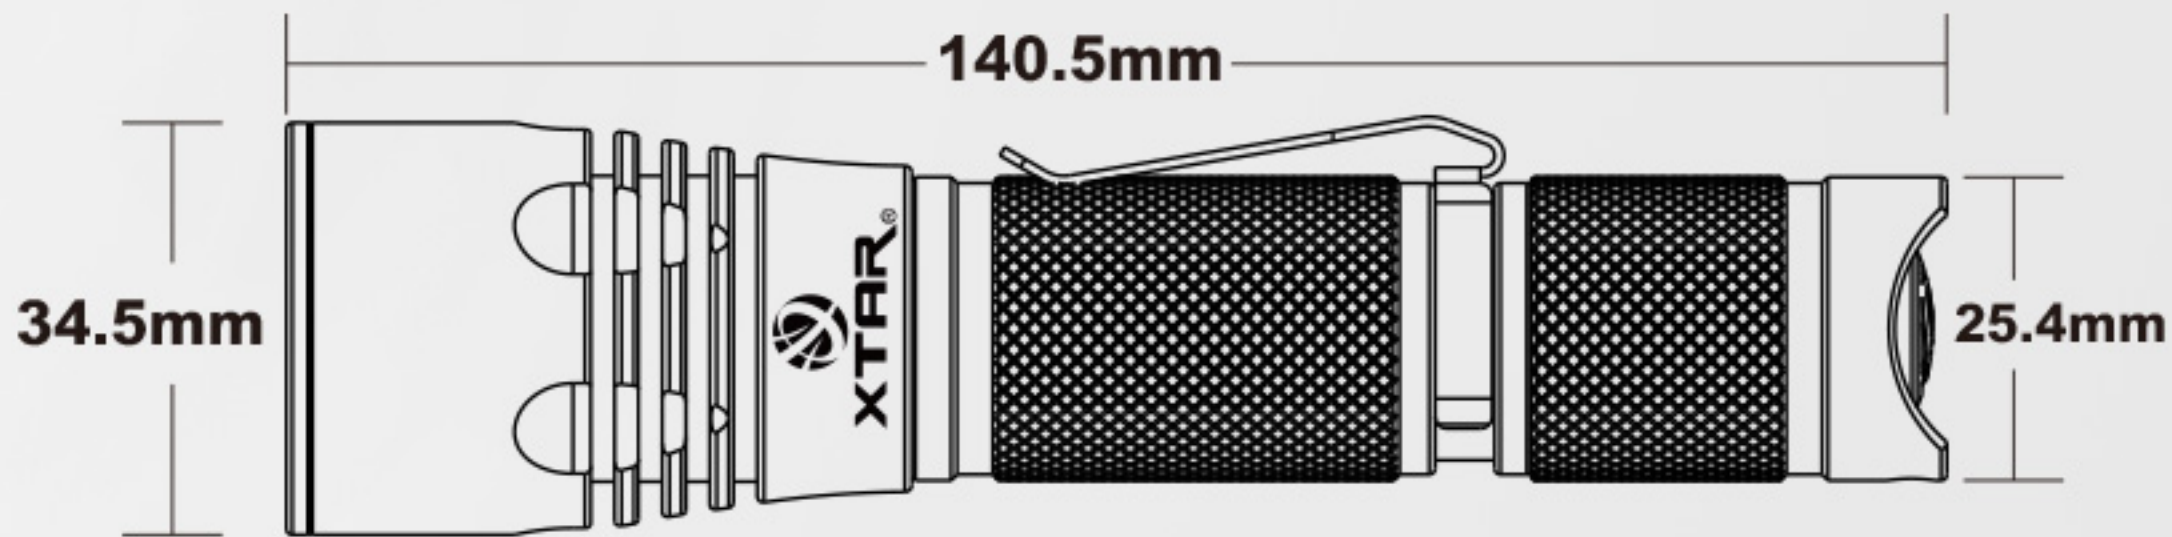



Max beam throw 230m, Orange Peel Reflector, wide beam, beautiful floodlight, suitable for various usage.





[ Size and Net Weight ]

**Net Weight: 120.0g (Battery excluded).**

	Turbo	High	Middle	Low	Signal
 Luminance	1100Lm	600Lm	250Lm	30Lm	250Lm
 Runtime	3.3h	3.5h	8.5h	75h	/
 Beam Throw	230m				
 Max Intensity	13225cd				
 Impact Resistant	1.5m				
 Waterproof	IPX8				
LED	CREE XM-L2 U3				
Material	Anodized aircraft 6N01 aluminium alloy, Type III hard-anodized anti-abrasive finish				
Working Voltage	2.75V~4.2V				
Batteries	1 × 18650				
Switch	Rear Forward Tactical Switch				
Size	Φ34.5mm(Head dia) × Φ25.4mm(Body dia) × Φ25.4mm(Tail dia) × 140.5mm(Length)				
Net Weight	120g (Excluded battery)				
Additional Functions	Memory function, Reverse polarity protection				
Package Contents	Flashlight, Stainless Steel clip, Lanyard, Holster, Spare O-ring, Manual, Warranty Card				
Optional Accessories	Battery or Charger				



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Other Tools](#) category:*

*Click to view products by [Xtar](#) manufacturer:*

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [CRCW04021100FRT7](#)  
[CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-](#)  
[WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [011349-000](#) [LTLA506SBLAMNBL](#) [CRCW08052740FRT1](#) [LUC-](#)  
[012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#)  
[LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-](#)  
[KT39](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)