


SM Series Standard 105°C (7MML高)




◆FEATURES

- Design for space-saving and high density insertion.
- Endurance 1000 hours at 105°C
- RoHS Compliant

◆SPECIFICATIONS

Items	Characteristics																					
Category Temperature Range	-40°C~+105°C																					
Rated Voltage Range	6.3VDC~50VDC																					
Nominal Capacitance Range	0.1µF~470µF																					
Capacitance Tolerance	±20% (M) (+20°C, 100/120Hz)																					
Leakage Current(Max,+20°C)	I=0.01CV or 3(µA) After 2 minutes whichever is greater measured with rated working voltage applied.																					
Dissipation Factor Tanδ(+20°C,120Hz)	<table border="1"> <thead> <tr> <th>Rated voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Tanδ</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </tbody> </table>	Rated voltage	6.3	10	16	25	35	50	Tanδ	0.24	0.20	0.16	0.14	0.12	0.10							
Rated voltage	6.3	10	16	25	35	50																
Tanδ	0.24	0.20	0.16	0.14	0.12	0.10																
Low Temperature Stability (Max.Impedance Rate)	<table border="1"> <thead> <tr> <th>Rated voltage(V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Z-25°C/Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated voltage(V)	6.3	10	16	25	35	50	Z-25°C/Z+20°C	4	3	2	2	2	2	Z-40°C/Z+20°C	8	6	4	4	3	3
Rated voltage(V)	6.3	10	16	25	35	50																
Z-25°C/Z+20°C	4	3	2	2	2	2																
Z-40°C/Z+20°C	8	6	4	4	3	3																
Load Life	After applying rated working voltage for 1000 hours at 105°C and then being stabilized at +20°C , capacitors shall meet the following limits. <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial measured value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Less than 200% of the specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Capacitance change	Within ±20% of the initial measured value	Dissipation Factor	Less than 200% of the specified value	Leakage Current	Within specified value															
Capacitance change	Within ±20% of the initial measured value																					
Dissipation Factor	Less than 200% of the specified value																					
Leakage Current	Within specified value																					
Shelf Life	After storage for 1000 hours at 105°C with no voltage applied and then being stabilized at +20°C, capacitors shall meet the following limits. <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial measured value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Less than 200% of the specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Less than 200% of the specified value</td> </tr> </table>	Capacitance change	Within ±20% of the initial measured value	Dissipation Factor	Less than 200% of the specified value	Leakage Current	Less than 200% of the specified value															
Capacitance change	Within ±20% of the initial measured value																					
Dissipation Factor	Less than 200% of the specified value																					
Leakage Current	Less than 200% of the specified value																					
Other	JISC-5141 EIAJ RC-2372																					

◆CASE SIZE TABLE (mm)

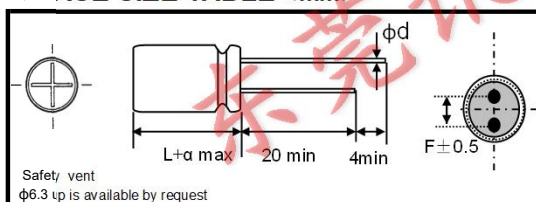

φD	4	5	6.3	8
F	1.5	2.0	2.5	3.5
φd	0.45	0.50		
α	1.0			


◆RIPPLE CURRENT MULTIPLIER

Cap (µF)	Freq (Hz) and multiplier				
	50 (60)	100 (120)	300	1K	100K
≤47	0.75	1.00	1.35	1.57	2.00
56~470	0.80	1.00	1.23	1.34	1.50

◆TEMPERATURE COEFFICIENT

Temperature (°C)	+105	+85	+65
Factor	1.0	1.6	1.85

◆PART NUMBER SYSTEM (EXAMPLE : 16V 10µF 4×7)

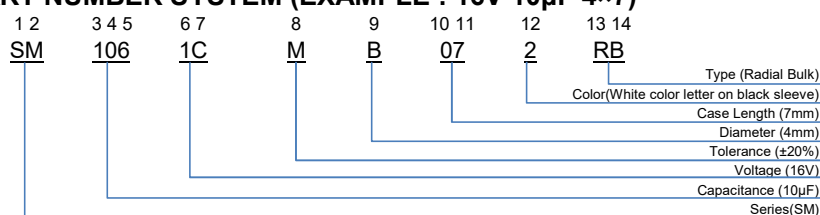

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Xunda](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [1814181](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#)
[NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#)
[NEVH3.3M450CC](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [476CKH100MSA](#) [477RZS050M](#)
[UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#) [511D336M250EK5D](#) [052687X](#) [ECE-](#)
[A1CF471](#) [EKXG451ELL820MM30S](#) [686CKR050M](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)
[NEV4700M35HI](#) [NEV4.7M100BA](#) [NEV47M16BA](#) [NEV47M50CB-BULK](#) [NEVH1.0M350AB](#) [NEVH2.2M160AB](#) [NEVH3.3M350BC](#)
[TER330M50GM](#) [477KXM035MGBWSA](#)