



DC-028S-AXXX
W11.60xD10.00xH9.10

插座内芯(Inner core) : $\Phi 2.0/\Phi 2.5$

耐电压(Withstand voltage) : 500V AC for 1 min

插座外孔(Outer hole): $\Phi 6.0$

操作寿命(Operation life): 5,000 Cycles Min

温度范围(Operating temp): -20°C TO +70°C

插拔力(Operating force): 3~20N

额定负荷(Rated load): DC 30V 3A

焊接方式(Welding mode): 贴片式/SMT

接触电阻(Contact resistance): $\leq 0.03\Omega$

包装方式(Packaging method): 散装/Bulk



绝缘电阻(Insulation resistance): $\geq 100M\Omega$

最小包装(Minimum packing): 1,000/PCS

外形尺寸(UNIT:MM) / Size Chart



www.xunpuodianzi.com

更多资料请参考技术选型档!

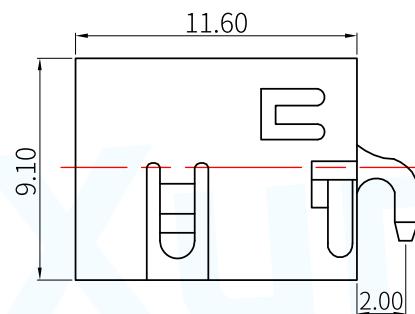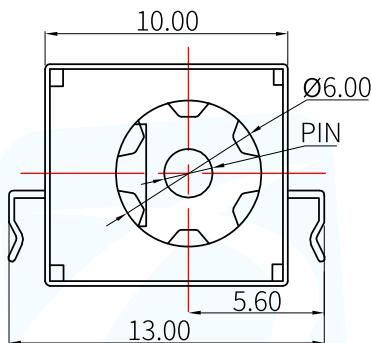

| Pin | Part No | Current |
|------------|--------------|---------|
| $\Phi 2.0$ | DC-028S-A200 | 10A |
| $\Phi 2.5$ | DC-028S-A250 | 10A |

线路板安装(UNIT:MM) / Mounting Dimensions

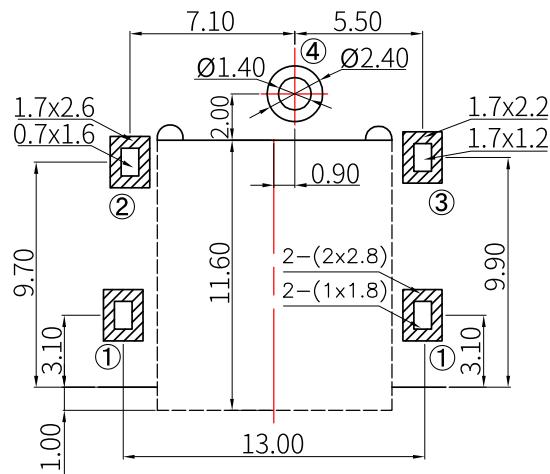


CIRCUIT DIAGRAM

P.C.B LAYOUT(copper-side view)

● 回流焊/Reflow soldering

适用表面贴装型产品/Applicable to surface mount products

温度分布/Temperature distribution

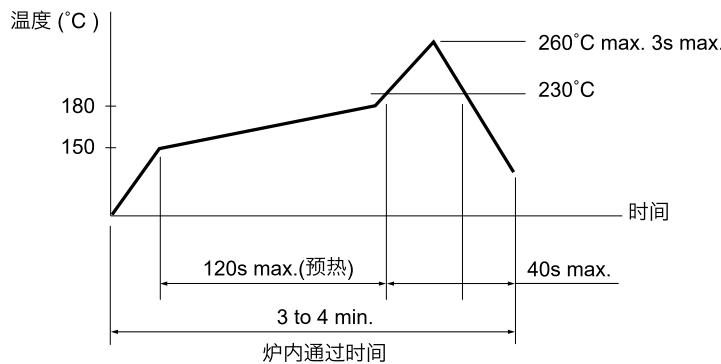

注:

1. 加热方式:以远红外线下加热方式。
2. 温度测量:用Φ0.1~0.2 的 CA(K)或 CC(T)测量位置在焊接连接部(锡/铜箔面)。
3. 固定方式:采用耐热胶带。

● 手焊式/Hand welding

| 项目/Project | 条件/condition |
|-----------------------------------|--------------|
| 焊接温度 Welding temperature | 350°C max. |
| 持续焊接时间 Continuous welding time | 3s max. |
| 焊剂斗容量 Flux bucket capacity | 60W max. |

● 浸焊式/Immersion soldering

| 项目/Project | 条件/condition |
|------------------------------------|---|
| 助焊剂附着量 Flux adhesion | 不附着于零部件贴装面的程度 Not attached to the mounting surface of components |
| 预热温度 Preheating temperature | 印刷电路板焊接面的周围温度 100°C max. The temperature around the welding surface of PCB is 100 °C max |
| 预热温度时间 Preheat temperature time | 60s max. |
| 焊接温度 welding temperature | 260°C max. |
| 焊接浸渍时间 Welding immersion time | 5s max. |
| 焊接次数 Welding times | 2 times max. |

讯普电子 — 连接器、开关制造品牌！

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [xunpu](#) manufacturer:

Other Similar products are found below :

[SIM-114](#) [TYC-342-24CB16](#) [SMN-315-ARP7](#) [TF-107](#) [TS-1003S-BR09016](#) [SD-107](#) [MU-0111](#) [TS-1002S-BR06516](#) [TS-1003S-BR07016](#)
[HDMI-001C](#) [MCS-302-KT1](#) [SMN-305-ARP7](#) [USB-256-BRWH150](#) [SMC-217-KT](#) [TF-107-KT1](#) [MCS-303-C1](#) [USB-B12-BRW](#) [MCS-303-A1](#) [TYC-340-16CB16](#) [PJ-5410-CB1](#) [PJ-5410-BS1](#) [PJ-5411-BS1](#) [TS-1002S-BR07516](#) [TS-1003-09526](#) [TS-1002S-10526C](#) [TS-1003S-08026](#)
[TS-1003-07026](#) [SMN-327-KT1](#) [SMN-327](#) [UX-155-AR](#) [TS-1002N-09526](#) [TS-1001V-AR04326](#) [MCS-303-B1](#) [TF-101A-P3](#) [TS-1003-BR10516](#) [TS-1002S-BR10516](#) [TS-1101-AR006016](#) [TS-1002S-BR06016](#) [TS-1003S-BR08516](#) [TS-1003-06526](#) [TS-1003-BR11016](#) [TS-1003-11526](#) [TS-1104-AR006016](#) [TS-1003-12026](#) [TS-1009S-04526](#) [USB-234-ACY](#) [USB-255-BRWH130](#) [USB-211-BCW](#) [TS-1002S-11526C](#) [TS-1003S-05526](#)