
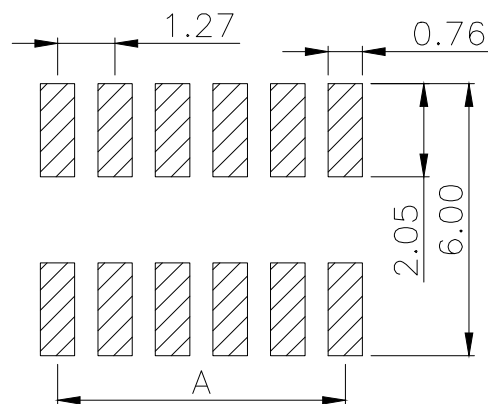



SPECIFICATIONS
 Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40° to +105°
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Phosphor bronze
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240°C for 30-60 seconds
 (260°C for 5 seconds)

| P/N | PIN | DIM.A | DIM.B |
|-----------------|-------|--------------|------------|
| FH1.27-02-01PWS | 1 | 0.00 | 1.27 |
| FH1.27-02-02PWS | 2 | 1.27 | 2.54 |
| FH1.27-02-03PWS | 3 | 2.54 | 3.81 |
| FH1.27-02-04PWS | 4 | 3.81 | 5.08 |
| FH1.27-02-05PWS | 5 | 5.08 | 6.35 |
| FH1.27-02-06PWS | 6 | 6.35 | 7.62 |
| FH1.27-02-07PWS | 7 | 7.62 | 8.89 |
| FH1.27-02-08PWS | 8 | 8.89 | 10.16 |
| FH1.27-02-09PWS | 9 | 10.16 | 11.43 |
| | | | |
| FH1.27-02-50PWS | 50 | (PIN-1)x1.27 | (PIN)x1.27 |

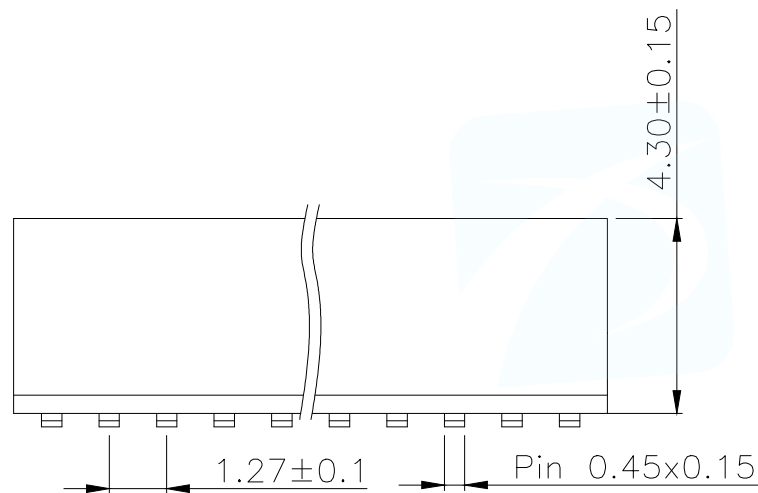

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

PART NUMBER DESCRIPTION:

FH1.27-02-NPWS

(D=单排; S=双排)
 (Z=直脚; W=弯脚)
 (PIN数量; 01.....50PIN)
 (排针开关)

| | | | |
|---------------------------------------|------------|--|--|
| MANUFACTURE DWG | | 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | | TITLE: 1.27FH H4.3 2xNPIN SMT U型 PC4.8 PB4.6 6T |
| DECIMALS: | ANGLES: | | PAR FH1.27-02-NPWS |
| X.±0.30 | X°±5' | | DWN |
| X.X±0.20 | X.X°±1' | | CHKD |
| X.XX±0.10 | X.XX°±0.5' | APVD | SCALE N:A UNIT:MM |
| CUSTOMER COPY | | SIZE:A4 | SHEET:1F1 REV:A |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XUNPU](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)