
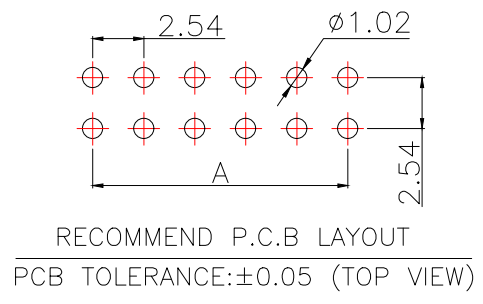



SPECIFICATIONS

Current Rating: 3Amps  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 20mΩ Max  
 Withstanding Voltage: AC 1000V  
 Operation Temperature: -40°to+105°  
 Contact Material: Brass  
 Insulator Material: Polyester(UL 94V-0)  
 Contact plating: Gold Flash  
 Standard: PA6T  
 Max.Processing Temp: 240°C for30-60seconds (260°Cfor10seconds)

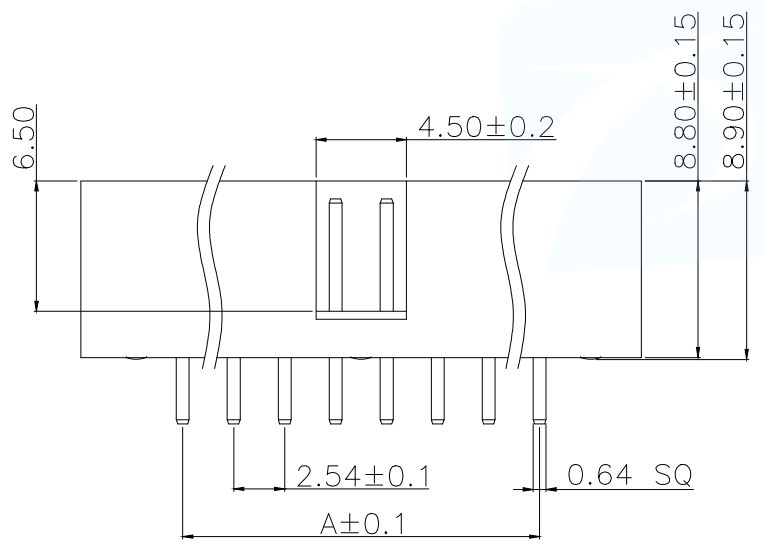

| P/N              | PIN | DIM.A | DIM.B |
|------------------|-----|-------|-------|
| IDC2.54-01-06PZS | 6   | 5.08  | 7.62  |
| IDC2.54-01-08PZS | 8   | 7.62  | 10.16 |
| IDC2.54-01-10PZS | 10  | 10.16 | 12.70 |
| IDC2.54-01-12PZS | 12  | 12.70 | 15.24 |
| IDC2.54-01-14PZS | 14  | 15.24 | 17.78 |
| IDC2.54-01-16PZS | 16  | 17.78 | 20.32 |
| IDC2.54-01-18PZS | 18  | 20.32 | 22.86 |
| IDC2.54-01-20PZS | 20  | 22.86 | 25.40 |
| IDC2.54-01-24PZS | 24  | 27.94 | 30.48 |
| IDC2.54-01-26PZS | 26  | 30.48 | 33.02 |
| IDC2.54-01-28PZS | 28  | 33.02 | 35.56 |
| IDC2.54-01-30PZS | 30  | 35.56 | 38.10 |
| IDC2.54-01-32PZS | 32  | 38.10 | 40.64 |
| IDC2.54-01-34PZS | 34  | 40.64 | 43.18 |
| IDC2.54-01-36PZS | 36  | 43.18 | 45.72 |
| IDC2.54-01-40PZS | 40  | 48.26 | 50.80 |
| IDC2.54-01-44PZS | 44  | 53.34 | 55.88 |
| IDC2.54-01-50PZS | 50  | 60.96 | 63.50 |
| IDC2.54-01-60PZS | 60  | 73.66 | 76.20 |
| IDC2.54-01-64PZS | 64  | 78.74 | 81.28 |

PART NUMBER DESCRIPTION:

IDC2.54-01-NPZS

(D=单排;S=双排)  
 (Z=直脚;W=弯脚)  
 (PIN数量;06.....64PIN)  
 (排针开关)

|                                       |            |   |  |
|---------------------------------------|------------|---|--|
| MANUFACTURE DWG                       |            | 东莞市讯普电子科技有限公司<br>DongGuan XunPu Electronics Co.,Ltd |  |
| UNLESS OTHERWISE SPECIFIED TOLERANCES |            |   | TITLE:2.54DC3-NPin H8.9 180度<br>PC3.2 L11.5 6T |
| DECIMALS:                             | ANGLES:    |   | PAR IDC2.54-01-NPZS                            |
| X.±0.30                               | X°±5'      |   | DWN  |
| X.X±0.20                              | X.X°±1'    |   | CHKD   |
| X.XX±0.10                             | X.XX°±0.5' | APVD  | SCALE N:A UNIT:MM                              |
| CUSTOMER COPY                         |            | SIZE:A4   | UNIT:MM  |
|                                       |            | SHEET:1F1   | REV:A  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Connectors](#) category:*

*Click to view products by [XUNPU](#) manufacturer:*

Other Similar products are found below :

[571763P](#) [59811-0000](#) [61-168618-12P](#) [D20419-211](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [DX40-50P\(55\)](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [91-569786-35H](#) [SM3100RC14S-9P-115](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDR-E14MSG1+](#) [54182-0605](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [DRA-26PC-F0R](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [ZP-4008-66L](#) [10-565995-597N](#) [10-584459-12P](#) [DX40-20P\(55\)](#) [5554841-1](#) [SM3100F14S-12P](#) [SM3106F14S-7S-LC](#) [SM3106R18-18S](#) [U90B3054061110](#) [U65-E04-4020](#) [557-262M2-06C](#) [PCS-96LFD+](#) [60-042222-02S](#) [10099439-003C-TRLF](#) [226-0348-000](#)