

- NOTES :
1. ELECTRICAL CHARACTERISTICS
 - 1-1. CONTACT RESISTANCE : 60 Milliohms Max
 - 1-2. INSULATION RESISTANCE : 1,000 Megohms Min
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE : 250V AC FOR 1 MINUTE
 2. MECHANICAL CHARACTERISTICS
 - 2-1. OPERATION TEMPERATURE RANGE : -40 ~ +80
 - 2-2. DURABILITY : 3,000 CYCLES
 3. MATERIAL :
 - 3-1. HOUSING : THERMOPLASTIC,UL 94-V0
 - 3-2. TERMINAL : PHOSPHOR BRONZE
 - 3-3. SHELL : STAINLESS STEEL
 4. FINISHED :
 - 4-1. TERMINAL : NI PLATED UNDER, AU PLATED ON CONTACT AREA, G/F PLATED ON SOLDER TAIL
 - 4-2. SHELL : NI PLATED UNDER, G/F PLATED ON SOLDER TAIL

| | | | | |
|------|--------------|------|------|---------|
| MAPX | MODIFICATION | DATE | DRAW | APPROVE |
| | | | | |

| NANO SIM | P/N | Description |
|----------|-----|-------------|
| P1 | A/B | VCC |
| P2 | A/B | RST |
| P3 | A/B | CLK |
| P4 | A/B | CLK |
| P5 | A/B | GND |
| P6 | A/B | VPP |
| P7 | A/B | I/O |

| T-CARD | P/N | Description |
|--------|-----|-------------|
| T1 | | DAT2 |
| T2 | | CD/DAT3 |
| T3 | | CMD |
| T4 | | VDD |
| T5 | | CLK |
| T6 | | VSS) |
| T7 | | DAT0 |
| T8 | | DAT1 |

MANUFACTURE DWG
 Dongguan Xunpu Electronics Co.Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES

| | | |
|-----------|---------|---------------|
| DECIMALS: | ANGLES: | CUSTOMER COPY |
| X:±0.20 | X:±1° | |
| X:±0.25 | X:±1° | |
| X:±0.30 | X:±2° | |





QR CODE

SCALE: 1:1
 UNIT: mm

SIZE: A4
 SHEET: 1/1
 REV: A

PAR MCS-304
 DWN KING
 CHKD KING
 DWN KING
 2012.3.08

TITLE: 2.5H 3 CHOSE 2 双座卡座 (DUAL NANO OR NANO+T-CARD) FOR CUSTOMER

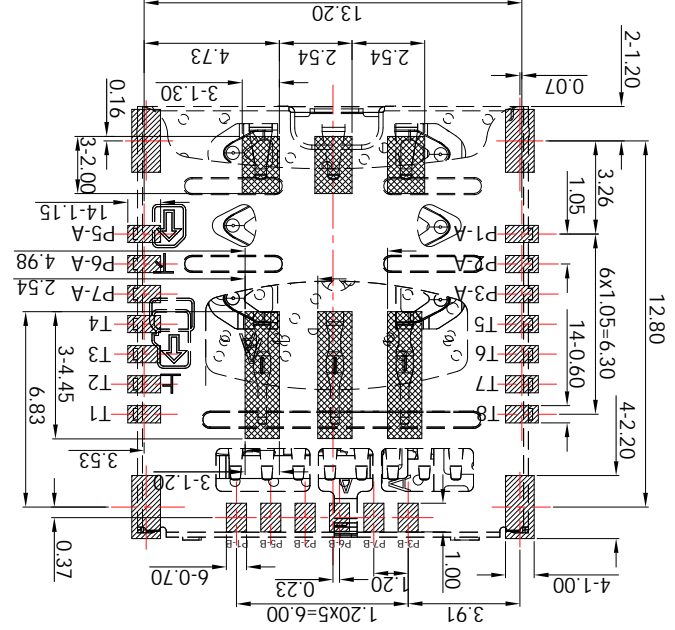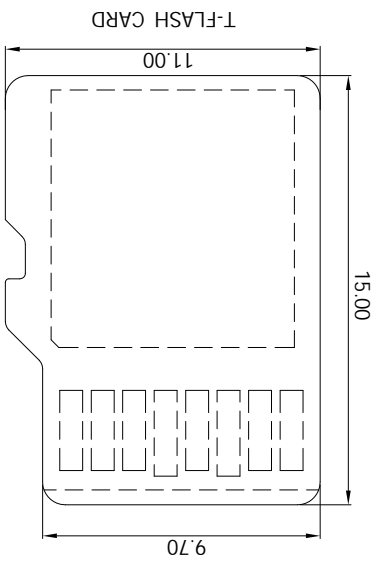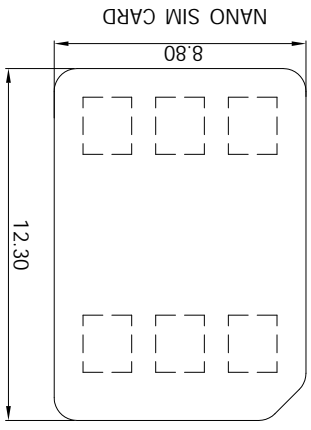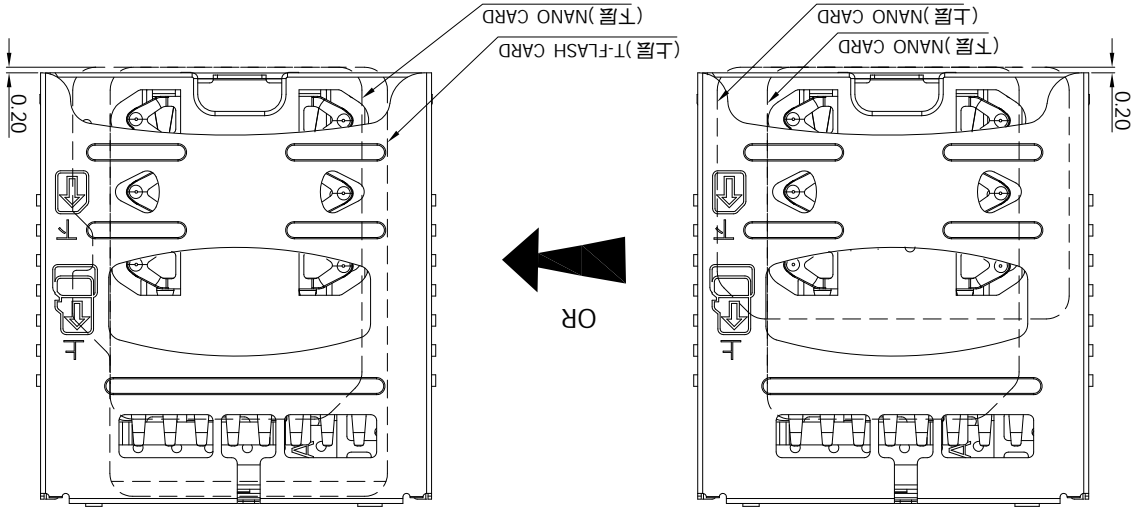

RECOMMENDED PCB LAYOUT(TOLERANCE ± 0.05)
RECOMMENDED METAL MASK T=0.12mm SCALE: 1:1
NO COLIOT AREA(PP VIEW)

| | | | |
|--|---------|-----------------------------------|-----------|
| MANUFACTURE DWG | | Dongguan Xunpu Electronics Co.Ltd | |
| TITLE : 2.5H 3 CHOOSE 2 双層卡座 (DUAL NANO OR NANO+T-CARD) FOR CUSTOMER | | | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | PAR MCS-304 | |
| DECIMALS: | ANGLES: | DWN KING | 2012.3.08 |
| X:±0.25 | X:±1° | CHKD | |
| X:±0.30 | X:±2° | APVD | |
| X:±0.20 | X:±1° | SCALE 1:1 | UNIT: mm |
| CUSTOMER COPY | | SIZE:A4 | SHEET:1/1 |
| REV:A | | | |

| | | | | |
|------|--------------|------|------|---------|
| MAPX | MODIFICATION | DATE | DRAW | APPROVE |
| | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Memory Card Connectors](#) category:

Click to view products by [XUNPU](#) manufacturer:

Other Similar products are found below :

[M10-597810-355](#) [M21-033321-005](#) [6426-201-21343](#) [69.920.0553.0](#) [MCR60A-98D-2.54DSA\(70\)](#) [FCN-568P068-G/07-4V](#) [809180410000000](#)
[95622-003LF](#) [AD2-262F-38900-232](#) [DM3AT-SF-PEJM5\(41\)](#) [EN2997S72039F6](#) [N7E50-7516PG-20-WF](#) [IC11S-BUR-PNEJL\(71\)](#) [NX30TA-](#)
[15PAA\(50\)](#) [21920-5](#) [2041353-2](#) [FUA006-3220-0](#) [308-DS1P0811-192](#) [33CFAE-DN](#) [MI21A-50PD-SF-EJR\(91\)](#) [502431-1011](#) [5175651-2](#) [10-](#)
[247926-166](#) [10-629549-258N](#) [11327-001](#) [11327-002](#) [EN2997S02039B8](#) [EN2997S61212BN](#) [EN2997S72039B6](#) [EN2997SE02039B8](#)
[EN2997SE61212BN](#) [EN2997SE72039B6](#) [603020000](#) [617230001](#) [71-252718-32P](#) [NX1-32T-KT3K\(05\)](#) [95622-003LF](#) [91-570124-15P](#)
[192900-0488](#) [N7E50-U516RB-50-SIN0005](#) [DM1AA-SF-PEJ](#) [95079-00CALF](#) [84648-056HLF](#) [68-580163-21S](#) [33DVIR-29S12R](#)
[SF58S006VBBR2000](#) [93-570123-08P](#) [GMC020080HR](#) [125A-78C00](#) [1010040575#](#)