


Technical requirements	
Characteristic impedance	50 Ω
Frequency range	6GHZ
Contact resistance	
Inner conductor	<5m Ω
Outer conductor	<2.5m Ω
Standing ratio	
Straight	<1.25/3GHz
Curved	<1.25/3GHz
Withstand voltage	500V/50Hz
Insulated resistance	>1000M Ω
Electrical resistance	>500 Ω
Appearance: no shift point burr scratch surface bright, no dirt, no deformation, etc	

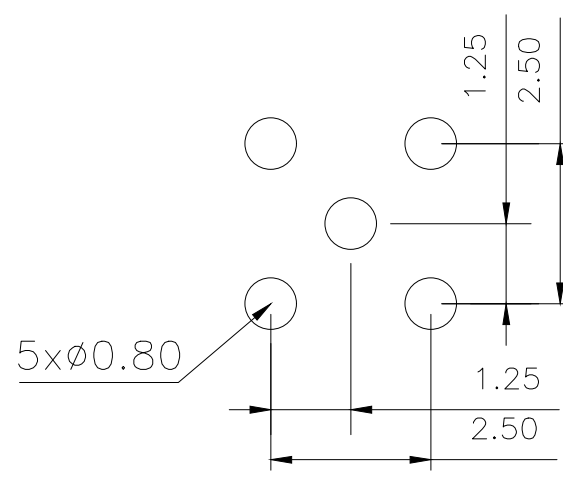

PCB.WELDING DRAWING (TOLERANCE:±0.05)

1	主体	1	黄铜	镀金
2	绝缘体	1	PTFE	
3	母针	1	黄铜	镀金
序号	名称	数量	材料	备注

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: 直插—母头—方3.6*H7.5	
DECIMALS:	ANGLES:	PAR	MMCX-KE-211-SQ3.6xH7.5
X.X±0.30	X.*±5°	DWN	
X.XX±0.20	X.X*±1°	CHKD	
X.XXX±0.10		APVD	
CUSTOMER COPY		SCALE N:A	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors](#) / [Coaxial Connectors](#) category:

Click to view products by [XUNPU](#) manufacturer:

Other Similar products are found below :

[89674-0827](#) [6059674-1](#) [630059-000](#) [6501-1071-002](#) [6769](#) [7002-1541-010](#) [7002-1572-002](#) [7004-1512-000](#) [7009-1511-004](#) [7101-1541-010](#)
[7101-1571-002](#) [7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-040](#) [7242-1511-000](#) [7405-1521-005](#) [7405-1521-](#)
[802](#) [804S01D04M040](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [PL11C-026](#) [PL40-36](#) [9408-1113-000](#)
[980-8666-005](#) [11 SMA-50-2-6 / 111 NE](#) [11 SMA-50-3-6 / 111 NE](#) [11 SMA-50-2-6/111 NH](#) [1-201144-1](#) [120919](#) [R107003010W](#) [R112186000](#)
[R113053000W](#) [R113082097](#) [R113236000](#) [R114083000](#) [R114670000W](#) [R123415000W](#) [R124072220W](#) [R124076320](#) [R124076450](#)
[R124175123](#) [R124176123W](#) [R125075000W](#)