
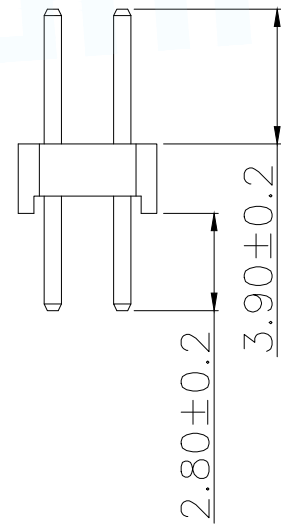


SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulation Resistance: 1000M Ω Min
 Contact Resistance: 20m Ω Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40° to +105°
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Gold Flash
 Max. Processing Temp: 240°C for 30-60 seconds (260°C for 5 seconds)


| P/N | PIN | DIM.A | DIM.B |
|----------------|-------|-------------|-----------|
| PH2.0-01-01PZS | 1 | 0.00 | 2.00 |
| PH2.0-01-02PZS | 2 | 2.00 | 4.00 |
| PH2.0-01-03PZS | 3 | 4.00 | 6.00 |
| PH2.0-01-04PZS | 4 | 6.00 | 8.00 |
| PH2.0-01-05PZS | 5 | 8.00 | 10.00 |
| PH2.0-01-06PZS | 6 | 10.00 | 12.00 |
| PH2.0-01-07PZS | 7 | 12.00 | 14.00 |
| PH2.0-01-08PZS | 8 | 14.00 | 16.00 |
| PH2.0-01-09PZS | 9 | 16.00 | 18.00 |
| | | | |
| PH2.0-01-40PZS | 40 | (PIN-1)x2.0 | (PIN)x2.0 |

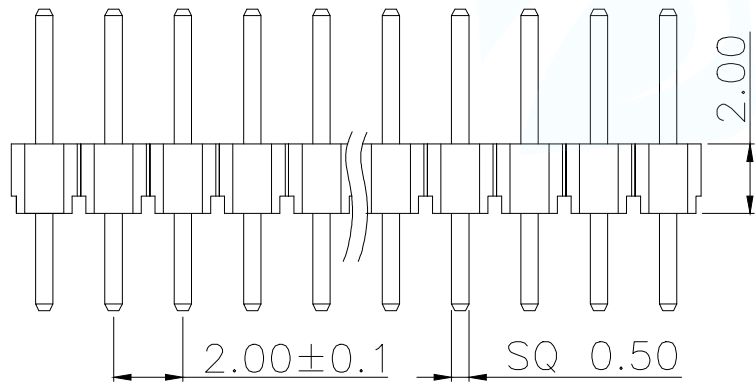

PART NUMBER DESCRIPTION:

PH2.0-01-NPZS

- (D=单排; S=双排)
- (Z=直脚; W=弯脚)
- (PIN数量; 01.....40PIN)
- (排针开关)

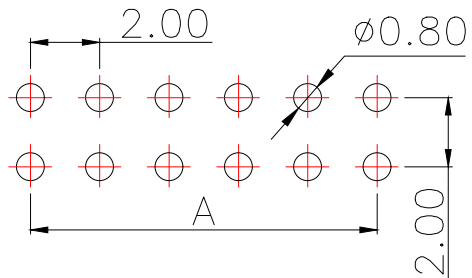

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

| | | | | |
|---------------------------------------|------------|---|---|--|
| MANUFACTURE DWG | | 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd | | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | | TITLE: 2.0PH H2.0 2xnPin 180度 PC2.8 PA3.9 PB2.0 L8.7 6T | |
| DECIMALS: | ANGLES: | | PAR PH2.0-01-NPZS | |
| X.±0.30 | X°±5° | | DWN | |
| X.X±0.25 | X.X°±1° | | CHKD | |
| X.XX±0.20 | X.XX°±0.5° | APVD | | |
| CUSTOMER COPY | | SCALE N:A | UNIT:MM | |
| | | SIZE:A4 | SHEET:1F1 | |
| | | | REV:A | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XUNPU](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)