
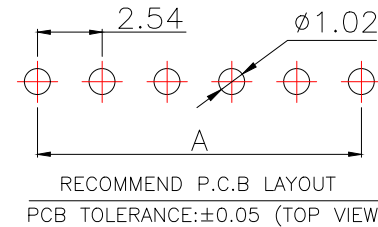

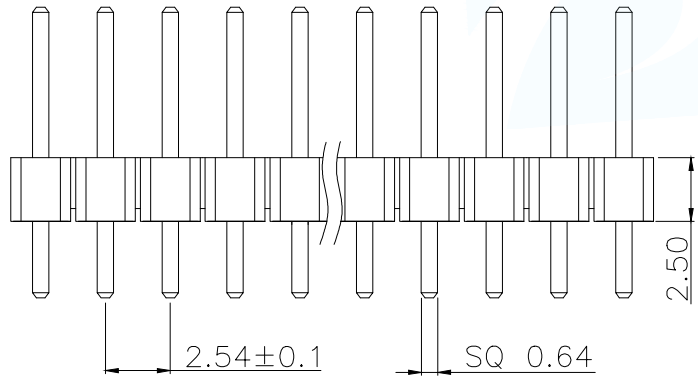


### SPECIFICATIONS

Current Rating: 3Amps  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 20mΩ Max  
 Withstanding Voltage: AC 1000V  
 Operation Temperature: -40° to +105°  
 Contact Material: Brass  
 Standard: PA6T  
 Insulator Material: Polyester(UL 94V-0)  
 Contact Plating: Gold Flash  
 Max.Processing Temp: 240°C for 30-60seconds  
 (260°C for 5seconds)

| P/N             | PIN   | DIM.A        | DIM.B      |
|-----------------|-------|--------------|------------|
| PH2.54-01-01PZD | 1     | 0.00         | 2.54       |
| PH2.54-01-02PZD | 2     | 2.54         | 5.08       |
| PH2.54-01-03PZD | 3     | 5.08         | 7.62       |
| PH2.54-01-04PZD | 4     | 7.62         | 10.16      |
| PH2.54-01-05PZD | 5     | 10.16        | 12.70      |
| PH2.54-01-06PZD | 6     | 12.70        | 15.24      |
| PH2.54-01-07PZD | 7     | 15.24        | 17.78      |
| PH2.54-01-08PZD | 8     | 17.78        | 20.32      |
| PH2.54-01-09PZD | 9     | 20.32        | 22.86      |
| .....           | ..... | .....        | .....      |
| PH2.54-01-40PZD | 40    | (PIN-1)X2.54 | (PIN)X2.54 |

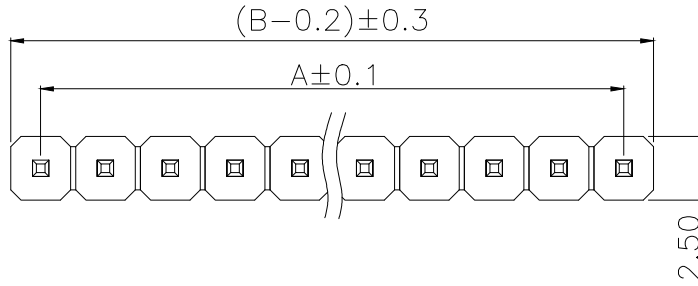

PART NUMBER DESCRIPTION:

PH2.54-01-NPZD

- └ (D=单排; S=双排)
- └ (Z=直脚; W=弯脚)
- └ (PIN数量; 01.....40PIN)
- └ (排针开关)

|                                       |            |   |  |  |
|---------------------------------------|------------|---|--|--|
| MANUFACTURE DWG                       |            | 东莞市讯普电子科技有限公司<br>DongGuan XunPu Electronics Co.,Ltd |  |  |
| UNLESS OTHERWISE SPECIFIED TOLERANCES |            |   | TITLE: 2.54PH H2.5 1xNPin 180度<br>PC3.0 PA6.0 PB2.5 L11.5 6T |  |
| DECIMALS:                             | ANGLES:    |   | PAR PH2.54-01-NPZD   |  |
| X.±0.30                               | X°±5°      |   | DWN  |  |
| X.X±0.20                              | X.X°±1°    |   | CHKD   |  |
| X.XX±0.10                             | X.XX°±0.5° | APVD  |  |  |
| CUSTOMER COPY                         |            | SCALE N:A   | UNIT:MM  |  |
|                                       |            | SIZE:A4   | SHEET:1F1  |  |
|                                       |            |   | REV:A  |  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XUNPU](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)