

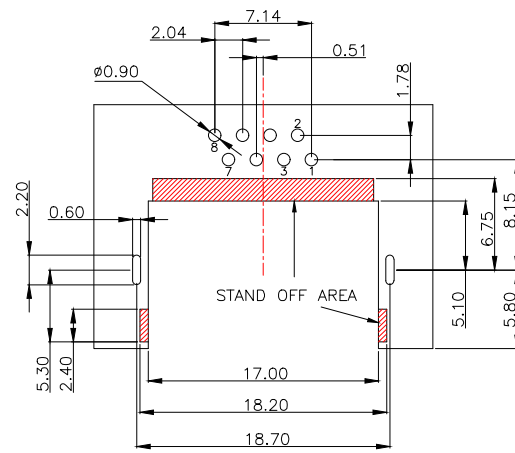


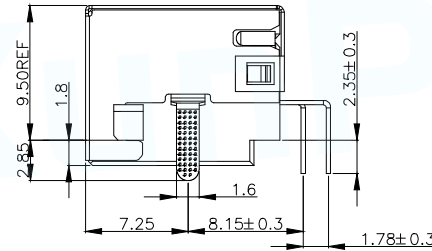



NOTES:

- HOUSING MATERIAL:LCP UL94V-0.
  - CONTACT MATERIAL:COPPER ALLOY,T=0.30.
  - PLATING: GOLD PLATED ON CONTACT AREA, 100u"MIN. TIN PLATED ON SOLDERING AREA, 50u"MIN. NICKEL PLATED OVERALL.
  - SHELL:COPPER ALLOY,T=0.20. 40u"MIN. NICKEL PLATED OVERALL.
- ELECTRICAL:
- VOLTAGE RATING: 125V AC RMS.
  - CURRENT RAIING: 1.5AMP.
  - CONTACT RESISTANCE: 40MILLIOHMS MAX.
  - INSULATION RESISTANCE: 500MEGOHMS MIN @100V DC.
- MECHANICAL:
- DURRABILITY: 750 CYCLES MIN.
  - INSERTION FORCE : 22N MAX.
  - REMOVAL FORCE(WITHOUT PLUG LOCK) : 22N MAX.
- ENVIRONMENTAL:
- STORAGE: -40°C~85°C
  - OPERATION:-40°C~85°C
- \*Apply to the EU standards(ROSH)
1.  $\varnothing 1$ ~ $\varnothing 6$  FOR QIP DIM.



PCBLAYOUT TOP VIEW  
TOL:±0.05(THICKNESS=1.60)



|                                       |          |   |           |
|---------------------------------------|----------|---|-----------|
| MANUFACTURE DWG                       |          |  东莞市讯普电子科技有限公司<br>DongGuan XunPu Electronics Co.,Ltd |           |
| UNLESS OTHERWISE SPECIFIED TOLERANCES |          | TITLE:<br>RJ45 派派1.8有壳DIP   |           |
| DECIMALS:                             |          | PAR<br>RJ45-001-002-11  |           |
| ANGLES:                               |          | DWN   |           |
| X.X±0.35                              | X.*±3°   | CHKD  |           |
| X.XX=0.25                             | X.X*±2°  | APVD  |           |
| X.XXX=0.10                            | X.XX*±1° | SCALE:1:1   | UNIT:MM   |
| CUSTOMER COPY                         |          | SIZE:A4   | SHEET:1F1 |
|                                       |          |   | REV:A     |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:*

*Click to view products by [XUNPU](#) manufacturer:*

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GDCX-PN-66](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#)  
[GMX-SMT4-N-88](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS-88-3.68](#) [PT-108A-8C-UL](#) [PTS-J531-8CS-50UL](#) [A-2014-0-4](#)  
[GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [132764-001](#) [1413235](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [155302-001](#)  
[AX101050](#) [AX101063](#) [AX101065](#) [AX101072](#) [AX101307](#) [AX101315](#) [AX101318](#) [AX102271](#) [AX102277](#) [AX102651](#) [AX102660](#) [AX104024](#)  
[203475](#) [J0026D01ENL](#) [PC4D0018P](#) [KIT38082NI](#) [8949-B88/6](#) [2-6609208-5](#) [30-8956](#) [30-8964-100](#) [SM85](#) [17-103540](#) [191587](#) [PDI-68-RV](#)  
[PHP-8P8C-S-5](#)