


A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

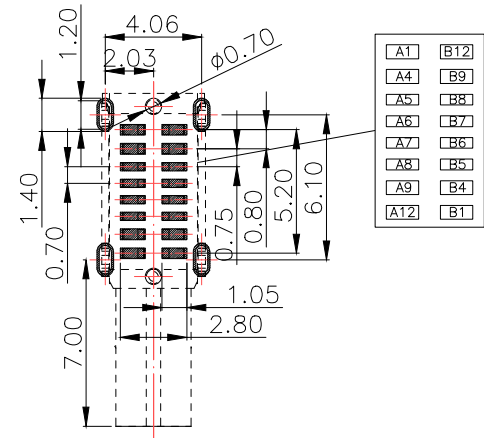

特性:

一、电气性能:EICTRICAL

1. 额定电流:5.0A
2. 接触阻抗:40 MILLIOHMS MAX
3. 耐电压:100V AC / 1 mA MAX
4. 绝缘阻抗:150V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力:5~20N;拔出力:8~20N
2. 使用寿命:10000次

三、材料:MATERIAL

1. 塑胶:LCP黑色 UL94V-0
2. 端子:C7025 TM03 T=0.15 mm
3. 外壳:SUS304 $\frac{1}{2}$ H T=0.30mm
4. 卡勾:SUS304 $\frac{3}{4}$ H T=0.15mm

四、电镀:FINISH

1. 端子:接触点镀金1u"MIN
PIN脚焊接区域镀金G/F
2. 外壳:电镀80u"MIN

五、电镀品需做粘锡测试:粘锡面积达到95%以上。


六、SMT回流焊(峰值 $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$)不能起泡, 膨胀, 变色不良(变形在公差范围以内)

七、工作温度: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$





八、盐雾测试:通过48H在浓度为 $5 \pm 1\%$ 盐水的盐雾测试无生锈现象

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:USB TYPE CF 16PIN 侧插SMT CH=7.2
DECIMALS:	ANGLES:		PAR TYPEC-305-ACP16
X.: ± 0.30	X':: $\pm 4^{\circ}$		DWN KING 2018.09.07
X.X: ± 0.20	.X':: $\pm 3^{\circ}$		CHKD APVD
X.XX: ± 0.10		CUSTOMER COPY	SCALE:1:1 UNIT:MM
			SIZE:A4 SHEET:1F1 REV:A

12	13	14	15
MAPX	MODIFICATION	DATE	DRAW
			APPROVE

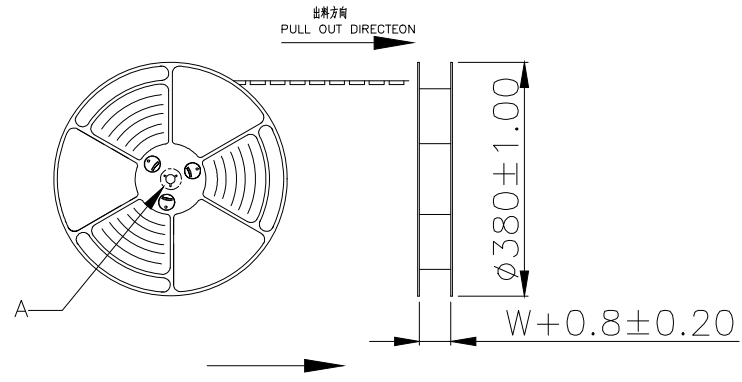



at small positioning hole of the carrier tape side.
标签黏贴处 (朝卷装包材的小定位孔一侧)
Location of label sticking (label)

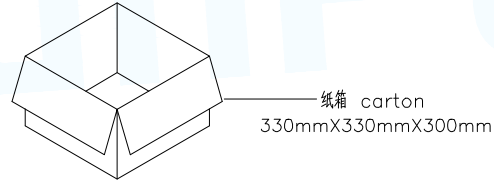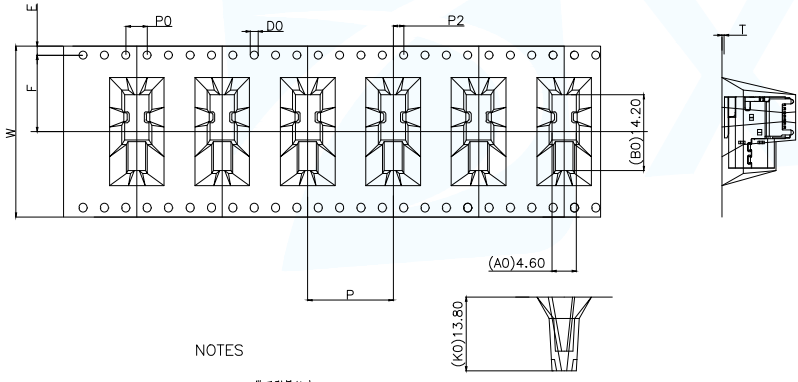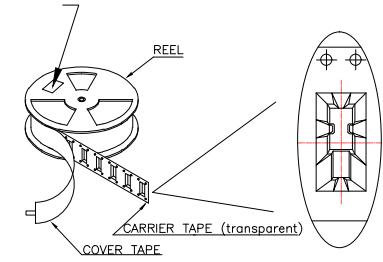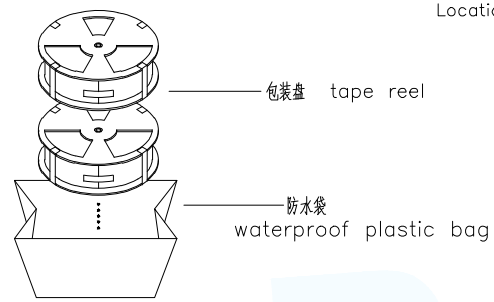

NOTE:
1.每卷包装数量及每箱装箱数量如左下表格。
Packing q'ty of each reel & carton as below table shown.
2.将装满产品的卷盘放入纸箱并以胶带封口
Put reels in the carton and use adhesive tape to seal up.

NOTES

- 1.带子引导长度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON
- 2.上带 剥力为:0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出料运输过程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
卷带在运输过程中不能撬开
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION



W	32±0.3
F	14.2±0.1
SO	±0.1
T	0.50±0.1
E	1.75±0.1
P	16.0±0.1
PO	4±0.1
P2	2±0.15
AO	4.60±0.1
BO	14.2±0.1
KO	13.8±0.1
DO	1.50±0.1

卷带	规格: $\phi 330\text{mm}$	包装数量: 400PCS
纸箱	规格: 330mmX330mmX300mm	包装数量: 8盘/3200PCS

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:USB TYPE CF 16PIN 侧插SMT CH=7.2
DECIMALS:	ANGLES:		PAR TYPEC-305-ACP16
.X:±0.30	X'.:±4'		DWN KING 2018.09.07
.XX:±0.20	.X':±3'		CHKD APVD
.XXX:±0.10		CUSTOMER COPY	SCALE:1:1 UNIT:MM
			SIZE:A4 SHEET:1F1
			REV:A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [XUNPU](#) manufacturer:

Other Similar products are found below :

[950](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#)
[1734082-1](#) [30-470](#) [30-489](#) [30-541](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [USBFTVSCCG](#) [1-1734084-2](#) [10135326-001LF](#) [4198](#) [USB-A-D-VT](#)
[USB-A-S-RA-TSMT](#) [1310-1023-02](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#) [17-200011](#) [UB-20AFMM-LL7A01](#) [1040870124](#) [CAP-](#)
[WCCMLPB1](#) [CAP-WCCMLPC1](#) [2274475-3](#) [UB-20BMFA-SL8001](#) [914-614A2025S10200](#) [USB3FTV7SAGF059](#) [ZX40-B-5S-1500-](#)
[STDA\(30\)](#) [GSB3116344HR](#) [USB3FTV2SAZNF459](#) [USB3FTV7SAZNF459](#) [U221-041N-1WVS62-F5D](#) [HYCW153-USBD05-500B](#)
[HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#)
[HYCW213-USBA04-113B](#) [UB-20AMFM-SL7A01](#) [KMMX-BSMT35S-1-B30TR](#) [2345986-1](#)