

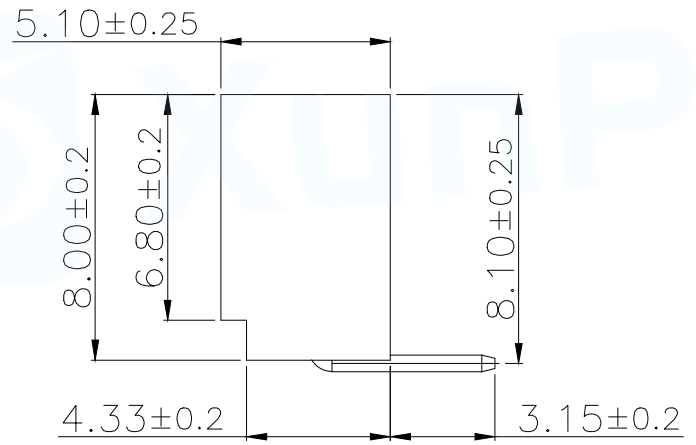



Technical Index:  
 1. Temperature range:  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ .  
 2. Rated voltage: 200V DC/AC(rms).  
 3. Rated current: 2.0A.  
 4. Contact resistance:  $\leq 25\text{m}\Omega$ .  
 5. Withstanding voltage: 500V AC/minute.  
 6. Insulation resistance:  $\geq 1000\text{M}\Omega$ .

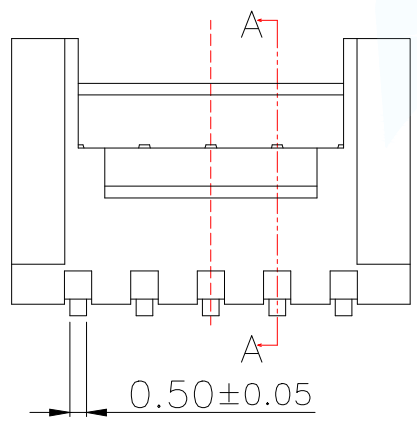

| Part No               | Pin | A     | B     |
|-----------------------|-----|-------|-------|
| WAFER-HY2.0-2PWZ-R62  | 2   | 2.00  | 6.00  |
| WAFER-HY2.0-3PWZ-R62  | 3   | 4.00  | 8.00  |
| WAFER-HY2.0-4PWZ-R62  | 4   | 6.00  | 10.00 |
| WAFER-HY2.0-5PWZ-R62  | 5   | 8.00  | 12.00 |
| WAFER-HY2.0-6PWZ-R62  | 6   | 10.00 | 14.00 |
| WAFER-HY2.0-7PWZ-R62  | 7   | 12.00 | 16.00 |
| WAFER-HY2.0-8PWZ-R62  | 8   | 14.00 | 18.00 |
| WAFER-HY2.0-9PWZ-R62  | 9   | 16.00 | 20.00 |
| WAFER-HY2.0-10PWZ-R62 | 10  | 18.00 | 22.00 |
| WAFER-HY2.0-11PWZ-R62 | 11  | 20.00 | 24.00 |
| WAFER-HY2.0-12PWZ-R62 | 12  | 22.00 | 26.00 |
| WAFER-HY2.0-13PWZ-R62 | 13  | 24.00 | 28.00 |
| WAFER-HY2.0-14PWZ-R62 | 14  | 26.00 | 30.00 |
| WAFER-HY2.0-15PWZ-R62 | 15  | 28.00 | 32.00 |
| WAFER-HY2.0-16PWZ-R62 | 16  | 30.00 | 34.00 |
| WAFER-HY2.0-17PWZ-R62 | 17  | 32.00 | 36.00 |
| WAFER-HY2.0-18PWZ-R62 | 18  | 34.00 | 38.00 |
| WAFER-HY2.0-19PWZ-R62 | 19  | 36.00 | 40.00 |
| WAFER-HY2.0-20PWZ-R62 | 20  | 38.00 | 42.00 |

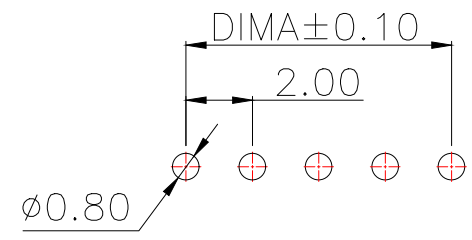

| 序号 | 品名          | 材质                           |
|----|-------------|------------------------------|
| 1  | HY2.0 弯针 胶芯 | PA66 UL94V-2 Red             |
| 2  | HY2.0 弯针 端子 | Copper Alloy/<br>Tin Plating |

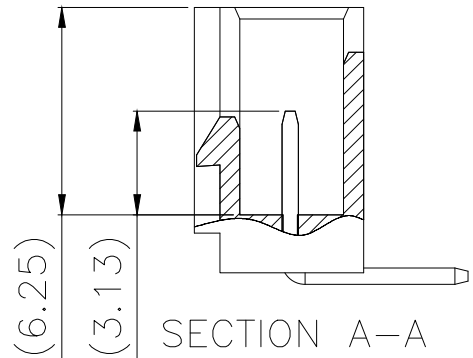

适用线路板(PCB LAYOUT)

|                                       |            |   |                             |
|---------------------------------------|------------|---|-----------------------------|
| MANUFACTURE DWG                       |            | 东莞市讯普电子科技有限公司<br>DongGuan XunPu Electronics Co.,Ltd |                             |
| UNLESS OTHERWISE SPECIFIED TOLERANCES |            |   | TITLE:<br>HY2.0 弯针带扣        |
| DECIMALS:                             | ANGLES:    |   | PAR<br>WAFER-HY2.0-NPWZ-R62 |
| X.:±0.50                              | X'::±5°    |   | DWN                         |
| .X:±0.20                              | X.X'::±3°  |   | CHKD                        |
| .XX:±0.10                             | X.XX'::±1° | APVD  | SCALE:1:1 UNIT:MM           |
| CUSTOMER COPY                         |            | SIZE:A4   | SHEET:1F1 REV:A             |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XUNPU](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)  
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)  
[821-22-002-10-001101](#) [821-22-003-10-002101](#)