


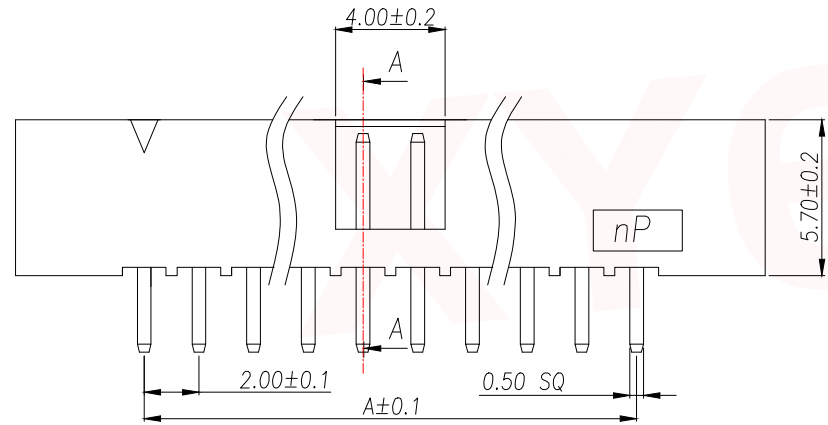


| | | | | |
|------|------|----------|------|------|
| REV. | Q'TY | ECN. NO. | APR. | DATE |
| | | | | |

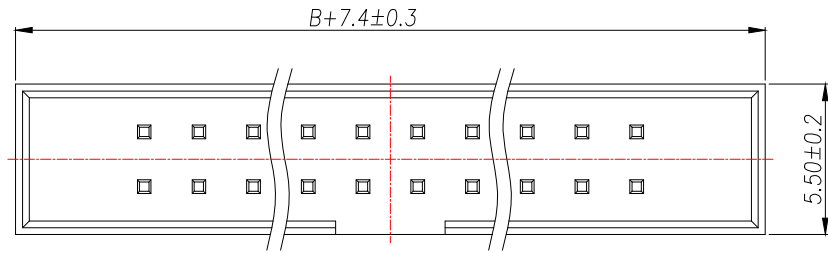

A-A

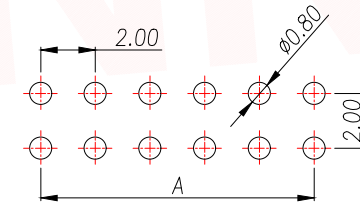

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulation Resistance: 1000MΩ, Min
 Contact Resistance: 20mΩ, Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40°to+105°
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester(UL 94V-0)
 Contact Plating: Gold Flash
 Max.Processing Temp: 240°C for 30-60seconds
 (260°C for 5seconds)

| Part No | Pin | A | B | Part No | Pin | A | B | Part No | Pin | A | B | Part No | Pin | A | B |
|-----------------|-----|-------|-------|-----------------|-----|-------|-------|-----------------|-----|-------|-------|-----------------|-----|-------|-------|
| IDC2.0-UD2S-3A | 3 | 4.00 | 6.00 | IDC2.0-UD2S-12A | 12 | 22.00 | 24.00 | IDC2.0-UD2S-21A | 21 | 40.00 | 42.00 | IDC2.0-UD2S-30A | 30 | 58.00 | 60.00 |
| IDC2.0-UD2S-4A | 4 | 6.00 | 8.00 | IDC2.0-UD2S-13A | 13 | 24.00 | 26.00 | IDC2.0-UD2S-22A | 22 | 42.00 | 44.00 | IDC2.0-UD2S-31A | 31 | 60.00 | 62.00 |
| IDC2.0-UD2S-5A | 5 | 8.00 | 10.00 | IDC2.0-UD2S-14A | 14 | 26.00 | 28.00 | IDC2.0-UD2S-23A | 23 | 44.00 | 46.00 | IDC2.0-UD2S-32A | 32 | 62.00 | 64.00 |
| IDC2.0-UD2S-6A | 6 | 10.00 | 12.00 | IDC2.0-UD2S-15A | 15 | 28.00 | 30.00 | IDC2.0-UD2S-24A | 24 | 46.00 | 48.00 | IDC2.0-UD2S-33A | 33 | 64.00 | 66.00 |
| IDC2.0-UD2S-7A | 7 | 12.00 | 14.00 | IDC2.0-UD2S-16A | 16 | 30.00 | 32.00 | IDC2.0-UD2S-25A | 25 | 48.00 | 50.00 | IDC2.0-UD2S-34A | 34 | 66.00 | 68.00 |
| IDC2.0-UD2S-8A | 8 | 14.00 | 16.00 | IDC2.0-UD2S-17A | 17 | 32.00 | 34.00 | IDC2.0-UD2S-26A | 26 | 50.00 | 52.00 | IDC2.0-UD2S-35A | 35 | 68.00 | 70.00 |
| IDC2.0-UD2S-9A | 9 | 16.00 | 18.00 | IDC2.0-UD2S-18A | 18 | 34.00 | 36.00 | IDC2.0-UD2S-27A | 27 | 52.00 | 54.00 | | | | |
| IDC2.0-UD2S-10A | 10 | 18.00 | 20.00 | IDC2.0-UD2S-19A | 19 | 36.00 | 38.00 | IDC2.0-UD2S-28A | 28 | 54.00 | 56.00 | | | | |
| IDC2.0-UD2S-11A | 11 | 20.00 | 22.00 | IDC2.0-UD2S-20A | 20 | 38.00 | 40.00 | IDC2.0-UD2S-29A | 29 | 56.00 | 58.00 | | | | |

| DIMENSION IN mm | | 厦门市辛译精密电子有限公司 Xiamen XinYi Xyconn Electronics Co.,Ltd | | | |
|--------------------------------------|----------|--|------|--|-----|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | APR. | Alex | TITLE: 2.0IDC-nPin H5.7 180° PC2.8 L8.0 6T | |
| .X±0.35 | .X*± 5° | CHK. | Jack | DWG NO. IDC2.0-UP1S-NA | |
| .XX±0.25 | .X*± 3° | DRA. | Can | PROJ. CUSTOMER DRAWING | |
| .XXX±0.15 | .XX*± 1° | SIZE | A4 | SCALE | 1:1 |
| | | SHEET | 1/1 | REV. | A |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XYECONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)
[821-22-002-10-001101](#) [821-22-003-10-002101](#)