

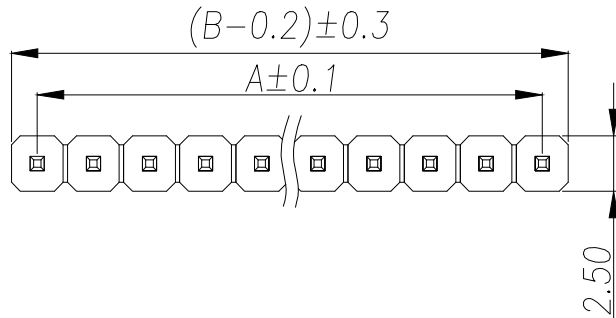


| | | | | |
|------|------|----------|------|------|
| REV. | Q'TY | ECN. NO. | APR. | DATE |
| | | | | |

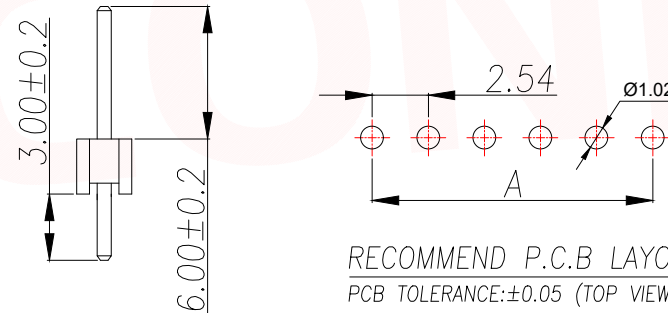

SPECIFICATIONS

Current Rating: 3Amps
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: AC 1000V
 Operation Temperature: -40° to +105°
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Gold Flash
 Max. Processing Temp: 240°C for 30-60 seconds
 (260°C for 5 seconds)

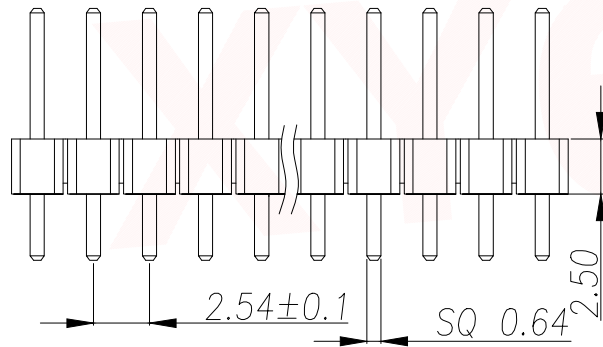

| Part No | Pin | A | B | Part No | Pin | A | B | Part No | Pin | A | B | Part No | Pin | A | B |
|-----------------|-----|-------|-------|-----------------|-----|-------|-------|-----------------|-----|-------|-------|-----------------|-----|-------|--------|
| PZ2.54-UP1D-1A | 1 | 0.00 | 2.54 | PZ2.54-UP1D-11A | 11 | 25.40 | 27.94 | PZ2.54-UP1D-21A | 21 | 50.80 | 53.34 | PZ2.54-UP1D-31A | 31 | 76.20 | 78.74 |
| PZ2.54-UP1D-2A | 2 | 2.54 | 5.08 | PZ2.54-UP1D-12A | 12 | 27.94 | 30.48 | PZ2.54-UP1D-22A | 22 | 53.34 | 55.88 | PZ2.54-UP1D-32A | 32 | 78.74 | 81.28 |
| PZ2.54-UP1D-3A | 3 | 5.08 | 7.62 | PZ2.54-UP1D-13A | 13 | 30.48 | 33.02 | PZ2.54-UP1D-23A | 23 | 55.88 | 58.42 | PZ2.54-UP1D-33A | 33 | 81.28 | 83.82 |
| PZ2.54-UP1D-4A | 4 | 7.62 | 10.16 | PZ2.54-UP1D-14A | 14 | 33.02 | 35.56 | PZ2.54-UP1D-24A | 24 | 58.42 | 60.96 | PZ2.54-UP1D-34A | 34 | 83.82 | 86.36 |
| PZ2.54-UP1D-5A | 5 | 10.16 | 12.70 | PZ2.54-UP1D-15A | 15 | 35.56 | 38.10 | PZ2.54-UP1D-25A | 25 | 60.96 | 63.50 | PZ2.54-UP1D-35A | 35 | 86.36 | 88.90 |
| PZ2.54-UP1D-6A | 6 | 12.70 | 15.24 | PZ2.54-UP1D-16A | 16 | 38.10 | 40.64 | PZ2.54-UP1D-26A | 26 | 63.50 | 66.04 | PZ2.54-UP1D-36A | 36 | 88.90 | 91.44 |
| PZ2.54-UP1D-7A | 7 | 15.24 | 17.78 | PZ2.54-UP1D-17A | 17 | 40.64 | 43.18 | PZ2.54-UP1D-27A | 27 | 66.04 | 68.58 | PZ2.54-UP1D-37A | 37 | 91.44 | 93.95 |
| PZ2.54-UP1D-8A | 8 | 17.78 | 20.32 | PZ2.54-UP1D-18A | 18 | 43.18 | 45.72 | PZ2.54-UP1D-28A | 28 | 68.58 | 71.12 | PZ2.54-UP1D-38A | 38 | 93.95 | 96.52 |
| PZ2.54-UP1D-9A | 9 | 20.32 | 22.86 | PZ2.54-UP1D-19A | 19 | 45.72 | 48.26 | PZ2.54-UP1D-29A | 29 | 71.12 | 73.66 | PZ2.54-UP1D-39A | 39 | 96.52 | 99.06 |
| PZ2.54-UP1D-10A | 10 | 25.40 | 25.40 | PZ2.54-UP1D-20A | 20 | 48.26 | 50.80 | PZ2.54-UP1D-30A | 30 | 73.66 | 76.20 | PZ2.54-UP1D-40A | 40 | 99.06 | 101.60 |

| | | | | |
|--------------------------------------|---------|----------------------------------------------------------|------|--------------------------------------------------------------|
| DIMENSION IN mm | | 厦门市辛译精密电子有限公司 Xiamen XinYi Xyecom Electronics Co.,Ltd | | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | | | |
| .X±0.35 | X.*±5° | APR. | Alex | TITLE: 2.54PZ H2.5 1xnPin 180° PC3.0 PA6.0 PB2.5 L11.5 6T |
| .XX±0.25 | .X*±3° | CHK. | Jack | DWG NO. PZ2.54-UP1D-NA |
| .XXX±0.15 | .XX*±1° | DRA. | Can | PROJ. CUSTOMER DRAWING |
| | | SIZE | A4 | SCALE 1:1 |
| | | SHEET | 1/1 | REV. A |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XYECONN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)