
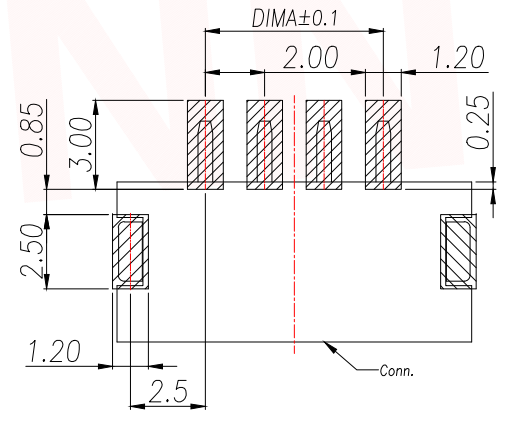
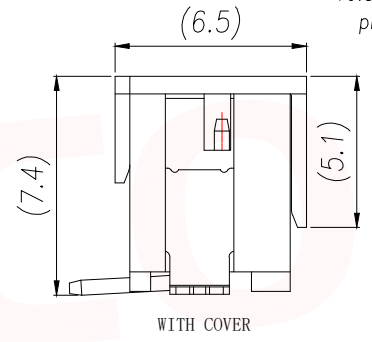
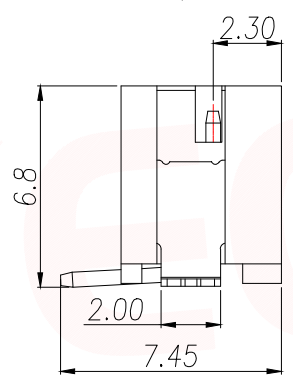
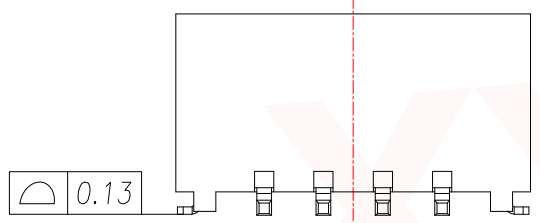


REV.	Q'TY	ECN. NO.	APR.	DATE

PRELIMINARY  
DESIGN IS SUBJECT  
TO CHANGE WITHOUT  
PRIOR NOTICE

NOTES:

1. Working temp: -25°C~85°C.
2. Voltage rating: 100V AV/DC(rms)
3. Contact resistance: 20mΩ max.
4. Insulation resistance: 1000MΩ min.
5. Current rating: 2A AV/DC
6. Withstanding Voltage: 800V AC/minute
7. Pin Retention Force: 15N min.
8. Housing material: LCP UL94-V0, Natural
9. Terminal materl: Brass,  
plating Ni 50u" min , plating Tin 100u"min.
10. Solder tab material: Brass,  
plating Ni 50u" min , plating Tin 100u"min.

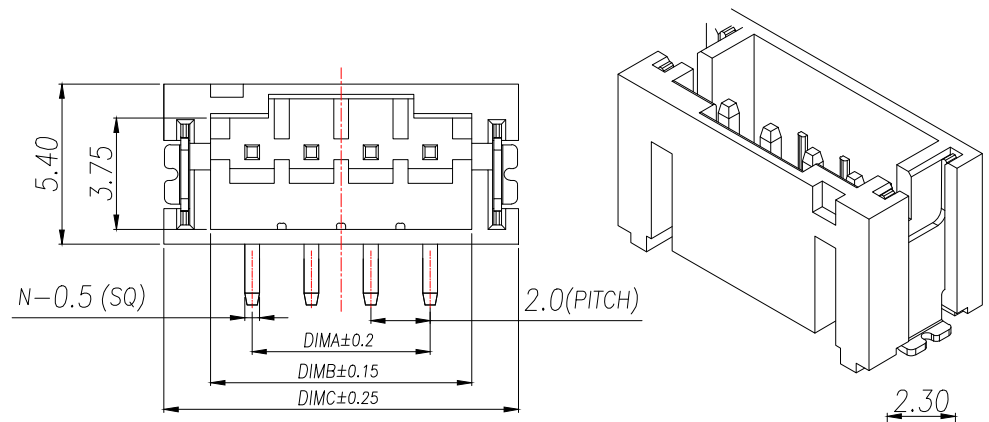

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)






▨ SMT SOLDER AREA

PIN	NO.	Dim A	Dim B	Dim C
2	XY-PH2.0-2A51	2.00	4.80	7.95
3	XY-PH2.0-3A51	4.00	6.80	9.95
4	XY-PH2.0-4A51	6.00	8.80	11.95
5	XY-PH2.0-5A51	8.00	10.80	13.95
6	XY-PH2.0-6A51	10.00	12.80	15.95
7	XY-PH2.0-7A51	12.00	14.80	17.95
8	XY-PH2.0-8A51	14.00	16.80	19.95
9	XY-PH2.0-9A51	16.00	18.80	21.95
10	XY-PH2.0-10A51	18.00	20.80	23.95
11	XY-PH2.0-11A51	20.00	22.80	25.95
12	XY-PH2.0-12A51	22.00	24.80	27.95
13	XY-PH2.0-13A51	24.00	26.80	29.95
14	XY-PH2.0-14A51	26.00	28.80	31.95
15	XY-PH2.0-15A51	28.00	30.80	33.95
16	XY-PH2.0-16A51	30.00	32.80	35.95

DIMENSION IN mm		厦门市辛译精密电子有限公司 Xiamen XinYi Xyconn Electronics Co.,Ltd	
TOLERANCE UNLESS OTHERWISE SPECIFIED		APR. Alex	TITLE: WAFER 2.00mm H6.8mm 180°SMT
.X±0.35	.X*± 5°	CHK. Jack	DWG NO. XY-PH2.0-NA51
.XX±0.25	.X*± 3°	DRA. Can	PROJ.  CUSTOMER DRAWING
.XXX±0.15	.XX*± 1°	SIZE A4	SCALE 1:1 SHEET 1/3 REV. A

REV.	Q'TY	ECN. NO.	APR.	DATE

PRELIMINARY  
DESIGN IS SUBJECT  
TO CHANGE WITHOUT  
PRIOR NOTICE

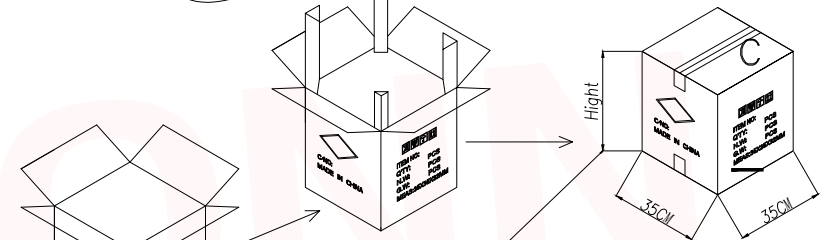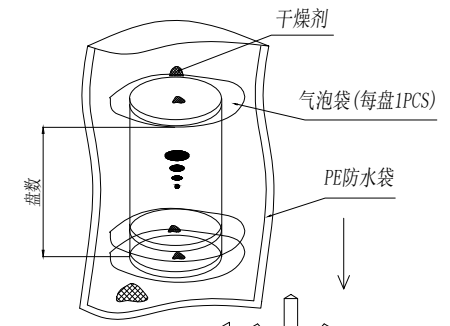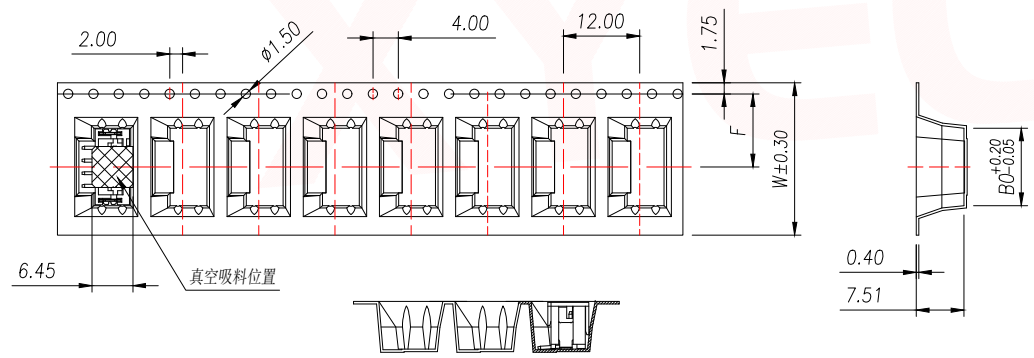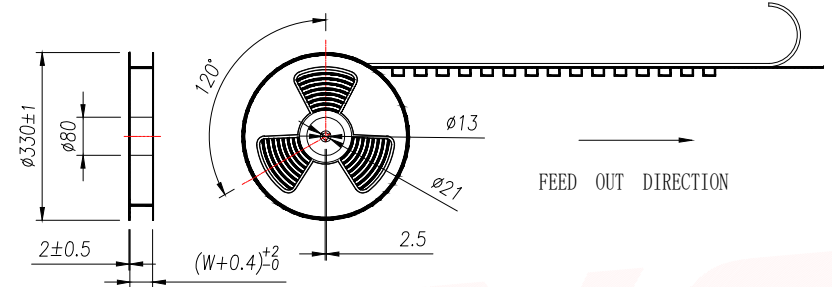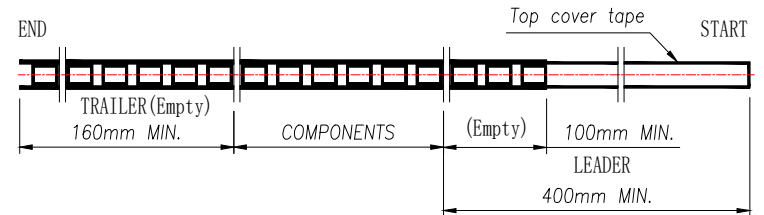


Carton Type	Small Siz	Medium	Standard
Height(CM)	7.5	15	32

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2mm.
  - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
  - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
  - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
  - 5.THICKNESS: 0.40±0.05mm.
  - 6.PACKING LENGTH PER REEL: 8.8 METERS.
  - 7.COMPONENT LOAD PER REEL: 700 PCS.




PIN	NO.	Dim BO	Dim W	Dim F	PCS/RELL	RELL/CARTON	PCS/CARTON
2	XY-PH2.0-2A51	8.20	16	7.5	700	14	9800
3	XY-PH2.0-3A51	10.20	24	11.50		10	7000
4	XY-PH2.0-4A51	12.20					
5	XY-PH2.0-5A51	14.20					

DIMENSION IN mm		厦门市辛译精密电子有限公司 Xiamen XinYi Xyconn Electronics Co.,Ltd	
TOLERANCE UNLESS OTHERWISE SPECIFIED			
.X±0.35	X.*±5°	APR. Alex	TITLE: WAFER 2.00mm H6.8mm 180°SMT
.XX±0.25	.X.*±3°	CHK. Jack	DWG NO. XY-PH2.0-NA51
.XXX±0.15	.XX.*±1°	DRA. Can	PROJ.  CUSTOMER DRAWING
		SIZE A4	SCALE 1:1
		SHEET 2/3	REV. A

REV.	Q'TY	ECN. NO.	APR.	DATE

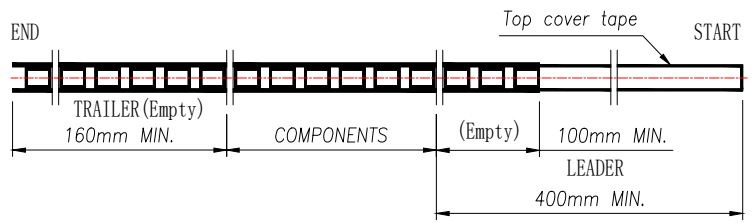

PRELIMINARY DESIGN IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

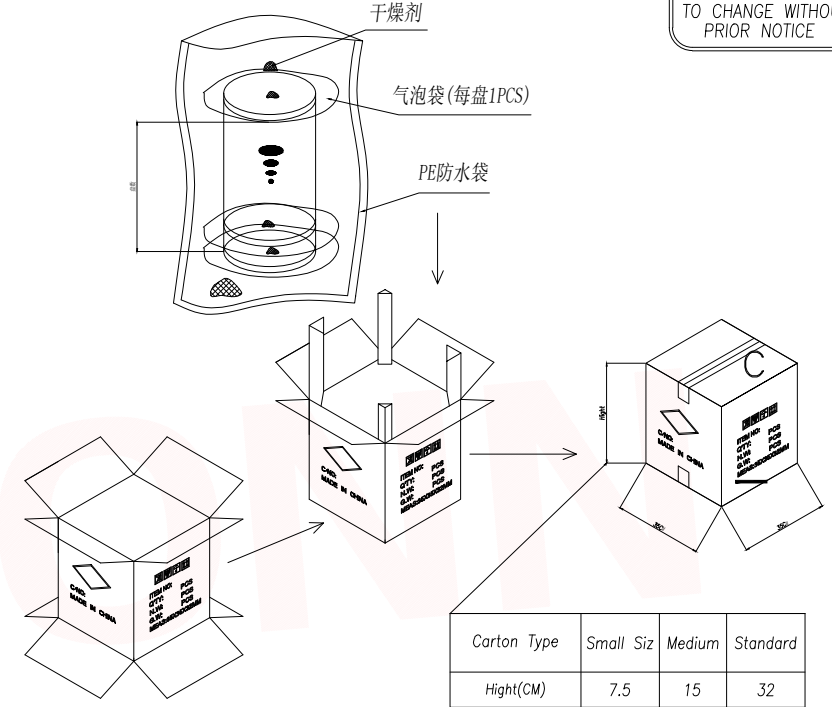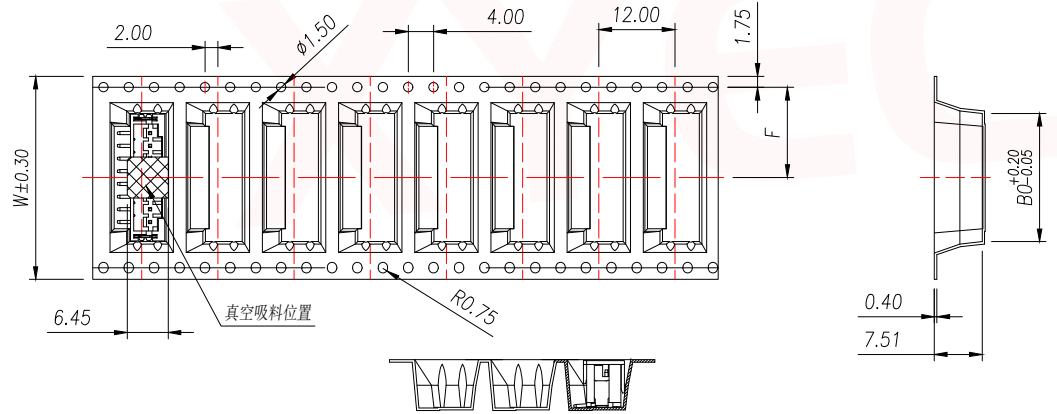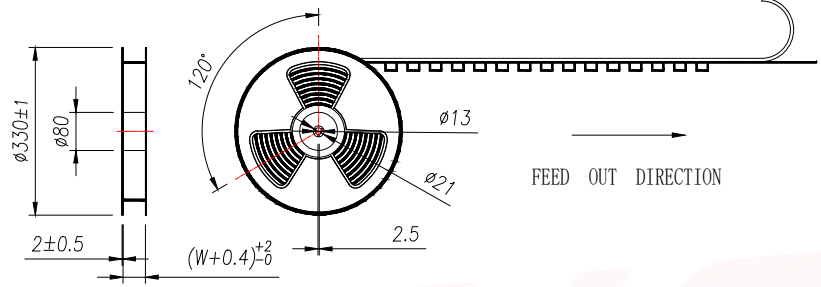

Carton Type	Small Siz	Medium	Standard
Hight(CM)	7.5	15	32

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2\text{mm}$ .
  - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
  - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
  - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
  - 5.THICKNESS:  $0.40 \pm 0.05\text{mm}$ .
  - 6.PACKING LENGHT PER REEL: 8.8 METERS.
  - 7.COMPONENT LOAD PER REEL: 700 PCS.

PIN	NO.	Dim BO	Dim W	Dim F	PCS/RELL	RELL/CARTON	PCS/CARTON
6	XY-PH2.0-6A51	16.20	32	14.2	700	8	5600
7	XY-PH2.0-7A51	18.20					
8	XY-PH2.0-8A51	20.20					
9	XY-PH2.0-9A51	22.20					
10	XY-PH2.0-10A51	24.20					
11	XY-PH2.0-11A51	26.20					
12	XY-PH2.0-12A51	28.20	44	20.2	6	4200	
13	XY-PH2.0-13A51	30.20					
14	XY-PH2.0-14A51	32.20					
15	XY-PH2.0-15A51	34.20	56	26.2	5	3500	
16	XY-PH2.0-16A51	36.20					

DIMENSION IN mm		<b>厦门市辛译精密电子有限公司</b> <b>Xiamen XinYi Xyconn Electronics Co.,Ltd</b>			
TOLERANCE UNLESS OTHERWISE SPECIFIED					
.X $\pm 0.35$	X.* $\pm 5^\circ$	APR.	Alex	TITLE: WAFER 2.00mm H6.8mm 180°SMT	
.XX $\pm 0.25$	.X* $\pm 3^\circ$	CHK.	Jack	DWG NO. XY-PH2.0-NA51	
.XXX $\pm 0.15$	.XX* $\pm 1^\circ$	DRA.	Can	PROJ.  CUSTOMER DRAWING	
		SIZE	A4	SCALE	1:1
		SHEET	3/3	REV.	A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XYECONN](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)  
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)  
[821-22-002-10-001101](#) [821-22-003-10-002101](#)