
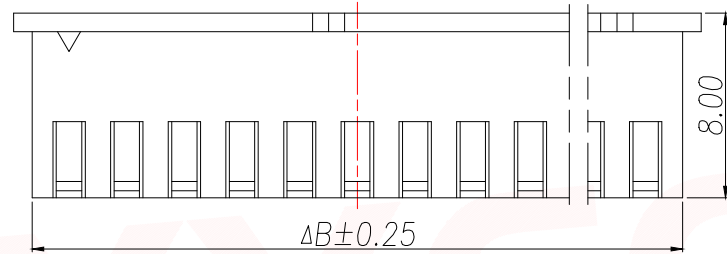
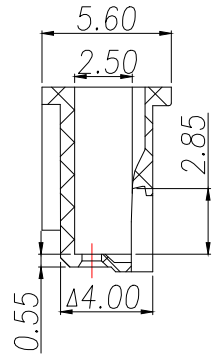
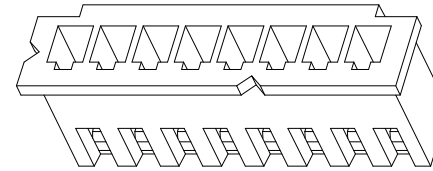




|      |      |          |      |      |
|------|------|----------|------|------|
| REV. | Q'TY | ECN. NO. | APR. | DATE |
|      |      |          |      |      |

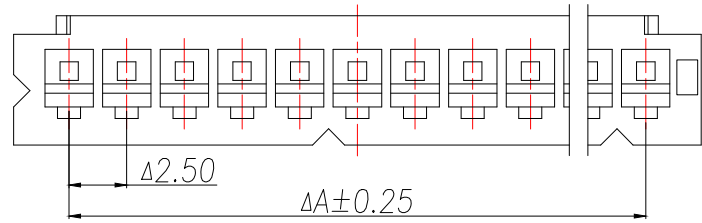

技术要求 Specification:

1. 材质 Material: PA66 UL94V-0;
2. 额定电流 Current rating: 3.0A AC, DC
3. 额定电压 Voltage rating: 250V AC, DC
4. 温度范围 Temperature range: -25℃ to +85℃
5. 接触电阻 Contact resistance: <math>\leq 20m\Omega</math>
6. 绝缘电阻 Insulation resistance: <math>\geq 1000M\Omega</math>
7. 耐压 Withstand voltage: 1000V AC/minute
8. 零件表面平整光洁, 无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象。  
Plastic surface smooth and clean, no obvious burrs, bubbles, distortion, gate strain, lack of material and other undesirable phenomena.

| Part No         | Pin | A     | B     | C     | D     |
|-----------------|-----|-------|-------|-------|-------|
| XY-XH2.54-2A41  | 2   | 2.50  | 5.70  | 3.70  | 3.70  |
| XY-XH2.54-3A41  | 3   | 5.00  | 8.20  | 6.20  | 6.20  |
| XY-XH2.54-4A41  | 4   | 7.50  | 10.70 | 8.70  | 8.70  |
| XY-XH2.54-5A41  | 5   | 10.00 | 13.20 | 11.20 | 11.20 |
| XY-XH2.54-6A41  | 6   | 12.50 | 15.70 | 13.70 | 13.70 |
| XY-XH2.54-7A41  | 7   | 15.00 | 18.20 | 16.20 | 16.20 |
| XY-XH2.54-8A41  | 8   | 17.50 | 20.70 | 18.70 | 18.70 |
| XY-XH2.54-9A41  | 9   | 20.00 | 23.20 | 21.20 | 21.20 |
| XY-XH2.54-10A41 | 10  | 22.50 | 25.70 | 23.70 | 23.70 |
| XY-XH2.54-11A41 | 11  | 25.00 | 28.20 | 26.20 | 26.20 |
| XY-XH2.54-12A41 | 12  | 27.50 | 30.70 | 28.70 | 28.70 |
| XY-XH2.54-13A41 | 13  | 30.00 | 33.20 | 31.20 | 31.20 |
| XY-XH2.54-14A41 | 14  | 32.50 | 35.70 | 33.70 | 33.70 |
| XY-XH2.54-15A41 | 15  | 35.00 | 38.20 | 36.20 | 36.20 |
| XY-XH2.54-16A41 | 16  | 37.50 | 40.70 | 38.70 | 38.70 |

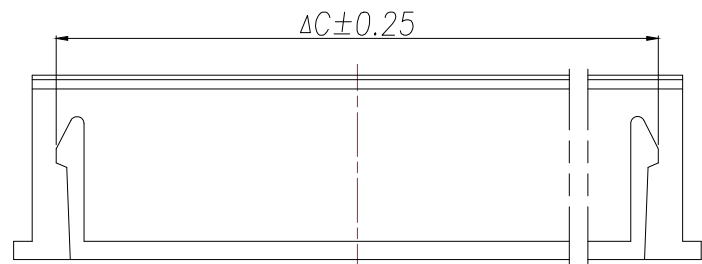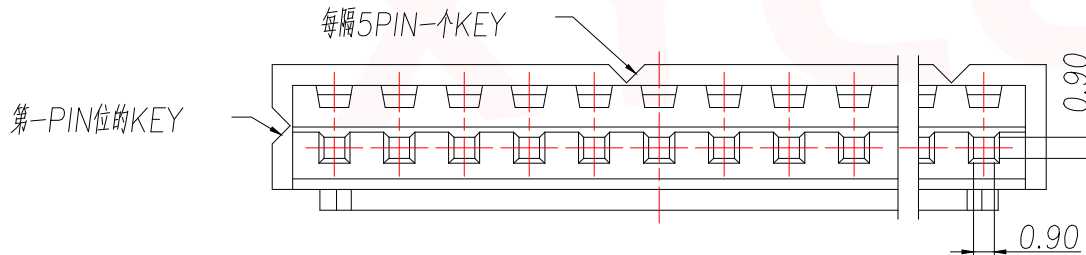

|                                      |           |  |           |                         |
|--------------------------------------|-----------|--|-----------|-------------------------|
| DIMENSION IN mm                      |           | 厦门市辛译精密电子有限公司<br>Xiamen XinYi Xyconn Electronics Co.,Ltd |           |                         |
| TOLERANCE UNLESS OTHERWISE SPECIFIED |           |  |           |                         |
| .X±0.35                              | X.*± 5°   | APR.   | Alex      | TITLE: XH2.5MM HOUSING  |
| .XX±0.25                             | .X.*± 3°  | CHK.   | Jack      | DWG NO. XY-XH2.54-NA41  |
| .XXX±0.15                            | .XX.*± 1° | DRA.   | Can       | PROJ.  CUSTOMER DRAWING |
|                                      |           | SIZE A4  | SCALE 1:1 | SHEET 1/1 REV. A        |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XYECONN](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)