

## Transient Voltage Suppressors (TVS) Data Sheet

### Features

- For surface mounted applications in order to optimize board space
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Excellent clamping capability
- 600W peak pulse power capability at 10/1000μs waveform, repetition rate (duty cycle): 0.01%
- Fast response time
- Typical  $I_R$  less than 1μA above 10V
- High Temperature soldering: 260°C/10 seconds at terminals
- Plastic package has underwriters laboratory flammability 94V-0
- Meets MSL level 1, per J-STD-020
- Safety certification: UL: E244458



### Mechanical Data

- Case: JEDEC DO-214AA. Molded plastic over glass passivated junction
- Terminal: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode except bi-directional models
- Standard Packaging: 12mm tape (EIA STD RS-481)
- Weight: 0.10g

### Applications

- I/O interface
- AC/DC power supply
- Low frequency signal transmission line (RS232, RS485, etc.)

### Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

| Rating  | Symbol          | Value       | Units |
|---|-----------------|-------------|-------|
| Peak pulse power dissipation at 10/1000μs waveform (Note1, Note2, Fig.1)  | $P_{PPM}$       | Minimum 600 | Watts |
| Peak pulse current of at 10/1000μs waveform (Note 1, Fig.3)   | $I_{PPM}$       | See Table   | Amps  |
| Steady state power dissipation at $T_A=50^\circ\text{C}$ (Fig.5)  | $P_{M(AV)}$     | 5.0         | Watts |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note3, Fig.6) | $I_{FSM}$       | 100         | Amps  |
| Operating junction and Storage Temperature Range.   | $T_J, T_{STG}$  | -65 to +150 | °C    |
| Typical thermal resistance junction to lead   | $R_{\theta JL}$ | 20          | °C/W  |
| Typical thermal resistance junction to ambient  | $R_{\theta JA}$ | 100         | °C/W  |

Notes: 1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^\circ\text{C}$  per Fig.2.

2. Mounted on 5.0mm×5.0mm (0.03mm thick) copper pads to each terminal.

3. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.

**Dimensions (SMB/DO-214AA)**

|  | Symbol | Millimeters |       | Inches |       |
|--|--------|-------------|-------|--------|-------|
|  |        | Min.        | Max.  | Min.   | Max.  |
|  | L      | 4.06        | 4.57  | 0.160  | 0.180 |
|  | D      | 3.30        | 3.94  | 0.130  | 0.155 |
|  | D1     | 1.95        | 2.20  | 0.077  | 0.086 |
|  | T      | 5.21        | 5.59  | 0.205  | 0.220 |
|  | T1     | 0.76        | 1.52  | 0.030  | 0.060 |
|  | d      | -           | 0.203 | -      | 0.008 |
|  | H      | 2.15        | 2.65  | 0.085  | 0.104 |
|  | H1     | 2.13        | 2.47  | 0.084  | 0.097 |

**Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ )**

| Part Number    |               | Device Marking Code |    | Reverse Stand-Off Voltage | Breakdown Voltage @ $I_T$ | Test Current | Maximum Clamping Voltage @ $I_{PP}$ | Peak Pulse Current | Reverse Leakage @ $V_{RWM}$ |
|----------------|---------------|---------------------|----|---------------------------|---------------------------|--------------|-------------------------------------|--------------------|-----------------------------|
| Unidirectional | Bidirectional | UNI                 | BI | $V_{RWM}(V)$              | $V_{BR}(V)$               | $I_T(mA)$    | $V_C(V)$                            | $I_{PP}(A)$        | $I_R(\mu A)$                |
| SMBJ5.0A       | SMBJ5.0CA     | KE                  | AE | 5.0                       | 6.40~7.00                 | 10           | 9.2                                 | 65.3               | 800                         |
| SMBJ6.0A       | SMBJ6.0CA     | KG                  | AG | 6.0                       | 6.67~7.37                 | 10           | 10.3                                | 58.3               | 800                         |
| SMBJ6.5A       | SMBJ6.5CA     | KK                  | AK | 6.5                       | 7.22~7.98                 | 10           | 11.2                                | 53.6               | 500                         |
| SMBJ7.0A       | SMBJ7.0CA     | KM                  | AM | 7.0                       | 7.78~8.60                 | 10           | 12.0                                | 50.0               | 200                         |
| SMBJ7.5A       | SMBJ7.5CA     | KP                  | AP | 7.5                       | 8.33~9.21                 | 1            | 12.9                                | 46.6               | 100                         |
| SMBJ8.0A       | SMBJ8.0CA     | KR                  | AR | 8.0                       | 8.89~9.83                 | 1            | 13.6                                | 44.2               | 50                          |
| SMBJ8.5A       | SMBJ8.5CA     | KT                  | AT | 8.5                       | 9.44~10.40                | 1            | 14.4                                | 41.7               | 20                          |
| SMBJ9.0A       | SMBJ9.0CA     | KV                  | AV | 9.0                       | 10.00~11.10               | 1            | 15.4                                | 39.0               | 10                          |
| SMBJ10A        | SMBJ10CA      | KX                  | AX | 10.0                      | 11.10~12.30               | 1            | 17.0                                | 35.3               | 5                           |
| SMBJ11A        | SMBJ11CA      | KZ                  | AZ | 11.0                      | 12.20~13.50               | 1            | 18.2                                | 33.0               | 1                           |
| SMBJ12A        | SMBJ12CA      | LE                  | BE | 12.0                      | 13.30~14.70               | 1            | 19.9                                | 30.2               | 1                           |
| SMBJ13A        | SMBJ13CA      | LG                  | BG | 13.0                      | 14.40~15.90               | 1            | 21.5                                | 28.0               | 1                           |
| SMBJ14A        | SMBJ14CA      | LK                  | BK | 14.0                      | 15.60~17.20               | 1            | 23.2                                | 25.9               | 1                           |
| SMBJ15A        | SMBJ15CA      | LM                  | BM | 15.0                      | 16.70~18.50               | 1            | 24.4                                | 24.6               | 1                           |
| SMBJ16A        | SMBJ16CA      | LP                  | BP | 16.0                      | 17.80~19.70               | 1            | 26.0                                | 23.1               | 1                           |
| SMBJ17A        | SMBJ17CA      | LR                  | BR | 17.0                      | 18.90~20.90               | 1            | 27.6                                | 21.8               | 1                           |
| SMBJ18A        | SMBJ18CA      | LT                  | BT | 18.0                      | 20.00~22.10               | 1            | 29.2                                | 20.6               | 1                           |
| SMBJ20A        | SMBJ20CA      | LV                  | BV | 20.0                      | 22.20~24.50               | 1            | 32.4                                | 18.6               | 1                           |
| SMBJ22A        | SMBJ22CA      | LX                  | BX | 22.0                      | 24.40~26.90               | 1            | 35.5                                | 16.9               | 1                           |
| SMBJ24A        | SMBJ24CA      | LZ                  | BZ | 24.0                      | 26.70~29.50               | 1            | 38.9                                | 15.5               | 1                           |


**Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ )**

| Part Number    |               | Device Marking Code |    | Reverse Stand-Off Voltage | Breakdown Voltage @ $I_T$ | Test Current | Maximum Clamping Voltage @ $I_{PP}$ | Peak Pulse Current | Reverse Leakage @ $V_{RWM}$ |
|----------------|---------------|---------------------|----|---------------------------|---------------------------|--------------|-------------------------------------|--------------------|-----------------------------|
| Unidirectional | Bidirectional | UNI                 | BI | $V_{RWM}(V)$              | $V_{BR}(V)$               | $I_T(mA)$    | $V_C(V)$                            | $I_{PP}(A)$        | $I_R(\mu A)$                |
| SMBJ26A        | SMBJ26CA      | ME                  | CE | 26.0                      | 28.90~31.90               | 1            | 42.1                                | 14.3               | 1                           |
| SMBJ28A        | SMBJ28CA      | MG                  | CG | 28.0                      | 31.10~34.40               | 1            | 45.4                                | 13.3               | 1                           |
| SMBJ30A        | SMBJ30CA      | MK                  | CK | 30.0                      | 33.30~36.80               | 1            | 48.4                                | 12.4               | 1                           |
| SMBJ33A        | SMBJ33CA      | MM                  | CM | 33.0                      | 36.70~40.60               | 1            | 53.3                                | 11.3               | 1                           |
| SMBJ36A        | SMBJ36CA      | MP                  | CP | 36.0                      | 40.00~44.20               | 1            | 58.1                                | 10.4               | 1                           |
| SMBJ40A        | SMBJ40CA      | MR                  | CR | 40.0                      | 44.40~49.10               | 1            | 64.5                                | 9.3                | 1                           |
| SMBJ43A        | SMBJ43CA      | MT                  | CT | 43.0                      | 47.80~52.80               | 1            | 69.4                                | 8.7                | 1                           |
| SMBJ45A        | SMBJ45CA      | MV                  | CV | 45.0                      | 50.00~55.30               | 1            | 72.7                                | 8.3                | 1                           |
| SMBJ48A        | SMBJ48CA      | MX                  | CX | 48.0                      | 53.30~58.90               | 1            | 77.4                                | 7.8                | 1                           |
| SMBJ51A        | SMBJ51CA      | MZ                  | CZ | 51.0                      | 56.70~62.70               | 1            | 82.4                                | 7.3                | 1                           |
| SMBJ54A        | SMBJ54CA      | NE                  | DE | 54.0                      | 60.00~66.30               | 1            | 87.1                                | 6.9                | 1                           |
| SMBJ58A        | SMBJ58CA      | NG                  | DG | 58.0                      | 64.40~71.20               | 1            | 93.6                                | 6.5                | 1                           |
| SMBJ60A        | SMBJ60CA      | NK                  | DK | 60.0                      | 66.70~73.70               | 1            | 96.8                                | 6.2                | 1                           |
| SMBJ64A        | SMBJ64CA      | NM                  | DM | 64.0                      | 71.10~78.60               | 1            | 103.0                               | 5.9                | 1                           |
| SMBJ70A        | SMBJ70CA      | NP                  | DP | 70.0                      | 77.80~86.00               | 1            | 113.0                               | 5.3                | 1                           |
| SMBJ75A        | SMBJ75CA      | NR                  | DR | 75.0                      | 83.30~92.10               | 1            | 121.0                               | 5.0                | 1                           |
| SMBJ78A        | SMBJ78CA      | NT                  | DT | 78.0                      | 86.70~95.80               | 1            | 126.0                               | 4.8                | 1                           |
| SMBJ85A        | SMBJ85CA      | NV                  | DV | 85.0                      | 94.40~104.00              | 1            | 137.0                               | 4.4                | 1                           |
| SMBJ90A        | SMBJ90CA      | NX                  | DX | 90.0                      | 100.00~111.00             | 1            | 146.0                               | 4.1                | 1                           |
| SMBJ100A       | SMBJ100CA     | NZ                  | DZ | 100.0                     | 111.00~123.00             | 1            | 162.0                               | 3.7                | 1                           |
| SMBJ110A       | SMBJ110CA     | PE                  | EE | 110.0                     | 122.00~135.00             | 1            | 177.0                               | 3.4                | 1                           |
| SMBJ120A       | SMBJ120CA     | PG                  | EG | 120.0                     | 133.00~147.00             | 1            | 193.0                               | 3.1                | 1                           |
| SMBJ130A       | SMBJ130CA     | PK                  | EK | 130.0                     | 144.00~159.00             | 1            | 209.0                               | 2.9                | 1                           |
| SMBJ150A       | SMBJ150CA     | PM                  | EM | 150.0                     | 167.00~185.00             | 1            | 243.0                               | 2.5                | 1                           |
| SMBJ160A       | SMBJ160CA     | PP                  | EP | 160.0                     | 178.00~197.00             | 1            | 259.0                               | 2.3                | 1                           |
| SMBJ170A       | SMBJ170CA     | PR                  | ER | 170.0                     | 189.00~209.00             | 1            | 275.0                               | 2.2                | 1                           |
| SMBJ180A       | SMBJ180CA     | PT                  | ET | 180.0                     | 201.00~222.00             | 1            | 292.0                               | 2.1                | 1                           |
| SMBJ190A       | SMBJ190CA     | PA                  | EC | 190.0                     | 211.00~233.00             | 1            | 308.0                               | 2.0                | 1                           |
| SMBJ200A       | SMBJ200CA     | PV                  | EV | 200.0                     | 224.00~247.00             | 1            | 324.0                               | 1.9                | 1                           |
| SMBJ210A       | SMBJ210CA     | PB                  | ED | 210.0                     | 237.00~263.00             | 1            | 340.0                               | 1.8                | 1                           |
| SMBJ220A       | SMBJ220CA     | PX                  | EX | 220.0                     | 246.00~272.00             | 1            | 356.0                               | 1.7                | 1                           |
| SMBJ250A       | SMBJ250CA     | PZ                  | EZ | 250.0                     | 279.00~309.00             | 1            | 405.0                               | 1.5                | 1                           |
| SMBJ300A       | SMBJ300CA     | QE                  | FE | 300.0                     | 335.00~371.00             | 1            | 486.0                               | 1.3                | 1                           |
| SMBJ350A       | SMBJ350CA     | QG                  | FG | 350.0                     | 391.00~432.00             | 1            | 567.0                               | 1.1                | 1                           |
| SMBJ400A       | SMBJ400CA     | QK                  | FK | 400.0                     | 447.00~494.00             | 1            | 648.0                               | 0.9                | 1                           |
| SMBJ440A       | SMBJ440CA     | QM                  | FM | 440.0                     | 492.00~543.00             | 1            | 713.0                               | 0.9                | 1                           |


Notes: For bidirectional type having  $V_{RWM}$  of 10V and less, the  $I_R$  limit is double.

**Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$  unless otherwise noted)**

**Figure 1. Peak Pulse Power Rating Curve**

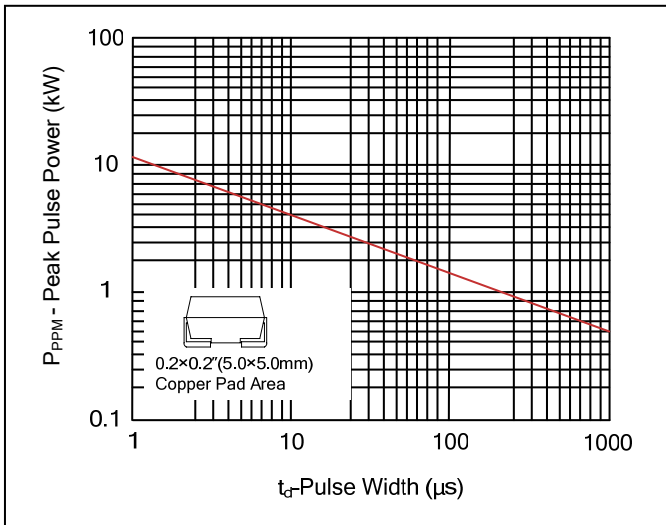


**Figure 2. Pulse Derating Curve**

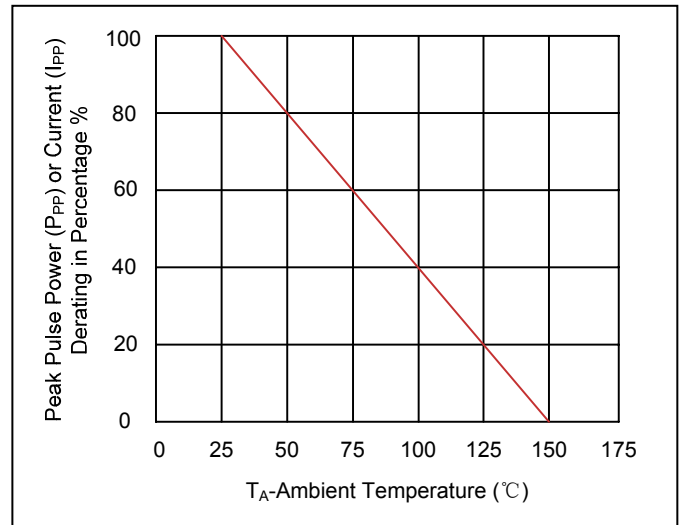


**Figure 3. Pulse Waveform**




**Figure 4. Typical Junction Capacitance**

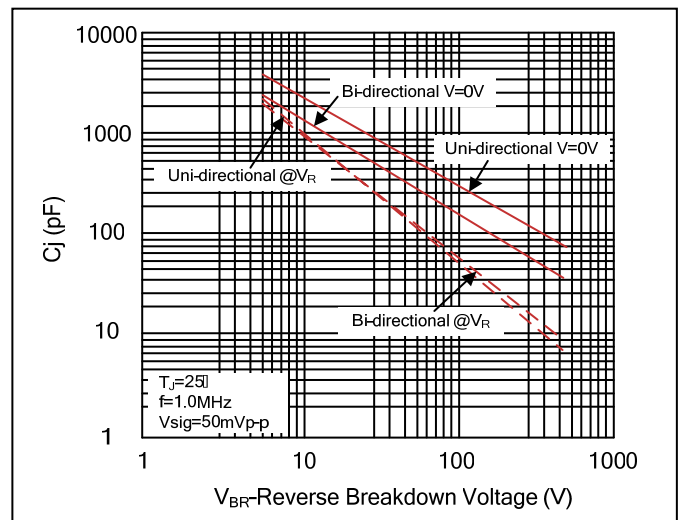

**Figure 5. Steady State Power Dissipation Derating Curve**

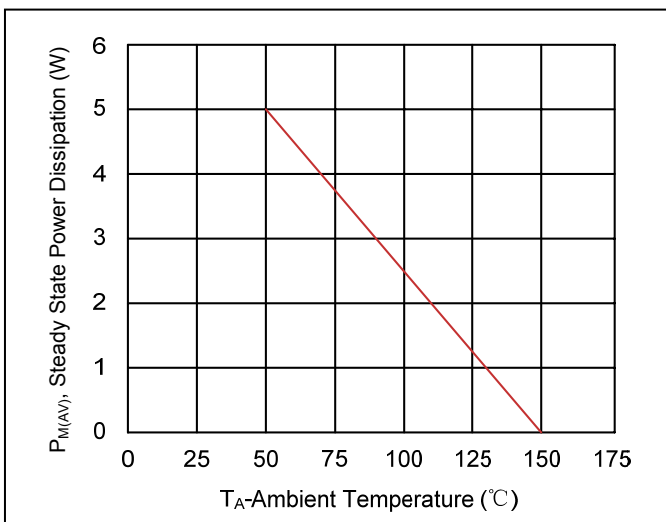

**Figure 6. Maximum Non-Repetitive Forward Surge Current Uni-Directional Only**

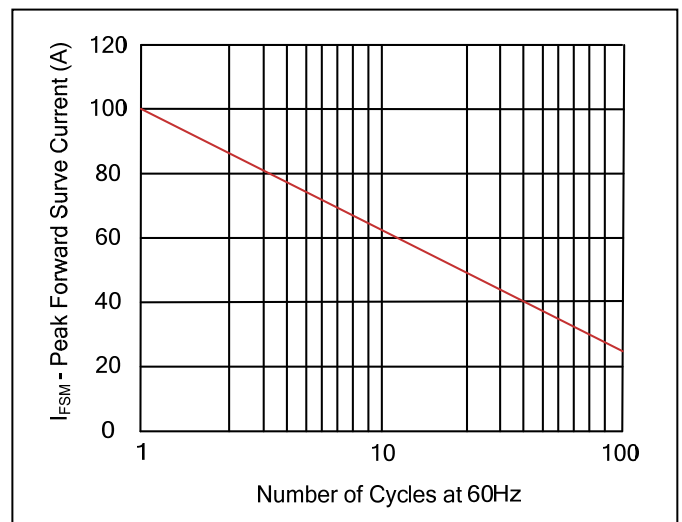


**Recommended Soldering Conditions**




**Recommended Conditions**

| Profile Feature   | Pb-Free Assembly                 |
|---|----------------------------------|
| Average ramp-up rate ( $T_L$ to $T_P$ )   | 3°C/second max.                  |
| Preheat<br>-Temperature Min ( $T_{S\ min}$ )<br>-Temperature Max ( $T_{S\ max}$ )<br>-Time (min to max) ( $t_s$ ) | 150°C<br>200°C<br>60-180 seconds |
| $T_{S\ max}$ to $T_L$<br>-Ramp-up Rate  | 3°C/second max.                  |
| Time maintained above:<br>-Temperature ( $T_L$ )<br>-Time ( $t_L$ )   | 217°C<br>60-150 seconds          |
| Peak Temperature ( $T_P$ )  | 260°C                            |
| Time within 5°C of actual Peak Temperature ( $t_p$ )  | 20-40 seconds                    |
| Ramp-down Rate  | 6°C/second max.                  |
| Time 25°C to Peak Temperature   | 8 minutes max.                   |

**Marking Code**

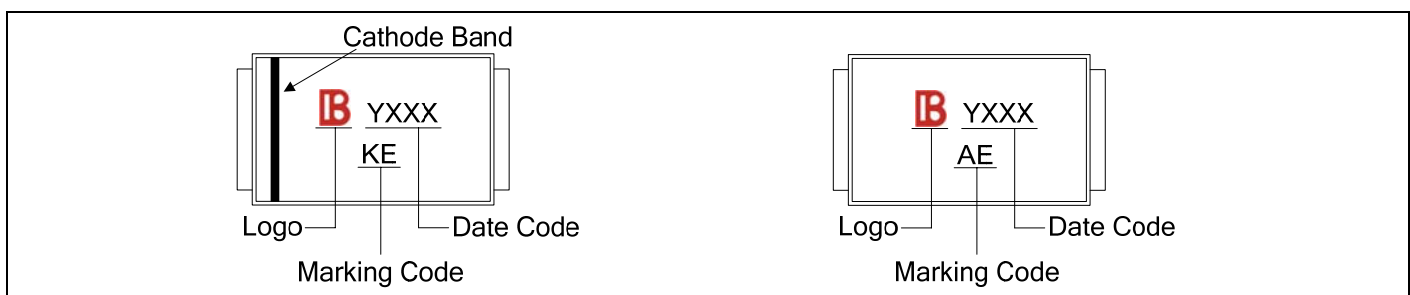

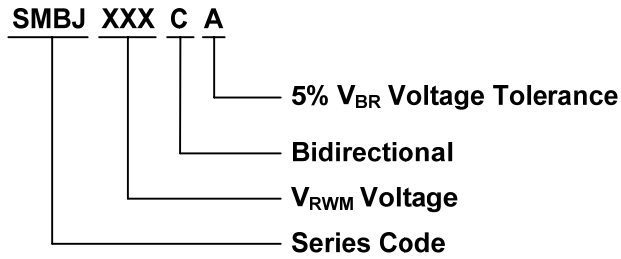

**Packaging**

| Tape    | Symbol            | Dimension (mm) |
|---------|-------------------|----------------|
|         | W                 | 12.00±0.20     |
|         | P0                | 4.00±0.10      |
|         | P1                | 8.00±0.10      |
|         | P2                | 2.00±0.10      |
|         | D0                | Φ1.55±0.10     |
|         | D1                | Φ1.5±0.10      |
|         | E                 | 1.75±0.10      |
|         | F                 | 5.50±0.10      |
|         | A0                | 3.86±0.15      |
|         | B0                | 5.65±0.10      |
|         | K0                | 2.75±0.15      |
|         | T                 | 0.25±0.05      |
|         | SECTION A-A       |                |
|         | SECTION B-B       |                |
| 7" Reel | D2                | Φ178.0±2.0     |
|         | D3                | Φ50.0Min.      |
|         | D4                | Φ13.0±0.5      |
|         | W1                | 16.0±2.0       |
|         | Quantity: 500PCS  |                |
|         | 13" Reel          | D5             |
|         | D6                | Φ13.5±0.5      |
|         | H                 | 2.5±1.0        |
|         | W2                | 16.0±2.0       |
|         | Quantity: 3000PCS |                |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Yageo](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-](#)  
[HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)  
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)