


# IC 59 SERIES SDIP (Shrink 1.778mm pitch)

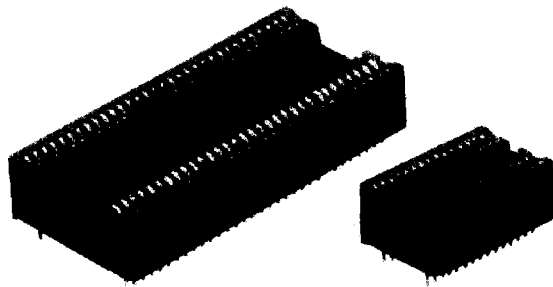

## FEATURES

- Shrink pitch (1.778mm) sockets for high-density mounting.
- Dual wipe contact ensures high reliability.
- A piggy-back design allows replacement of the top socket without desoldering.

## SPECIFICATIONS

### PERFORMANCE

Insulation Resistance	1,000M $\Omega$ min. at 500VDC
Dielectric Withstanding Voltage	1,000VAC rms for 1 minute
Contact Resistance	20m $\Omega$ max. at 10mA
Current Rating	1A
Operating Temperature Range	170°C max. continuous

### MATERIAL AND FINISH


Housing	PPS (glass-filled), UL94V-0 rated
Contacts	Copper alloy, gold plating over nickel

## ORDERING CODE


**IC59—4806—G4MF**

MF = With
Flange option: Unmarked = Without
Straight solder dip terminal
Type of contact plating G = Gold
Distance between IC terminal rows: 6 = 0.6 inches
Number of leads
IC59 series


### ●Outline Dimensions

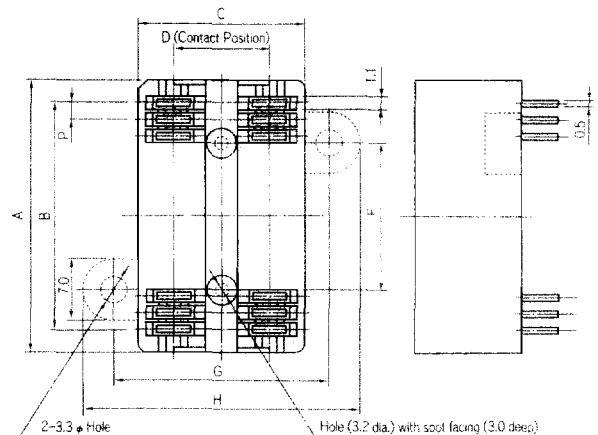

### ●Detail of Contact



### ●Recommended PC Board Patterns (TOP VIEW)



Part No.	No. of Leads	P	K	B	G	D	E	F	G	H	Over-Molding Hole
IC59—1403—G4 (MF)	14	1.778	14.5	10.668	15.0	7.80	—	6.0	21.0	28.0	—
IC59—1803—G4 (MF)	18	1.778	18.5	14.224	15.0	7.80	—	8.0	21.0	28.0	—
IC59—2203—G4 (MF)	22	1.778	22.0	17.78	15.0	7.80	—	11.0	21.0	28.0	—
IC59—2403—G4 (MF)	24	1.778	24.0	19.556	15.0	7.80	2.0	12.0	21.0	28.0	—
IC59—3004—G4 (MF)	30	1.780	29.0	24.92	18.0	10.80	3.0	16.0	24.0	31.0	—
IC59—3605—G4 (MF)	36	1.778	35.0	30.226	20.4	13.20	6.0	22.5	26.4	33.4	—
IC59—4206—G4 (MF)	42	1.778	39.5	35.56	23.5	16.54	10.0	20.0	29.0	36.0	○
IC59—4806—G4 (MF)	48	1.778	45.0	40.894	23.5	16.54	10.0	25.0	29.0	36.0	○
IC59—5406—G4 (MF)	54	1.778	50.5	46.228	23.5	16.54	10.0	30.0	29.0	36.0	○
IC59—64075—G4 (MF)	64	1.778	60.0	55.118	27.5	20.32	11.5	40.0	33.5	40.5	○

(Note) IC59—3605 has a leg straightening slot.

Unit = mm

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [IC & Component Sockets](#) category:*

*Click to view products by [Yamaichi](#) manufacturer:*

Other Similar products are found below :

[0066-3-17-15-30-14-02-0](#) [670](#) [672](#) [673](#) [694-13-640-00-672-000](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-308-41-007000](#) [PX-68LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#) [AKSUN 37V-T](#) [1437503-9](#) [1437504-1](#) [146-44-308-41-013000](#) [146-43-308-41-012000](#) [160-10-308-00-001000](#) [160-40-320-00-001000](#) [214-99-306-01-670800](#) [232-1270-02-0602](#) [2-382761-4](#) [2-5331677-4](#) [2-640360-3](#) [2801-2-00-50-00-00-07-0](#)