





Surface Mount Transient Voltage Suppressor Diodes

Uni-directional



Bi-directional



Features

- For surface mounted applications
- Low-profile package
- Ideal for automated placement
- Available in Unidirectional and Bidirectional
- 1500W peak pulse power capability with a 10/1000 μ s waveform
- Low incremental surge resistance, excellent clamping capability
- Very fast response time
- High temperature soldering guaranteed: 260 °C/10 s at terminals
- Meets MSL level 1
- Component in accordance to RoHS

Typical Applications

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, telecommunication.

Mechanical Data

- **Package:** DO-214AB (SMC)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** For uni-directional types the band denotes cathode end, no marking on bi-directional types

■Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	Max
Peak power dissipation ⁽¹⁾⁽²⁾	P_{PPM}	W	with a 10/1000us waveform	1500
Peak pulse current ⁽¹⁾	I_{PPM}	A	with a 10/1000us waveform	See Next Table
Power dissipation ⁽²⁾	P_D	W	on infinite heat sink at $T_L=75^\circ\text{C}$	6.5
Peak forward surge current ⁽³⁾	I_{FSM}	A	8.3 ms single half sine-wave unidirectional only	200
Operating junction and storage temperature range	T_J, T_{STG}	$^\circ\text{C}$		-55 to +150

■Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Maximum instantaneous forward voltage at 100A for unidirectional only ⁽⁴⁾	V_{FM}	V	3.5/5.0



1.5SMC SERIES

■ Thermal Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Thermal Resistance(Typical)	$R_{\theta JA}^{(5)}$	°C/W	junction to ambient	75
	$R_{\theta JL}$	°C/W	junction to lead	15

Notes:

- (1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig.2.
- (2) Mounted on 0.31 x 0.31" (8.0 x 8.0 mm) copper pads to each terminal
- (3) Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.
- (4) $V_F=3.5\text{V}$ Max for devices of $V_{BR}\leq 220\text{V}$, and $V_F=5.0\text{V}$ Max for devices of $V_{BR}>220\text{V}$.
- (5) Mounted on minimum recommended pad layout.

■ Electrical Characteristics (TA=25°C unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Breakdown Voltage $V_{BR}@I_T$			Maximum Reverse Leakage $I_R^{(3)}$ @ V_{RWM} (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current $I_{PP}^{(2)}$ (A)	Maximum Clamping Voltage V_c @ I_{PP} (V)
		Min(V)	Max (V)	$I_T^{(1)}$ (mA)				
1.5SMC6.8A	1.5SMC6.8CA	6.46	7.14	10	1000	5.8	142.86	10.5
1.5SMC7.5A	1.5SMC7.5CA	7.13	7.88	10	500	6.4	132.74	11.3
1.5SMC8.2A	1.5SMC8.2CA	7.79	8.61	10	200	7.0	123.97	12.1
1.5SMC9.1A	1.5SMC9.1CA	8.65	9.56	1	50	7.8	111.94	13.4
1.5SMC10A	1.5SMC10CA	9.50	10.50	1	10	8.6	103.45	14.5
1.5SMC11A	1.5SMC11CA	10.45	11.55	1	5	9.4	96.15	15.6
1.5SMC12A	1.5SMC12CA	11.40	12.60	1	5	10.2	89.82	16.7
1.5SMC13A	1.5SMC13CA	12.35	13.65	1	5	11.1	82.42	18.2
1.5SMC15A	1.5SMC15CA	14.25	15.75	1	5	12.8	70.75	21.2
1.5SMC16A	1.5SMC16CA	15.20	16.80	1	5	13.6	66.67	22.5
1.5SMC18A	1.5SMC18CA	17.10	18.90	1	5	15.3	59.52	25.2
1.5SMC20A	1.5SMC20CA	19.00	21.00	1	5	17.1	54.15	27.7
1.5SMC22A	1.5SMC22CA	20.90	23.10	1	5	18.8	49.02	30.6
1.5SMC24A	1.5SMC24CA	22.80	25.20	1	5	20.5	45.18	33.2
1.5SMC27A	1.5SMC27CA	25.65	28.35	1	5	23.1	40.00	37.5
1.5SMC30A	1.5SMC30CA	28.50	31.50	1	5	25.6	36.23	41.4
1.5SMC33A	1.5SMC33CA	31.35	34.65	1	5	28.2	32.82	45.7
1.5SMC36A	1.5SMC36CA	34.20	37.80	1	5	30.8	30.06	50.0
1.5SMC39A	1.5SMC39CA	37.05	40.95	1	5	33.3	27.83	53.9
1.5SMC43A	1.5SMC43CA	40.85	45.15	1	5	36.8	25.30	59.3
1.5SMC47A	1.5SMC47CA	44.65	49.35	1	5	40.2	23.15	64.8
1.5SMC51A	1.5SMC51CA	48.45	53.55	1	5	43.6	21.40	70.1
1.5SMC56A	1.5SMC56CA	53.20	58.80	1	5	47.8	19.48	77.0
1.5SMC62A	1.5SMC62CA	58.90	65.10	1	5	53.0	17.65	85.0
1.5SMC68A	1.5SMC68CA	64.60	71.40	1	5	58.1	16.30	92.0
1.5SMC75A	1.5SMC75CA	71.25	78.75	1	5	64.1	14.56	103.0
1.5SMC82A	1.5SMC82CA	77.90	86.10	1	5	70.1	13.27	113.0
1.5SMC91A	1.5SMC91CA	86.45	95.35	1	5	77.8	12.00	125.0
1.5SMC100A	1.5SMC100CA	95.00	105.00	1	5	85.5	10.95	137.0
1.5SMC110A	1.5SMC110CA	104.50	115.50	1	5	94.0	9.87	152.0
1.5SMC120A	1.5SMC120CA	114.00	126.00	1	5	102.0	9.09	165.0



1.5SMC SERIES

■ Electrical Characteristics (TA=25°C unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Breakdown Voltage $V_{BR}@I_T$			Maximum Reverse Leakage I_R ⁽³⁾ @ V_{RWM} (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current $I_{PP}^{(2)}$ (A)	Maximum Clamping Voltage V_c @ I_{PP} (V)
		Min(V)	Max (V)	$I_T^{(1)}$ (mA)				
1.5SMC130A	1.5SMC130CA	123.50	136.50	1	5	111.0	8.38	179.0
1.5SMC150A	1.5SMC150CA	142.50	157.50	1	5	128.0	7.25	207.0
1.5SMC160A	1.5SMC160CA	152.00	168.00	1	5	136.0	6.85	219.0
1.5SMC170A	1.5SMC170CA	161.50	178.50	1	5	145.0	6.41	234.0
1.5SMC180A	1.5SMC180CA	171.00	189.00	1	5	154.0	6.10	246.0
1.5SMC200A	1.5SMC200CA	190.00	210.00	1	5	171.0	5.47	274.0
1.5SMC220A	1.5SMC220CA	209.00	231.00	1	5	185.0	4.57	328.0
1.5SMC250A	1.5SMC250CA	237.50	262.50	1	5	214.0	4.36	344.0
1.5SMC300A	1.5SMC300CA	285.00	315.00	1	5	256.0	3.62	414.0
1.5SMC350A	1.5SMC350CA	332.50	367.50	1	5	299.3	3.11	482.0
1.5SMC380A	1.5SMC380CA	361.00	399.00	1	5	324.9	2.86	524.4
1.5SMC400A	1.5SMC400CA	380.00	420.00	1	5	342.0	2.72	548.0
1.5SMC440A	1.5SMC440CA	418.00	462.00	1	5	376.2	2.47	602.0
1.5SMC500A	1.5SMC500CA	475.00	525.00	1	5	427.5	2.17	690.0
1.5SMC520A	1.5SMC520CA	494.00	546.00	1	5	444.6	2.09	717.6
1.5SMC550A	1.5SMC550CA	522.50	577.50	1	5	470.3	1.98	759.0
1.5SMC600A	1.5SMC600CA	570.00	630.00	1	5	513.0	1.81	828.0

Notes:

- (1) Pulse Test: $t_p \leq 50ms$.
- (2) Surge current waveform per Fig. 3 and derated per Fig.2.
- (3) For bi-directional types having V_{RWM} of 10 V and less, the I_R limit is doubled.

■ Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
1.5SMC SERIES	F1	Approximate 0.257	3000	/	42000	13" reel

■ Characteristics (Typical)

FIG1: Peak Pulse Power Rating Curve


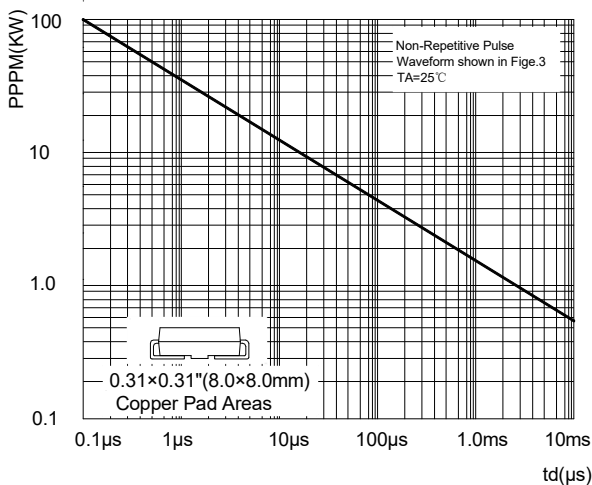


FIG2: Pulse Power or Current vs. Initial Junction Temperature



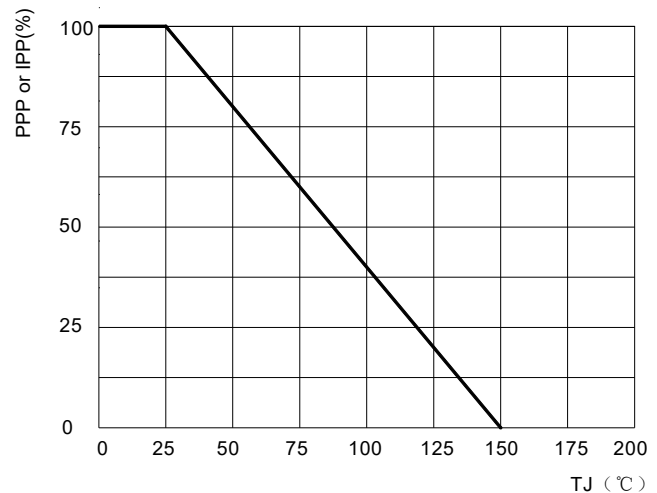

1.5SMC SERIES

■ Characteristics (Typical)

FIG3: Pulse Waveform

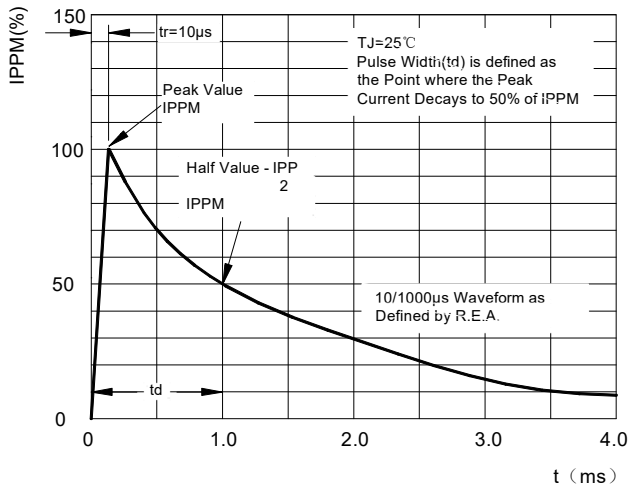


FIG4: Typical Transient Thermal Impedance

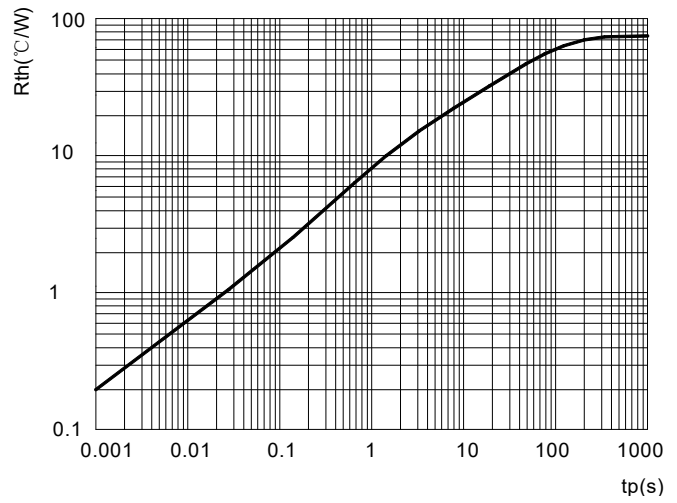


FIG5: Maximum Non-Repetitive Surge Current


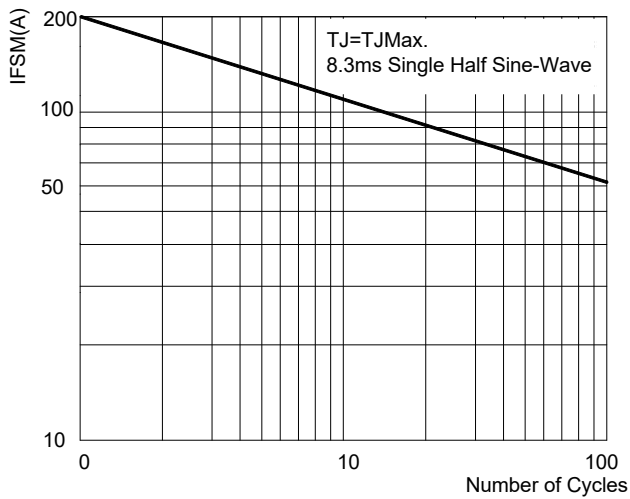



FIG6: Steady State Power Dissipation



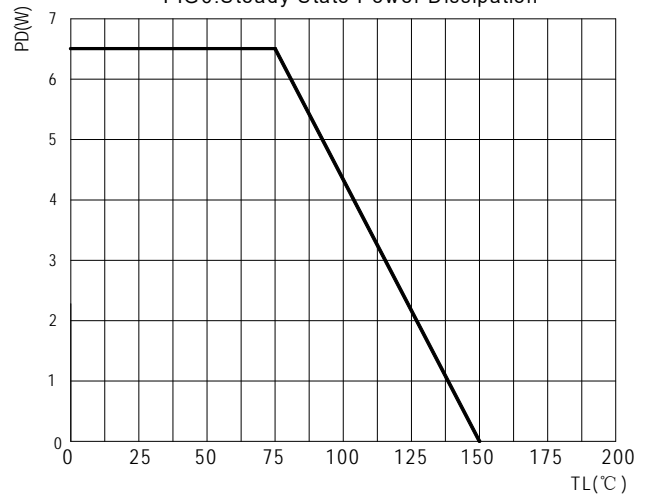


1.5SMC SERIES

■ Outline Dimensions

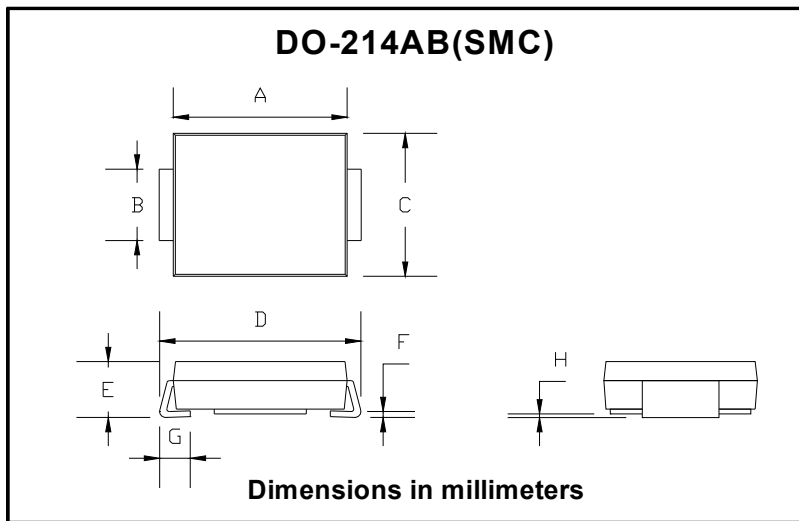

DO-214AB (SMC)		
Dim	Min	Max
A	6.60	7.11
B	2.85	3.27
C	5.59	6.22
D	7.75	8.13
E	1.99	2.61
F	0.15	0.31
G	0.76	1.52
H	0.05	0.20

■ Suggested pad layout

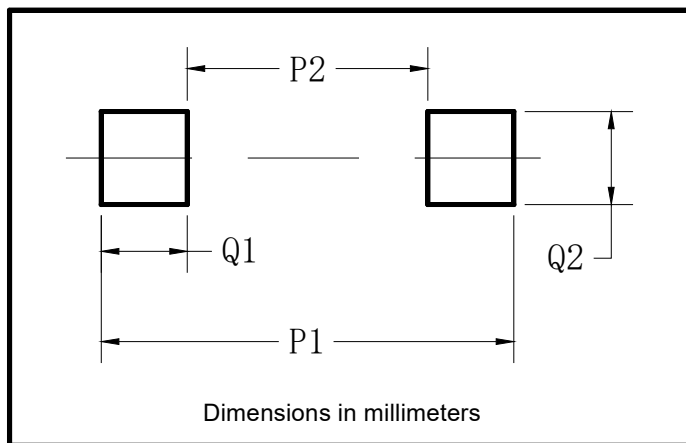

Dim	Typ
P1	9.9
P2	3.84
Q1	3.03
Q2	3.82



1.5SMC SERIES

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Yangjie](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SM1605E3/TR13](#)
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)