


PNP General Purpose Amplifier

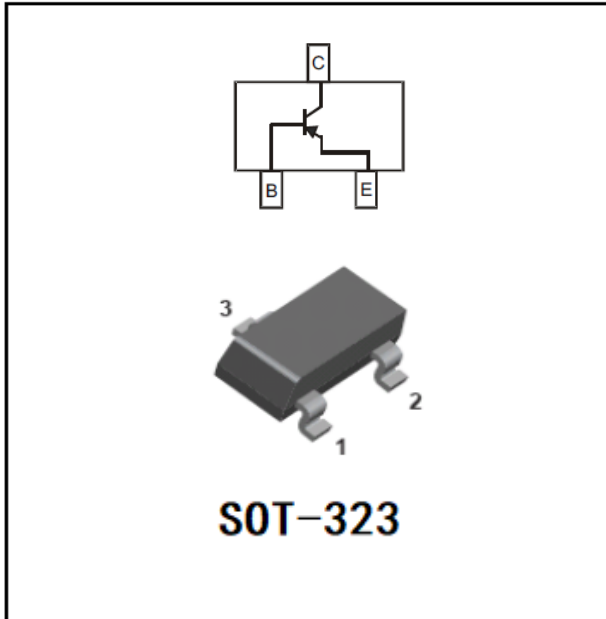

Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- Marking: K4M

■ Maximum Ratings (Ta=25°C)

Item	Symbol	Unit	Conditions	Value
Collector-Emitter Voltage*	V_{CEO}	V	$I_C = -1.0\text{mA}, I_B = 0$	-150
Collector-Base Voltage	V_{CBO}	V	$I_C = -100\mu\text{A}, I_E = 0$	-160
Emitter-Base Voltage	V_{EBO}	V	$I_E = -10\mu\text{A}, I_C = 0$	-5.0
Collector Current	I_C	mA		-600
Collector Power Dissipation	P_C	mW		200
Operation Junction Temperature	T_j	°C		150
Storage Temperature	T_{stg}	°C		-55 to +150



MMST5401

■Electrical Characteristics (T_a=25°C)

Item	Symbol	Unit	Conditions	Min	Max
Collector-Emitter Voltage	V _{CEO}	V	I _C =-1.0mA, I _B =0	-150	
Collector-Base Voltage	V _{CBO}	V	I _C =-100μA, I _E =0	-160	
Emitter-Base Voltage	V _{EBO}	V	I _E =-10μA, I _C =0	-5	
Collector-Base Cut-off Current	I _{CBO}	nA	V _{CB} =-120Vdc		-50
Emitter-Base Cut-off Current	I _{EBO}	nA	V _{EB} =-3Vdc		-50
DC Current Gain	h _{FE}		I _C =-1.0mA V _{CE} =-5.0Vdc	50	
			I _C =-10mA V _{CE} =-5.0Vdc	60	300
			I _C =-50mA V _{CE} =-5.0Vdc	50	
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V	I _C =-50mA I _B =-5.0mA		-0.5
Base-Emitter Saturation Voltage	V _{BE(sat)}	V	I _C =-50mA I _B =-5.0mA		-1.0

■Small-signal Characteristics (T_a=25°C)

Item	Symbol	Unit	Conditions	Min	Max
Transition frequency	f _T	MHz	I _C =-10mA, V _{CE} =-10Vdc, f=100MHz	100	300


■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMST5401	F2	Approximate 0.005	3000	30000	120000	7" reel




■ Characteristics(Typical)


Static Characteristic

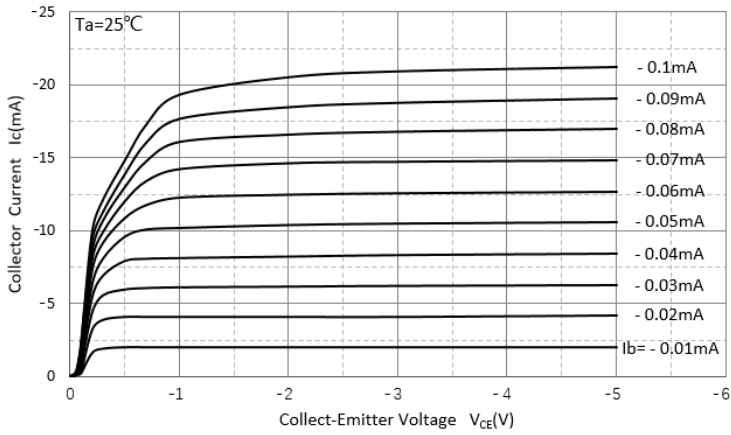


DC Current Gain

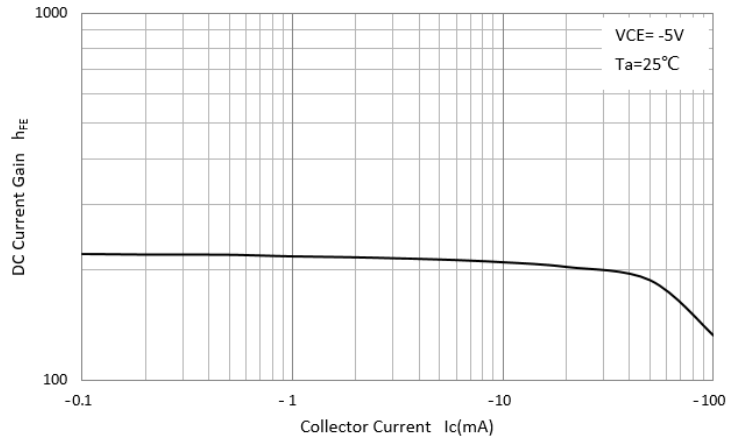


Collector-Emmitter Saturation Voltage

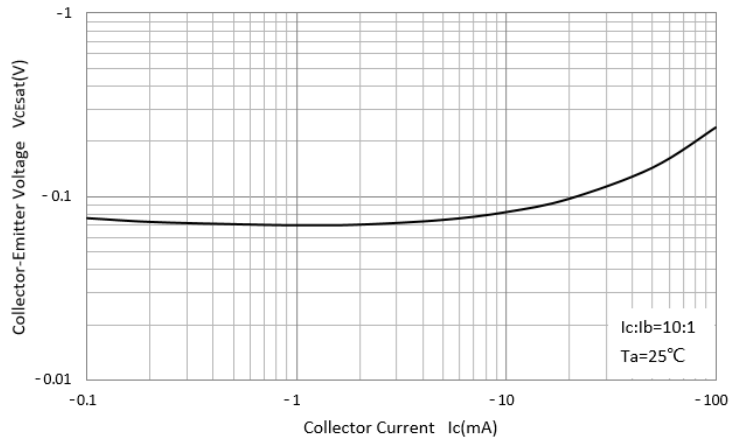


Base-Emmitter Saturation Voltage

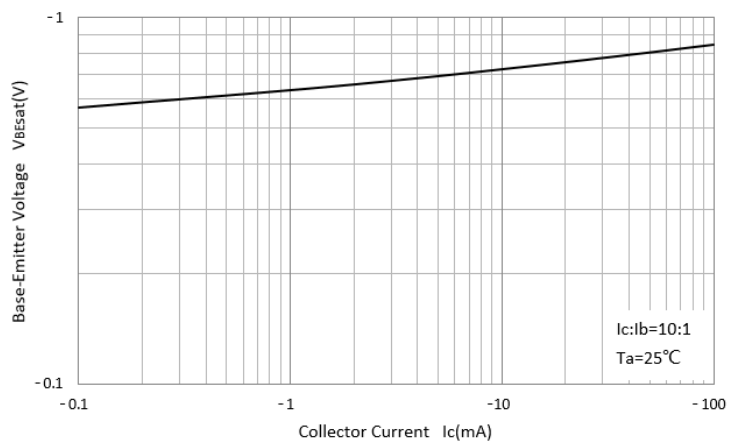

Base-Emmitter On Voltage

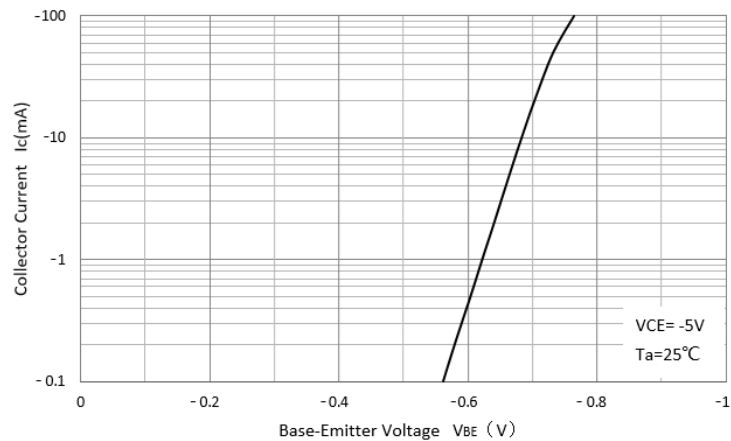


$C_{ob}/C_{ib}-V_{CB}/V_{EB}$

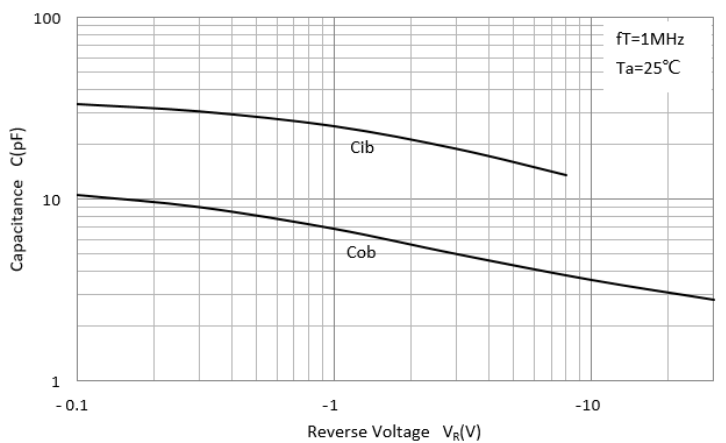




MMST5401

■SOT-323 Package Outline Dimensions

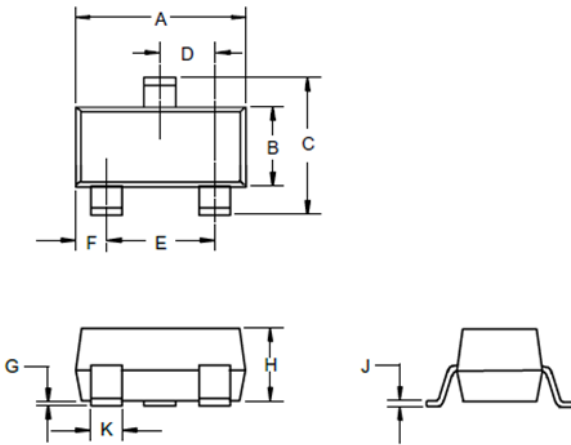

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.006	.016	.15	.40	

■SOT-323 Soldering Footprint

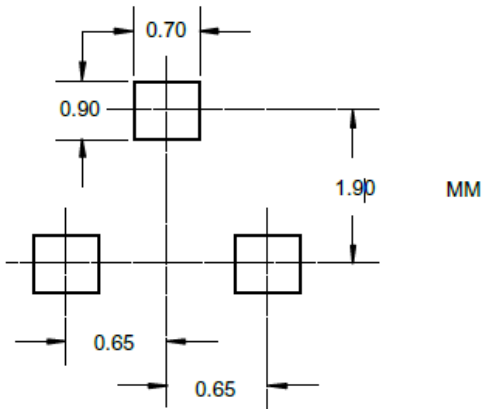



MMST5401

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Yangjie manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)