



## Surface Mount Transient Voltage Suppressor Diodes


### Uni-directional



### Features

- Low profile package
- Ideal for automated placement
- Available in Uni-directional and Bi-directional
- 3000W peak pulse power capability with a 10/1000  $\mu$ s waveform
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Meets MSL level 1, per J-STD-020C, LF maximum peak of 260 °C
- ESD protection of data lines in accordance with IEC 61000-4-2, 30kV(Air),30kV (Contact)
- Part no. with suffix "Q" means AEC-Q101 qualified

### Bi-directional



### Typical Applications

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive,telecommunication.

### Mechanical Data

- **Package:** DO-214AB (SMC)  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** For uni-directional types the band denotes cathode end, no marking on bi-directional types

### ■Maximum Ratings ( $T_a=25^\circ\text{C}$ Unless otherwise specified )

PARAMETER	SYMBOL	UNIT	Max
Peak power dissipation, with a 10/1000us waveform <sup>(1)</sup> <sup>(2)</sup> (Fig.1)	$P_{PPM}$	W	3000
Peak pulse current, with a 10/1000us waveform <sup>(1)</sup>	$I_{PPM}$	A	See Next Table
Power dissipation, on infinite heat sink at $T_L=75^\circ\text{C}$ <sup>(2)</sup>	$P_D$	W	6.5
Peak forward surge current, 8.3 ms single half sine-wave unidirectional only <sup>(3)</sup>	$I_{FSM}$	A	300
Operating junction	$T_J$	$^\circ\text{C}$	-55 to +175
Storage temperature range	$T_{STG}$	$^\circ\text{C}$	-55 to +175

### ■Electrical Characteristics ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Maximum instantaneous forward voltage @at 100A for unidirectional only	$V_F$	V	3.5



# SMDJ5.0AQ THRU SMDJ48CAQ

## ■ Thermal Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Thermal Resistance(Typical)	R <sub>θJA</sub>	°C/W	junction to ambient	75
	R <sub>θJL</sub>	°C/W	junction to lead	15

Notes:

- (1) Non-repetitive current pulse, per Fig.3 and derated above T<sub>J</sub>= 25°C per Fig.2.
- (2) Mounted on 0.31 x 0.31" (8.0 x 8.0 mm) copper pads to each terminal.
- (3) Measured on 8.3ms single half sine-wave or equivalent square wave,duty cycle=4 pulses per minute maximum.

## ■ Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SMDJ SERIES	F1	Approximate 0.257	3000	42000	13" reel

## ■ Electrical Characteristics (Ta=25°C Unless otherwise specified)

Part Number (Uni)	Part Number (Bi)	Breakdown Voltage V <sub>BR</sub> @I <sub>T</sub>			Maximum Reverse Leakage I <sub>R</sub> <sup>(5)</sup> @ V <sub>RWM</sub> (μA)	Working Peak Reverse Voltage V <sub>RWM</sub> (V)	Maximum Reverse Surge Current I <sub>PP</sub> <sup>(6)</sup> (A)	Maximum Clamping Voltage V <sub>c</sub> @ I <sub>PP</sub> (V)
		Min(V)	Max (V)	I <sub>T</sub> <sup>(4)</sup> (mA)				
SMDJ5.0AQ	SMDJ5.0CAQ <sup>(7)</sup>	6.4	7.07	10	1000	5	326.09	9.2
SMDJ6.0AQ	SMDJ6.0CAQ	6.67	7.37	10	1000	6	291.26	10.3
SMDJ6.5AQ	SMDJ6.5CAQ	7.22	7.98	10	500	6.5	267.86	11.2
SMDJ7.0AQ	SMDJ7.0CAQ	7.78	8.6	10	200	7	250	12
SMDJ7.5AQ	SMDJ7.5CAQ	8.33	9.21	1	100	7.5	232.56	12.9
SMDJ8.0AQ	SMDJ8.0CAQ	8.89	9.83	1	50	8	220.59	13.6
SMDJ8.5AQ	SMDJ8.5CAQ	9.44	10.4	1	25	8.5	208.33	14.4
SMDJ9.0AQ	SMDJ9.0CAQ	10	11.1	1	10	9	194.81	15.4
SMDJ10AQ	SMDJ10CAQ	11.1	12.3	1	5	10	176.47	17
SMDJ11AQ	SMDJ11CAQ	12.20	13.50	1	5	11.0	164.84	18.2
SMDJ12AQ	SMDJ12CAQ	13.30	14.70	1	2	12.0	150.75	19.9
SMDJ13AQ	SMDJ13CAQ	14.40	15.90	1	2	13.0	139.53	21.5
SMDJ14AQ	SMDJ14CAQ	15.60	17.20	1	1	14.0	129.31	23.2
SMDJ15AQ	SMDJ15CAQ	16.70	18.50	1	1	15.0	122.95	24.4
SMDJ16AQ	SMDJ16CAQ	17.80	19.70	1	1	16.0	115.38	26.0
SMDJ17AQ	SMDJ17CAQ	18.90	20.90	1	1	17.0	108.70	27.6
SMDJ18AQ	SMDJ18CAQ	20.00	22.10	1	1	18.0	102.74	29.2
SMDJ19AQ	SMDJ19CAQ	21.10	23.30	1	1	19.0	97.47	30.8
SMDJ20AQ	SMDJ20CAQ	22.20	24.50	1	1	20.0	92.59	32.4
SMDJ22AQ	SMDJ22CAQ	24.40	26.90	1	1	22.0	84.51	35.5
SMDJ24AQ	SMDJ24CAQ	26.70	29.50	1	1	24.0	77.12	38.9
SMDJ26AQ	SMDJ26CAQ	28.90	31.90	1	1	26.0	71.26	42.1
SMDJ28AQ	SMDJ28CAQ	31.10	34.40	1	1	28.0	66.08	45.4
SMDJ30AQ	SMDJ30CAQ	33.30	36.80	1	1	30.0	61.98	48.4
SMDJ33AQ	SMDJ33CAQ	36.70	40.60	1	1	33.0	56.29	53.3
SMDJ36AQ	SMDJ36CAQ	40.00	44.20	1	1	36.0	51.64	58.1
SMDJ40AQ	SMDJ40CAQ	44.40	49.10	1	1	40.0	46.51	64.5
SMDJ43AQ	SMDJ43CAQ	47.80	52.80	1	1	43.0	43.23	69.4
SMDJ45AQ	SMDJ45CAQ	50.00	55.30	1	1	45.0	41.27	72.7
SMDJ48AQ	SMDJ48CAQ	53.30	58.90	1	1	48.0	38.76	77.4

Notes:

- (4) Pulse Test: t<sub>p</sub>≤50ms
- (5) For bi-directional types having V<sub>RWM</sub> of 10 V and less, the IR limit is doubled.
- (6) Surge current waveform per Fig.3 and derated per Fig.2.
- (7) For the bi-directional SMDJ5.0CAQ, the maximum V<sub>BR</sub> is 7.25 V.



# SMDJ5.0AQ THRU SMDJ48CAQ

## ■ Characteristics(Typical)

Fig.1 Peak Pulse Power Rating Curve

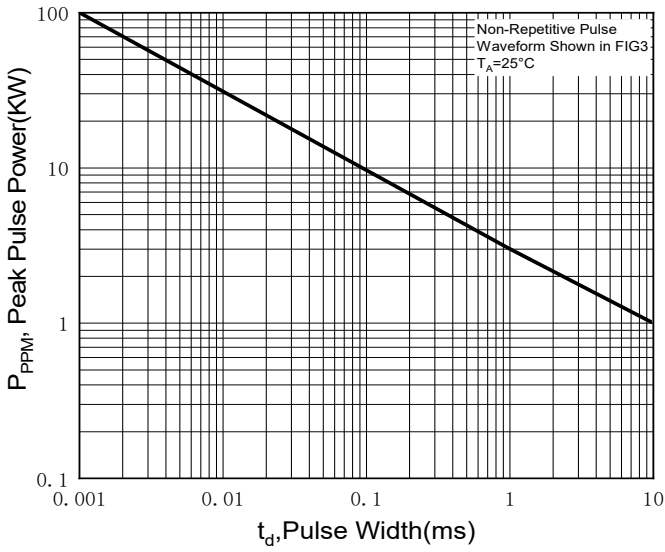


Fig.2 Pulse Power or Current vs. Initial Junction Temperature

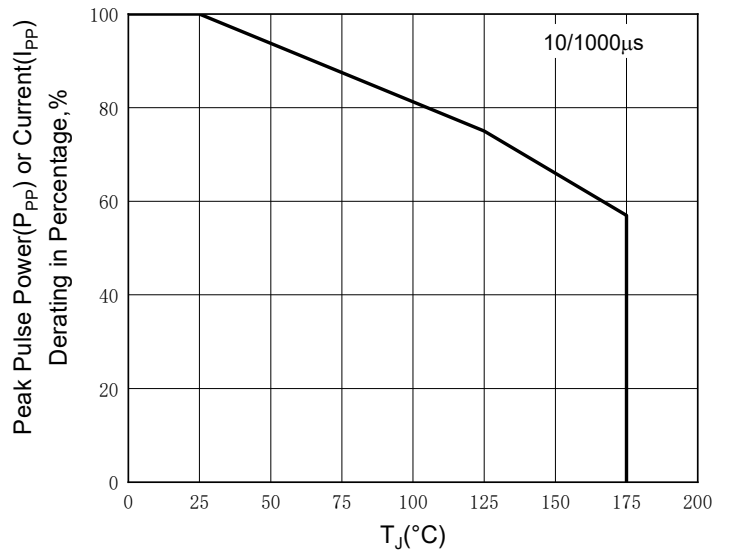


Fig.3 Pulse Waveform

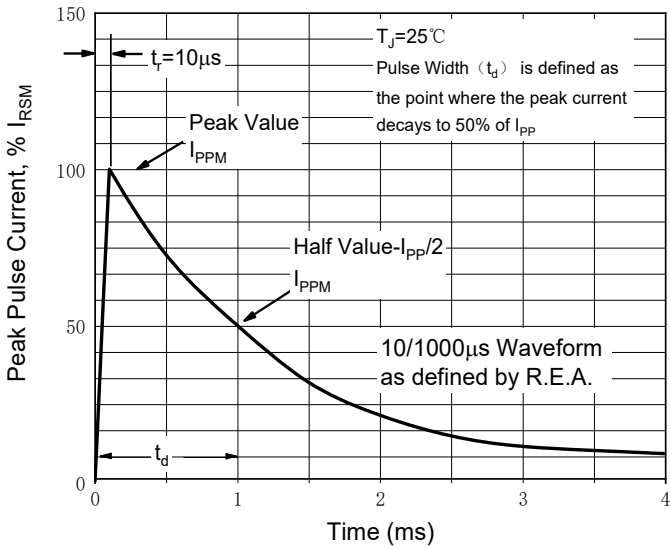


Fig.4 Typical Transient Thermal Impedance

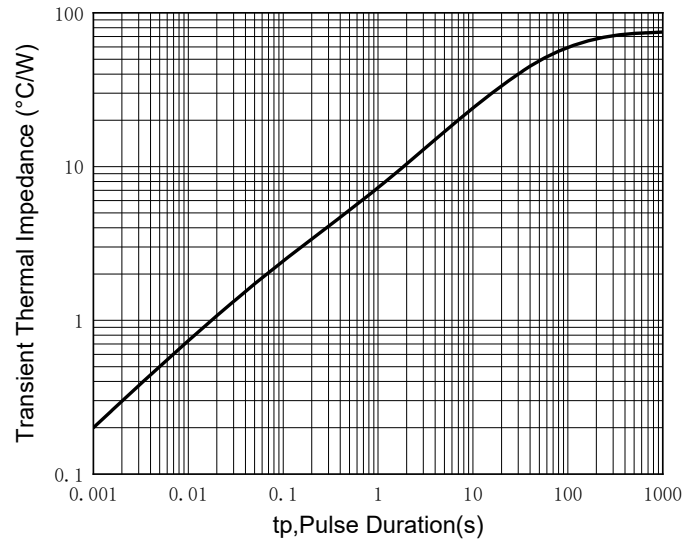


Fig.5 Maximum Non-Repetitive Forward Surge Current


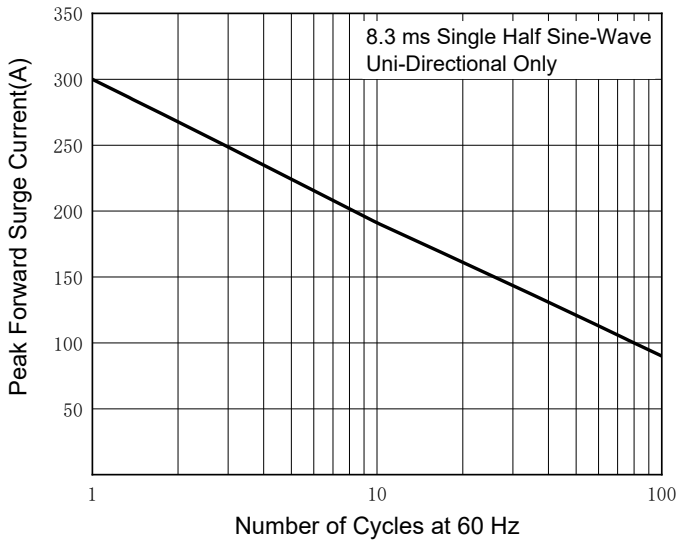



Fig.6 Steady State Power Derating Curve



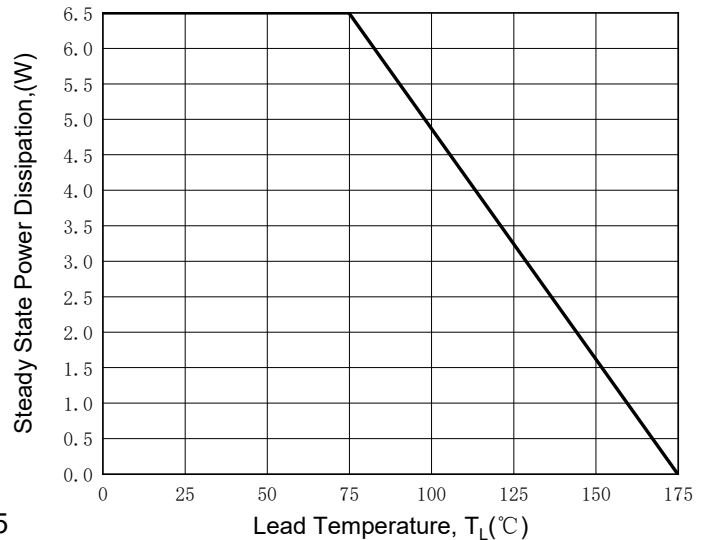

# SMDJ5.0AQ THRU SMDJ48CAQ

## ■ Marking Information

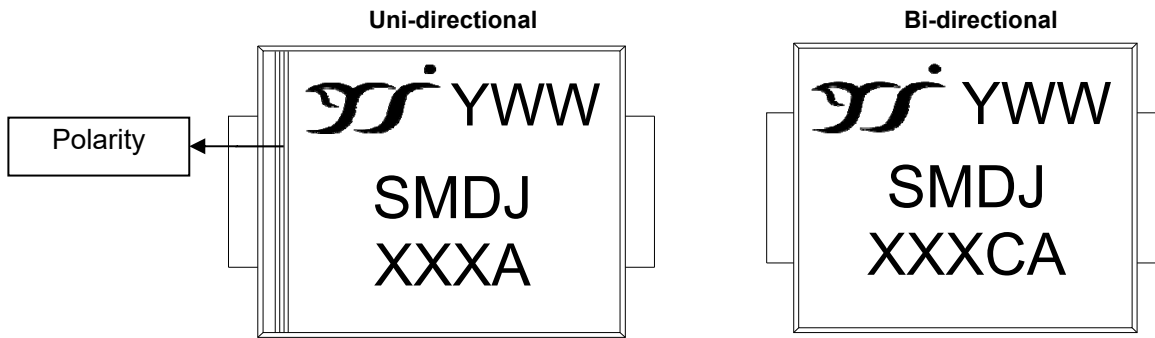


Note:

1. All marking is at middle of the product body
2. All marking is in laser printing
3. XXX is marking code, like 48A/48CA marking code is 48
4. Body color: Black
5. YWW is date code, "Y" is year. "WW" is week.


For instance:  
 The 17<sup>th</sup> week of 2021, date code is 117  
 The 17<sup>th</sup> week of 2022, date code is 217

## ■ Outline Dimensions

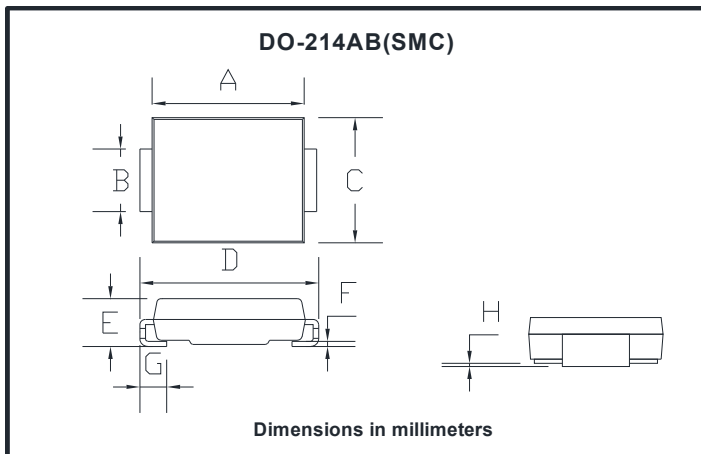

DO-214AB (SMC)		
Dim	Min	Max
A	6.60	7.11
B	2.85	3.27
C	5.59	6.22
D	7.75	8.13
E	1.99	2.61
F	0.15	0.31
G	0.76	1.52
H	0.05	0.20

## ■ Suggested pad layout

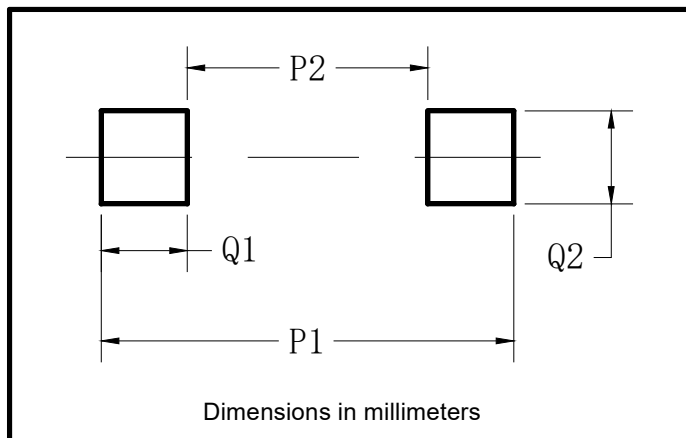

Dim	Typ
P1	9.9
P2	3.84
Q1	3.03
Q2	3.82



## SMDJ5.0AQ THRU SMDJ48CAQ

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Yangjie](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)