




## Thyristor Module

**V<sub>RRM</sub> / V<sub>DRM</sub>** 800 to 1800V  
**I<sub>TAV</sub>** 25A

### Applications

- Power Converters
- Lighting Control
- DC Motor Control and Drives
- Heat and temperature control

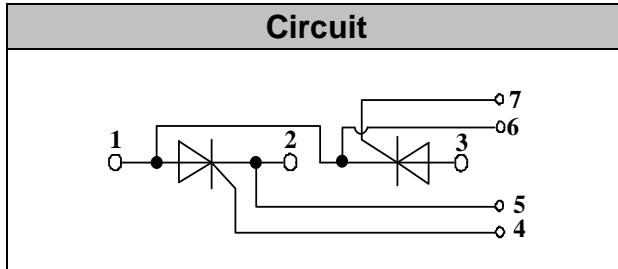

### Features

- International standard package
- High Surge Capability
- Glass passivated chip
- Simple Mounting
- Heat transfer through aluminum oxide DBC ceramic isolated metal baseplate
- UL recognized applied for file no. E360040

### Module Type

| TYPE      | V <sub>RRM</sub> | V <sub>RSM</sub> |
|-----------|------------------|------------------|
| MT25C08T1 | 800V             | 900V             |
| MT25C12T1 | 1200V            | 1300V            |
| MT25C16T1 | 1600V            | 1700V            |
| MT25C18T1 | 1800V            | 1900V            |

### Maximum Ratings

| Symbol           | Conditions   | Values       | Units            |
|------------------|--|--------------|------------------|
| I <sub>TAV</sub> | Sine 180°; T <sub>c</sub> =85°C  | 25           | A                |
| I <sub>TSM</sub> | T <sub>VJ</sub> =45°C t=10ms, sine<br>T <sub>VJ</sub> =125°C t=10ms, sine                          | 550<br>480   | A                |
| i <sup>2</sup> t | T <sub>VJ</sub> =45°C t=10ms, sine<br>T <sub>VJ</sub> =125°C t=10ms, sine                          | 1500<br>1150 | A <sup>2</sup> s |
| Visol            | a.c.50HZ;r.m.s.;1min   | 3000         | V                |
| T <sub>vj</sub>  |  | -40 to 125   | °C               |
| T <sub>stg</sub> |  | -40 to 125   | °C               |
| M <sub>t</sub>   | To terminals(M5)   | 3± 15%       | Nm               |
| M <sub>s</sub>   | To heatsink(M6)  | 5± 15%       | Nm               |
| di/dt            | T <sub>VJ</sub> = T <sub>VJM</sub> , 2/3V <sub>DRM</sub> ,I <sub>G</sub> =500mA<br>Tr<0.5us,tp>6us | 150          | A/us             |
| dv/dt            | T <sub>J</sub> = T <sub>VJM</sub> ,2/3V <sub>DRM</sub> linear voltage rise                         | 1000         | V/us             |
| a                | Maximum allowable acceleration   | 50           | m/s <sup>2</sup> |
| Weight           | Module(Approximately)  | 100          | g                |

### Thermal Characteristics

| Symbol               | Conditions                       | Values   | Units |
|----------------------|----------------------------------|----------|-------|
| R <sub>th(j-c)</sub> | Cont.;per thyristor / per module | 0.9/0.45 | °C/W  |
| R <sub>th(c-s)</sub> | per thyristor / per module       | 0.2/0.1  | °C/W  |



## Electrical Characteristics

| Symbol            | Conditions   | Values |      |      | Units      |
|-------------------|--|--------|------|------|------------|
|                   |  | Min.   | Typ. | Max. |            |
| $V_{TM}$          | $T=25^{\circ}C$ $I_{TM}=75A$                               |        |      | 1.8  | V          |
| $I_{RRM}/I_{DRM}$ | $T_{VJ}=T_{VJM}$ , $V_R=V_{RRM}$ , $V_D=V_{DRM}$           |        |      | 10   | mA         |
| $V_{TO}$          | For power-loss calculations only ( $T_{VJ}=125^{\circ}C$ ) |        |      | 0.9  | V          |
| $r_T$             | $T_{VJ}=T_{VJM}$   |        |      | 12   | m $\Omega$ |
| $V_{GT}$          | $T_{VJ}=25^{\circ}C$ , $V_D=6V$                            |        |      | 2.5  | V          |
| $I_{GT}$          | $T_{VJ}=25^{\circ}C$ , $V_D=6V$                            |        |      | 150  | mA         |
| $V_{GD}$          | $T_{VJ}=125^{\circ}C$ , $V_D=2/3V_{DRM}$                   |        |      | 0.25 | V          |
| $I_{GD}$          | $T_{VJ}=125^{\circ}C$ , $V_D=2/3V_{DRM}$                   |        |      | 5    | mA         |
| $I_L$             | $T_{VJ}=25^{\circ}C$ , $R_G=33\Omega$                      |        | 250  | 400  | mA         |
| $I_H$             | $T_{VJ}=25^{\circ}C$ , $V_D=6V$                            |        | 100  | 200  | mA         |
| tgd               | $T_{VJ}=25^{\circ}C$ , $I_G=1A$ , $di_G/dt=1A/us$          |        | 1    |      | us         |
| tq                | $T_{VJ}=T_{VJM}$   |        | 80   |      | us         |



### Performance Curves

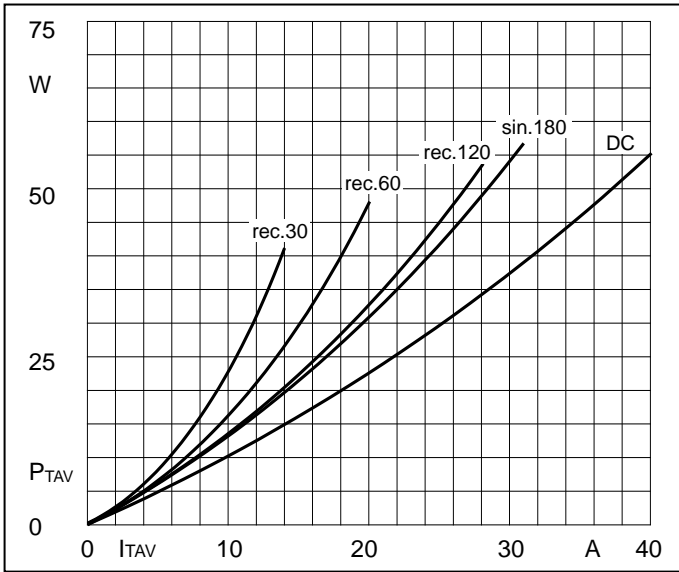


Fig1. Power dissipation

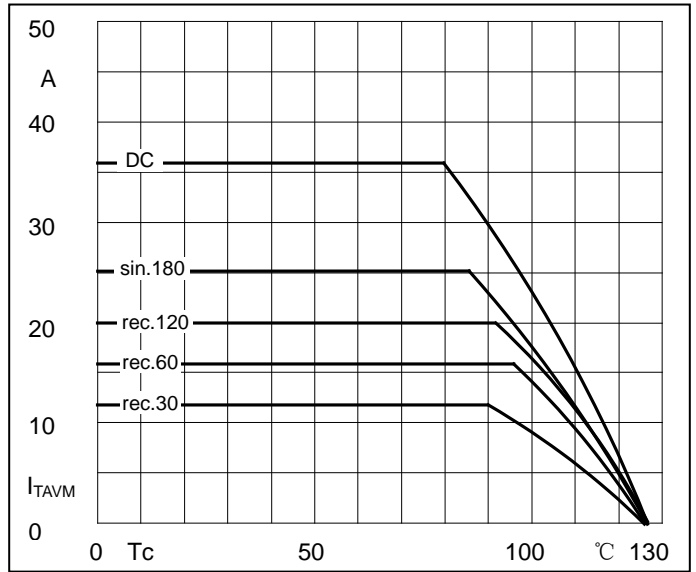


Fig2. Forward Current Derating Curve

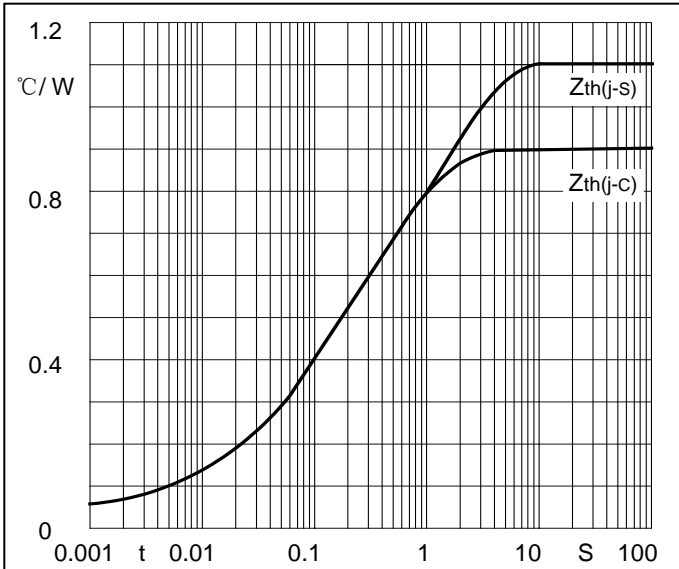


Fig3. Transient thermal impedance

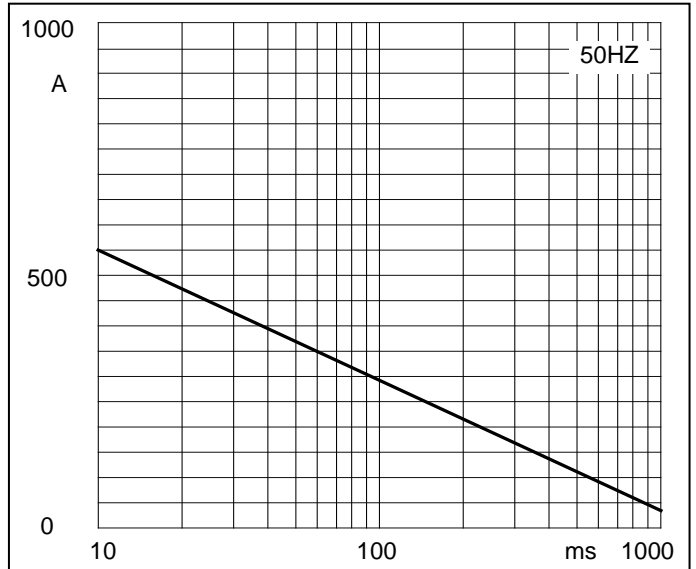


Fig4. Max Non-Repetitive Forward Surge Current

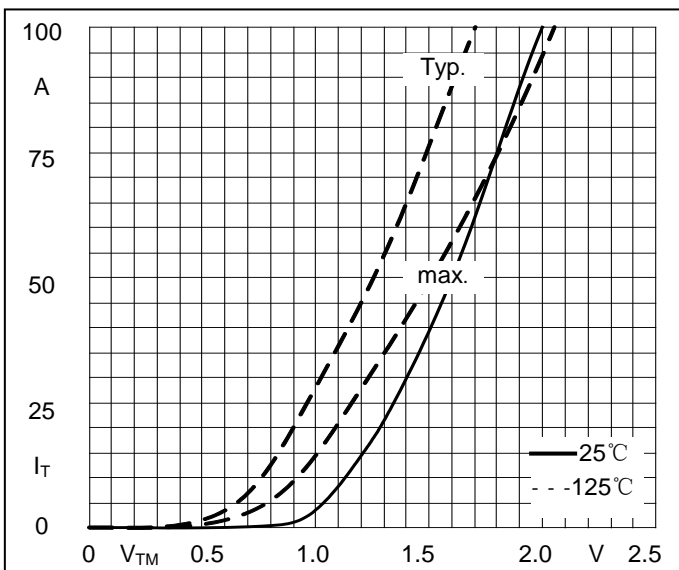


Fig5. Forward Characteristics



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SCR Modules](#) category:*

*Click to view products by [Yangjie](#) manufacturer:*

Other Similar products are found below :

[DT430N22KOF](#) [T1401N42TOH](#) [T1851N60TOH](#) [T390N14TOF](#) [T420N12TOF](#) [T470N16TOF](#) [T640N16TOF](#) [T901N36TOF](#) [TD140N18KOF](#)  
[TD142N16KOF](#) [TD162N16KOF-A](#) [TD250N12KOF](#) [TD330N16AOF](#) [TT215N22KOF](#) [TZ310N20KOF](#) [TZ425N12KOF](#) [TZ500N12KOF](#)  
[T300N14TOF](#) [T3710N06TOF](#) [VT](#) [T390N16TOF](#) [T460N24TOF](#) [T501N70TOH](#) [T560N16TOF](#) [T640N14TOF](#) [TD250N14KOF](#)  
[TT600N16KOF](#) [TZ500N16KOF](#) [TZ240N36KOF](#) [TT210N12KOF](#) [NTE5710](#) [TD180N16KOF](#) [TT240N28KOF](#) [TZ425N14KOF](#)  
[T1081N60TOH](#) [TT61N08KOF](#) [TD251N18KOF](#) [TT162N08KOF](#) [TZ430N22KOF](#) [TT180N12KOF](#) [T2001N34TOF](#) [TD140N22KOF](#)  
[MDMA200P1600SA](#) [TT180N16KOF](#) [VS-ST333C08LFM0](#) [VS-ST180C14C0L](#) [T1080N02TOF](#) [TD320N16SOF](#) [T360N22TOF](#)  
[TZ810N22KOF](#) [T2563NH80TOH](#)