

CRYSTAL OSCILLATOR

YSO110TR Wide Voltage



Applications

- Consumer Electronics
- Industrial Control
- IOT

Features

- Frequency range:1MHz-54MHz
- Ultra Small SMD seam sealed crystal oscillator units.
- Package Size: 1.6*1.2 , 2.0*1.6
2.5*2.0 , 3.2*2.5 , 5.0*3.2 , 7.0*5.0mm

Specifications

| | |
|--|---------------------------------------|
| Frequency Range | 1MHz to 54MHz, or specify |
| Supply Voltage | 1.8V~3.3V |
| Output Type | CMOS |
| Frequency Tolerance(at 25°C) | ±10ppm, ±20ppm, or specify |
| Output Load | 15pF |
| Operating Temperature Range | -40~+85°C, -40~+125°C, or specify |
| Storage Temperature Range | -55~+125°C |
| Frequency Versus Temperature Characteristics | ± 20ppm, ± 30ppm, ± 50ppm, or specify |
| Voltage Vol (Max.) / Vol (Min.) | VOH = 90%Vdd/VOL = 10%Vdd |
| Duty Cycle | 45~55% |
| Start-up Time | 3ms Max. |
| Rise Time/Fall Time | 4nS Max |
| Supply Current | See Below |
| Frequency Aging (at 25°C) | ±3 ppm / year Max. |

Current Consumption

| Power Dissipation Vcc=1.8~3.3V 15pF only | | | | |
|--|-----------------|----------------|---------------------|-----------|
| Supply Voltage (V) | 1.000~40.000MHZ | | 41.000~54.000MHZ | |
| | 7050/5032/3225 | 2520/2016/1612 | 7050/5032/3225/2520 | 2016/1612 |
| 1.8V | 4mA max | 4mA max | 9mA max | 10mA max |
| 2.5V | 4.5mA max | | 10mA max | |
| 3.3V | 5mA max | | 12mA max | |

Pin Dimension

| Pin | #1 | #2 | #3 | #4 |
|----------|-----------|-----|--------|-----|
| FUNCTION | Tri-state | GND | OUTPUT | VDD |

Pin Assignments



CRYSTAL OSCILLATOR

YSO110TR Wide Voltage




Dimensions and Patterns [unit:mm]

| Package Size – Dimensions (Unit: mm) | Recommended Land Pattern (Unit: mm) |
|--------------------------------------|-------------------------------------|
| <p>1.6*1.2mm</p> | |
| <p>2.0*1.6mm</p> | |
| <p>2.5*2.0mm</p> | |
| <p>3.2*2.5mm</p> | |

CRYSTAL OSCILLATOR


YSO110TR Wide Voltage

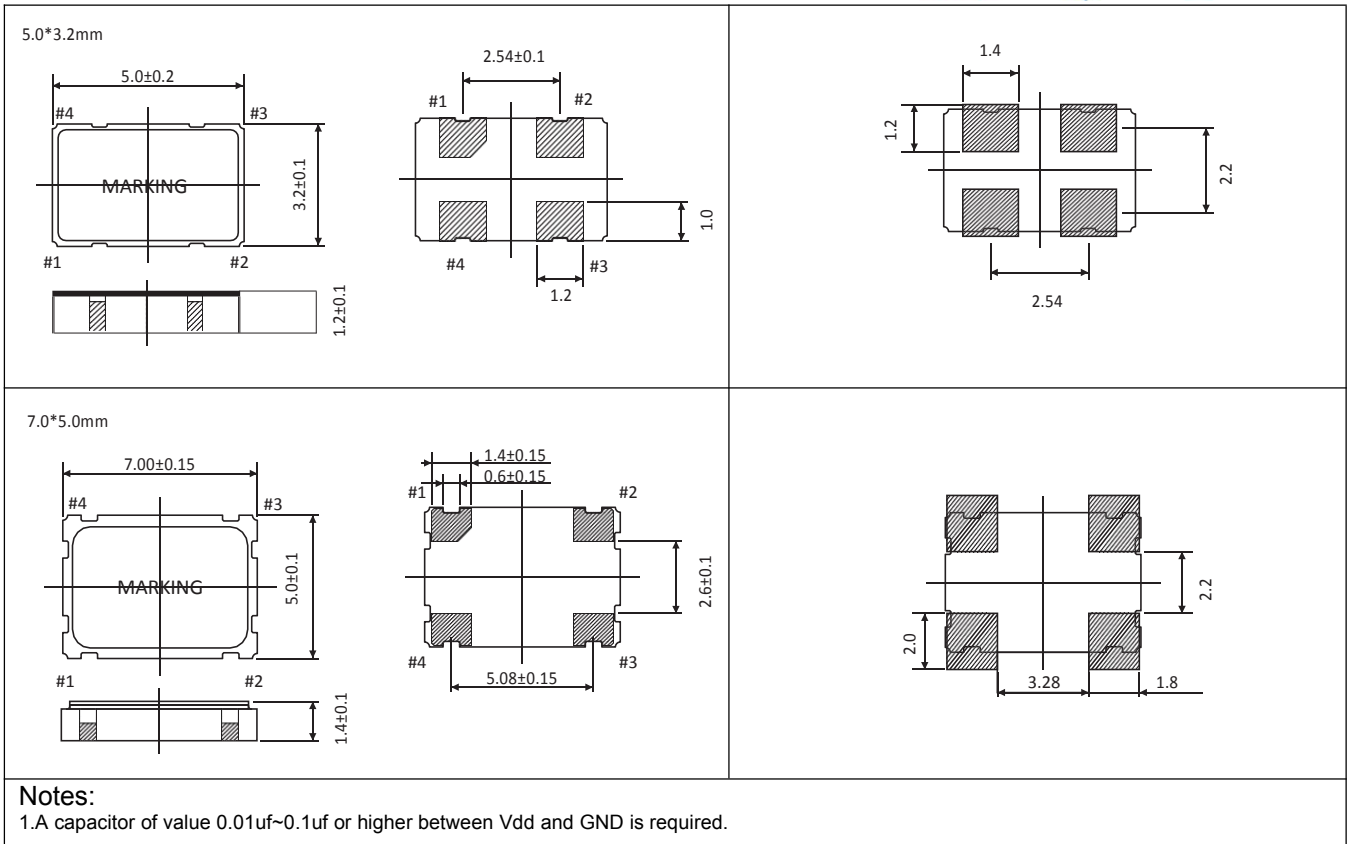

Reflow Soldering Profile

Pre Heating Temperature
 Tp1 ~ Tp2 = + 170 °C
 Heating Temperature
 TMI = + 220 °C
 Peak Temperature
 TMax. = + 260 °C

Point of measuring
 In case of Solder ability Terminal.
 In case of Resistance to soldering heat Surface.

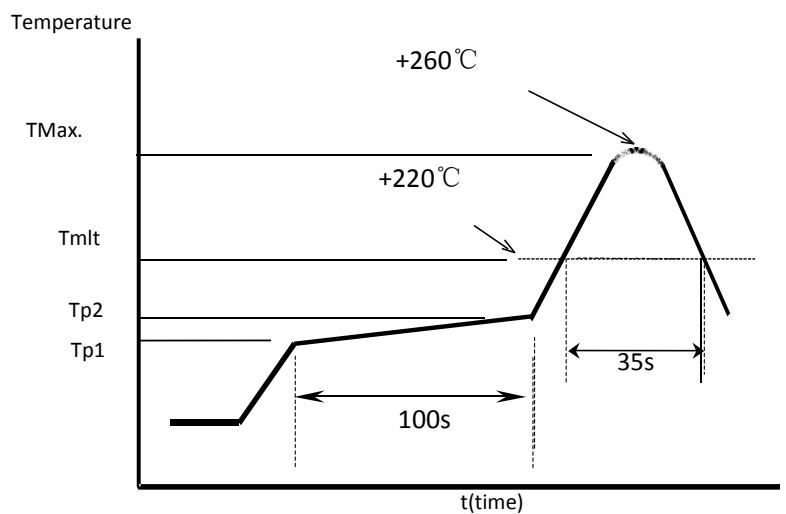

CRYSTAL OSCILLATOR

YSO110TR *Wide Voltage*



Test Circuit



Taping Specification(Unit: mm)



| Size(OSC) | A | B | C | D | E | F | G | H |
|-----------|---------|----------|----------|----------|---------|----------|----------|----------|
| SMD-7050 | 180±2.0 | 16.0±0.3 | 7.50±0.1 | 5.50±0.1 | 8.0±0.1 | 2.00±0.1 | 61.0±1.0 | 16.0±1.0 |
| SMD-5032 | 180±2.0 | 12.0±0.3 | 5.40±0.1 | 3.60±0.1 | 8.0±0.1 | 1.70±0.1 | 61.0±1.0 | 12.0±1.0 |
| SMD-3225 | 180±2.0 | 8.0±0.3 | 3.40±0.1 | 2.70±0.1 | 4.0±0.1 | 1.50±0.1 | 61.0±1.0 | 8.0±1.0 |
| SMD-2520 | 180±2.0 | 8.0±0.3 | 2.90±0.1 | 2.40±0.1 | 4.0±0.1 | 1.20±0.1 | 61.0±1.0 | 8.0±1.0 |
| SMD-2016 | 180±2.0 | 8.0±0.3 | 2.30±0.1 | 1.90±0.1 | 4.0±0.1 | 0.95±0.1 | 61.0±1.0 | 8.0±1.0 |
| SMD-1612 | 180±2.0 | 8.0±0.3 | 1.80±0.1 | 1.40±0.1 | 4.0±0.1 | 0.80±0.1 | 61.0±1.0 | 8.0±1.0 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Yangxing](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#)
[SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-24](#) [F535L-27](#) [PE7744DW-](#)
[100.0M](#) [ASF1-3.686MHZ-N-K-S](#) [ASV-4.000MHZ-LCS-T](#) [XLH735025.000JU4I8](#) [XLP725125.000JU6I8](#) [XO57CTECNA3M6864](#) [601251](#)
[SiT8503AI-18-33E-0.200000X](#) [SIT8918AA-11-33S-16.000000G](#) [SIT9122AI2C233E300.000000X](#) [XO37CTECNA20M](#) [9120AC-2D2-](#)
[33E212.500000](#) [9102AI-243N25E100.000000](#) [8208AC-82-18E-25.000000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-](#)
[4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [632L3I004M00000](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-](#)
[25E100.000000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.000000](#) [9102AI-232H25S125.000000](#) [9102AI-133N25E200.000000](#) [9102AC-](#)
[283N25E200.000000](#) [9001AC-33-33E1-30.0000](#) [8103AC-13-33E-12.00000X](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [XUN736000.032768I](#)
[EC3925ETTTTS-100.000M TR](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#)