

## 特征 Features

宽阻值范围	Wide resistance range
电流能力3-25安培	Through current 3-25A
精度±10%, ±5%和±2%	Tolerance ±10%, ±5% and ±2%
电阻温度系数低至±40ppm/°C	TCR down to ±40ppm/°C
符合RoHS、REACH要求	RoHS and REACH compliant
特殊规格可以订做	Customizable

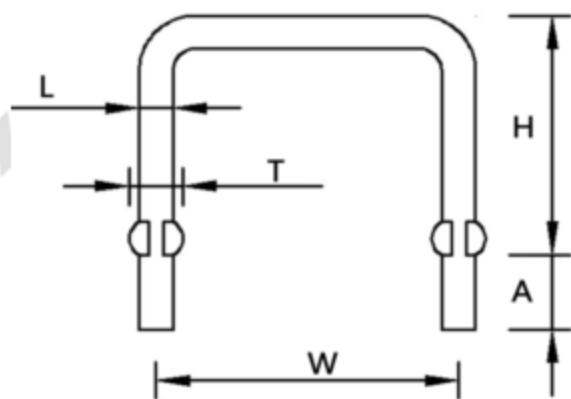


## 应用范围 Applications

电流采样	Current Sensing
驱动技术	Drive technology
工业电子	Industrial electronics
家用电器	Household Electric Appliances
电源产品	Power supply products

## 标准尺寸规格 Standard Size

L/mm	W/mm	H/mm	A/mm	T/mm
0.5~3.0	5~30	5~30	3.5±0.2	0.75~3.3




订货提供  
1.线径或板孔大小 “L”  
2.额定电流  
3.跨距 “W”  
4.高度范围 “H”

NOTE:  
Contact YeZhan for:  
1.Variations of “L”  
2.Rated current  
3.Variations of “W”  
4.Variations of “H”

常规压脚 (Y) 采样电阻线径、常规跨距及阻值 (mΩ) 对照表Type Data

线径/mm	过电流/A	跨距/mm 阻值可选范围/mΩ					
		5	10	15	20	25	30
0.5	3	30~160	45~175	60~190	75~205	90~220	105~235
0.6	4	25~110	35~120	45~130	55~140	65~150	75~160
0.7	5	15~80	22~87	29~94	35~100	42~107	49~114
0.8	5.5	12~60	17~65	22~70	28~75	33~80	39~85
0.9	6	10~48	14~52	18~56	22~60	26~64	30~68
1.0	7	7.5~38	11~41	14~43	18~46	21~49	24~52
1.1	7.5	6~32	9~35	12~37	15~40	18~43	21~47
1.2	8	5~25	7.5~28	10~31	12.5~34	15~37	18~40
1.3	8.5	4.5~23	6.5~25	8.5~27	11~29	13~31	15~33
1.4	9	3.5~19	5.5~21	7~23	9~25	11~27	13~29
1.5	9.5	3~16	4.5~17	6~28	7.5~20	9~23	11~24
1.6	10	/	4~15	5.5~17	6.5~19	8~21	10~23
1.8	12	/	3.5~12	4.5~13	5.5~14	6.5~15	7.5~17
2.0	15	/	3~9.5	3.5~11	4.5~12	5.5~13	6~14
2.3	18	/	2.2~7.5	2.8~8	3.5~8.5	4~9	4.8~10
2.5	20	/	1.8~6.5	2.3~7	2.8~7.5	3.3~8	3.8~8.5
3.0	25	/	1~4	1.3~4.3	1.6~4.6	1.9~4.9	2.2~5.2










## 订购信息 Ordering Information

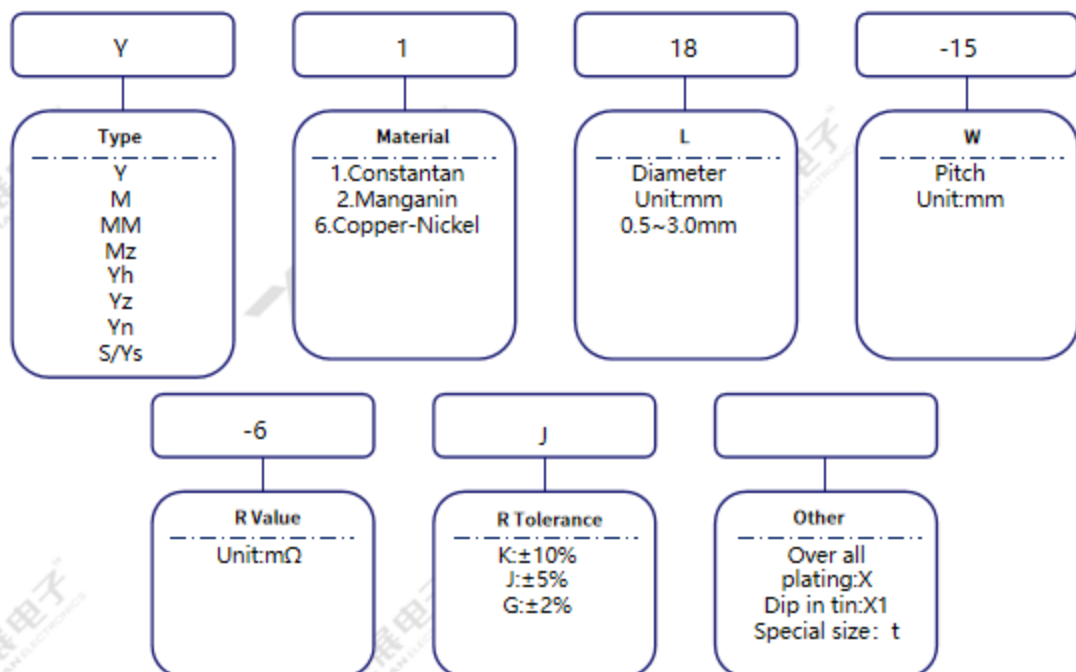

# 压脚型采样电阻-YSR系列


## Pressure Foot Type Sampling Resistor -YSR Series

代号 Symbol	材料 Materials	电阻率 Resistance Rate
2	锰铜 Manganin	$44\mu\Omega \cdot \text{cm}$
1	康铜 Constantan	$48\mu\Omega \cdot \text{cm}$
6	铜镍 Copper-Nickel	$30\mu\Omega \cdot \text{cm}$


代号 Symbol	示例图 Sample graph	代号 Symbol	示例图 Sample graph
Y		M	
MM		Mz	
Yh		Yz	
Yn		Ys	
S			

## 工作特性 Performance Data

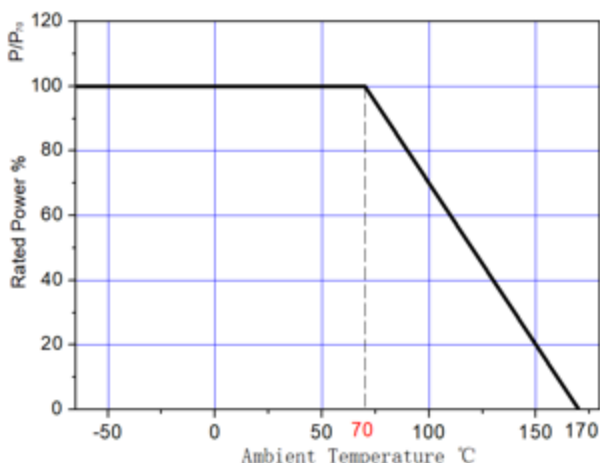降功率曲线 Power Derating



温度系数曲线 TCR Derating

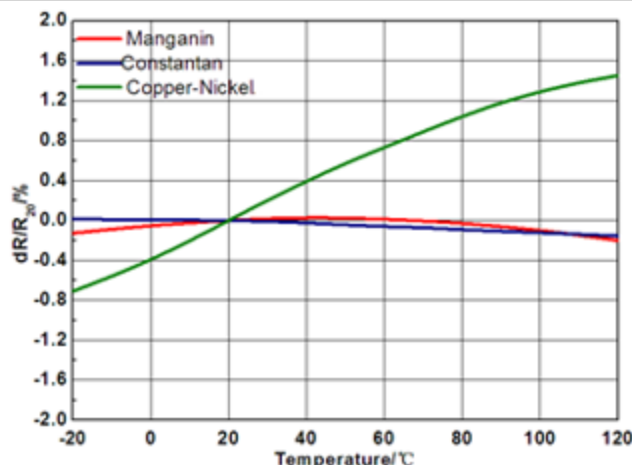

TCR (ppm/°C) : Test conditions at 20°C~120°C.

## 产品尺寸和性能 Product Size And Performance

项目 Items	参数 Parameters
材料 Material	康铜 Constantan
图解 Diagrammatize	
A	3.5mm±0.5mm
H	10mm±2mm
W	15mm±0.5mm
T	2.5mm±0.2mm
L	1.8mm±0.1mm

阻值 Value	6mΩ±5%
过电流 overcurrent	12A
使用温度 Operating Temperature	-65°C ~ 170°C

## » 耐久性测试 Endurance Test

Items	Additional Requirements	Reference	Limits
Operational Life	70±2°C, 1000h Rated voltage (90 min ON, 30 min OFF)	MIL-STD-202 Method 108	±1%
Biased Humidity	1000hrs 85°C/85%RH. Note:Specified conditions:10% of operating power.	MIL-STD-202 Method 103	±1%
Temperature Cycling	1000 Cycles(-55°C to +125°C)	JESD22 Method JA-104	±1%
Solderability	245°C±5°C, 5s±0.5s	J-STD-002C	95% Coverage Minimum
Short Time Overload	5×Rated power for 5 s	MIL-STD-202 Method 301	±1%
Resistance to Soldering Heat	260°C±5°C, 10s±1s	MIL-STD-202 Method 210	±0.5%
Vibration	(10 - 2000 Hz) ,5 g's for 20 min, 12 cycles each of 3axis.	MIL-STD-202 Method 204	±0.5%

## » 包装Packaging

散装, 内外双包装 Bulk, Internal And External Package

## » 版本信息 Version History

版本 Version	日期 Date	修订描述 Description of amendment	拟定 Draft	审核 Checked
A1.0	21-Sep-2022	首版发行	张雅兰	胡紫阳
A1.1	10-May-2023	增加代码图片	张雅兰	胡紫阳

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Current Sense Resistors - SMD category](#):*

*Click to view products by [Yezhan manufacturer](#):*

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [PFS35-200RF1](#) [CD2015FC-0.10-1%](#) [PR2512FKF7W0R004L](#) [RC1005F124CS](#) [CSNL2512FT5L00](#)

[RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R020-F](#) [LRC-LR2512LF-01-R820J](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#)

[RL7520WT-R002-F](#) [RL7520WT-R005-F](#) [KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [Y14880R02000B9R](#) [RLP73M2AR075FTDF](#)

[SR731ERTTP5R10F](#) [SR731ERTTP100J](#) [SR731ERTTP6R80F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#) [SR731ERTTP2R0J](#)

[SR731ERTTP4R7J](#) [SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#) [SR731ERTTP9R10F](#)

[FCSL64R007JER](#) [73L4R10G](#) [73L4R75G](#) [73L4R33G](#) [73M1R051F](#) [73WL4R020J](#) [73L2R68J](#) [73L2R22J](#) [73L2R33J](#) [CC1512FC-0.015-5%](#)

[ULRG2-2512-R0075-F-LF-SLT](#) [KDV08DR220ET](#) [KDV12DR240ET](#) [SLN3TTED80L6F](#) [JW104X15X4](#) [JW105X19X5](#) [HVR06FTEV2403](#)

[JW104X5X4](#)