

合金电流采样贴片电阻

Low Resistance Metal Strip Chip Resistors



深圳市业展电子有限公司

规格书

SPECIFICATION FOR PRODUCT

Customer P/N _____

产品名称

Product Name Ultra Low Ohm Chip Resistors – YLR Series

产品规格

Product Type _____

申请承认日期

版本

Apply Date 2020-07-09 REV. 1.0

供货商属性 代理商 制造商 深圳市业展电子有限公司

Vendor Type Agency Manufacturer

Note: 禁止使用 1 级环境管理物质.遵守 ACBEL"环境管理物质规范"中所要求之含量标准.

Restrict use of hazardous substances of level 1; Comply with "Specification for Hazardous Substances and Materials Management" of ACBEL

供货商印鉴 Vendor Stamp	APPROVED	CHECKED	PREPARED	承认印鉴 Stamp

Mainland China: 深圳市业展电子有限公司

Shenzhen Yezhan Electronics Co., Ltd.

Add: 深圳市龙华区环观中路荣倡工业园 7 栋 4 楼

Tel: 0755-26517682-8018/ 18926048203

Fax: 0755-29500756

E-mail: caixiaojuan@yezhan.com.cn

业展电子

YEZHAN ELECTRONICS

Confidential and Proprietary To Shenzhen Yezhan electronics all right


1

reserved

Tel: +86-0755-26517682-8018/18926048203 Fax: 0755-29500756 E-mail: caixiaojuan@yezhan.com.cn

Http: www.yezhan.com.cn

YLR Series

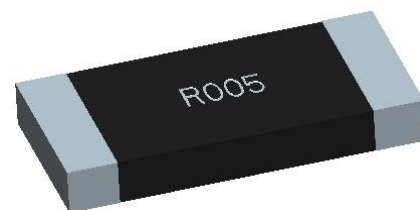

★ 特征 Features

- 焊接结构产品设计 Welded construction product
- 阻值范围 Resistance range 1~150mR
- 额定功率 Rated power 1~5W
- 低寄生感值设计 Low inductance design
- 合金材质，耐冲击 Alloy Material, Shock Resistance
- 工作温度范围 Operating temperature range : -65°C~170°C
- AEC-Q200 qualified

★ 用途 Applications

- 电流取样 Current sensing application
- 过流保护 Over current protection
- 伺服电机控制电路 Servo motor control circuits
- 变频电源 Inverter power
- 电子控制系统 Electric control system
- 锂电池控制板 Li-battery management system

业展电子
YEZHAN ELECTRONICS

Confidential and Proprietary To Shenzhen Yezhan electronics all right

2

reserved

Tel:+86-0755-26517682-8018/18926048203 Fax: 0755-29500756 E-mail:caixiaojuan@yezhan.com.cn

Http:www.yezhan.com.cn

合金电流采样贴片电阻

Low Resistance Metal Strip Chip Resistors

(1) 订购信息 Ordering Information

YLR	12	-3	-10	F
类型 Type	封装 Size	功率 Power	阻值 Resistance	精度 Tolerance
YLR	06 : 1206 12 : 2512 17 : 2817 28 : 2728 37 : 3637 20 : 4320	Unit : W	Unit : mΩ	J : ±5% G : ±2% F : ±1% D : ±0.5%

业展电子
YEZHAN ELECTRONICS

Confidential and Proprietary To Shenzhen Yezhan electronics all right

3

reserved

Tel: +86-0755-26517682-8018/18926048203 Fax: 0755-29500756 E-mail: caixiaojuan@yezhan.com.cn

Http: www.yezhan.com.cn

合金电流采样贴片电阻

Low Resistance Metal Strip Chip Resistors

(2) 标准电气规范 Standard Electrical Specifications

尺寸 Size	功率 ⁽¹⁾ Power(W)		阻值 Resistance/m Ω	温漂 TCR (ppm/°C)	材料 Material	工作温度 Operating Temperature (°C)
	P70°C	P120°C	±0.5%, ±1%, ±2%, ±5%			
1206	1, 2	/	1~30	±50	Manganin	-65°C~170°C
2512	2, 3	/	1~4	±75		
			5~150	±50		
2817	4, 5	/	1~4	±75		
			5~100	±50		
2728	5	/	1~2	±75		
			3~100	±50		
3637	5	/	1~2	±75		
			3~100	±50		
4320	/	5	5~20	±50		


Note : (1) 各种尺寸产品在不同环境温度下额定功率试验陆续验证中。Products of different sizes are being verified by power rating tests at other ambient temperatures.

业展电子
YEZHAN ELECTRONICS

合金电流采样贴片电阻

Low Resistance Metal Strip Chip Resistors

(3) 产品尺寸和推荐焊盘尺寸 Products & Recommend Pad Dimension

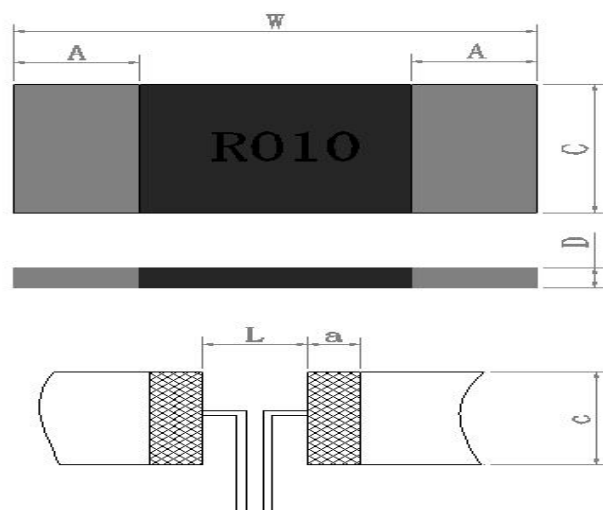

Unit : mm

Type	Resistance	W±0.2	C±0.2	A±0.2	D±0.1	L	a	c
1206	1	3.2	1.6	1.1	0.8	1.0	2.3	1.8
	2~100			0.5				
2512	1~4	6.35	3.2	2	0.8	1.3	3.1	4
	5~200			0.9				
2817	1~4	7.1	4.3	1.2	0.8	3.5	2.7	5.2
	5~100							
2728	1~2	6.8	7.2	1.2	1.0	2	4.0	7.8
	3~100				0.8			
3637	1~2	9.14	9.4	3.4	0.8	2	4.0	9.9
	3~100			2.2				
4320	5~20	11.0	5.0	2.36	0.8	5.0	14	5.75

业展电子

YEZHAN ELECTRONICS

Confidential and Proprietary To Shenzhen Yezhan electronics all right

5

reserved

Tel:+86-0755-26517682-8018/18926048203 Fax: 0755-29500756 E-mail:caixiaojuan@yezhan.com.cn

Http:www.yezhan.com.cn

(4) 字码 Marking


- 激光字码 ; Laser Marking
- All the products marking are 4 digits
- 'R' designates the decimal location in ohms

e.g. $3\text{m}\Omega = \text{R003}$

$100\text{m}\Omega = \text{R100}$

- 标准品为激光字码，如需白色丝印字码，请咨询业展销售团队。Laser marking is default. If need white printed marking, pls contact Yezhan sales team.

(5) 焊接结构图 Welded Construction

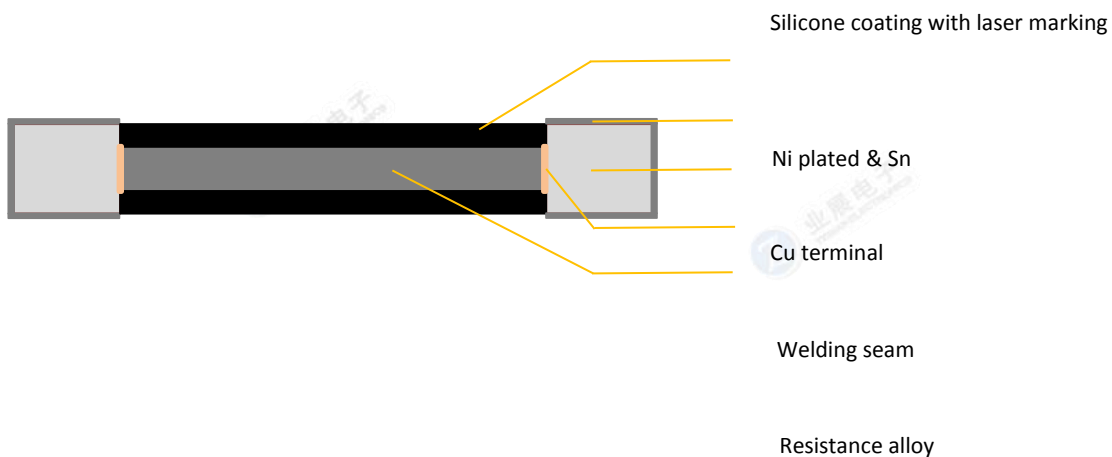

合金电流采样贴片电阻

Low Resistance Metal Strip Chip Resistors

(6) 性能参数 Performance Characteristics

Items	Additional Requirements	Reference	Limits
Temperature Cycling	1000 Cycles (-55°C to +150°C)	JESD22 Method JA-104	±0.5%
High Temperature Exposure	1000hrs.@T=125°C.Unpowered.	MIL-STD-202 Method 108	±0.5%
Moisture Resistance	t=24hrs/cycle.Note: Steps 7a & 7b not required. Unpowered.	MIL-STD-202 Method 106	±0.5%
Biased Humidity	1000hrs 85°C/85%RH. Note: Specified conditions:10% of operating power.	MIL-STD-202 Method 103	±0.5%
Operational Life	Condition D Steady State TA=125°C at rated power.	MIL-STD-202 Method 108	±0.5%
Thermal Shock	1000X(-55°C to +150°C)	MIL-STD-202M ethod107G	0.5%
Solderability	235°C±5°C,2s±0.5s	J-STD-202	95% Coverage Minimum
Resistance to Soldering Heat	260°C±5°C , 10s±1s	MIL-STD-202 Method 210	±0.5%
Short Time Overload	5×Rated power for 5 s	MIL-STD-202 Method 201	±0.5%
Shock	100g , 6ms , axes Z and Y , 10 Shocks per axis	MIL-STD-202 Method 213	0.5%
VIBRATION	(10 - 2000 HZ) , 20g @0.1ms	MIL-STD-202M ethod204	0.5%

业展电子

YEZHAN ELECTRONICS

Confidential and Proprietary To Shenzhen Yezhan electronics all right


7

reserved


Tel:+86-0755-26517682-8018/18926048203 Fax: 0755-29500756 E-mail:caixiaojuan@yezhan.com.cn

Http:www.yezhan.com.cn

(7) 降功率曲线 Power Derating Curve

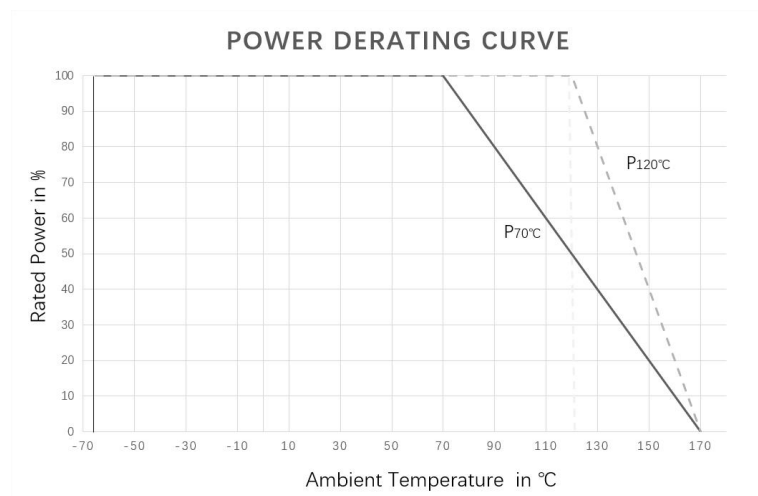

(8) 瞬间脉冲能力曲线图 Pulse Capability Curve

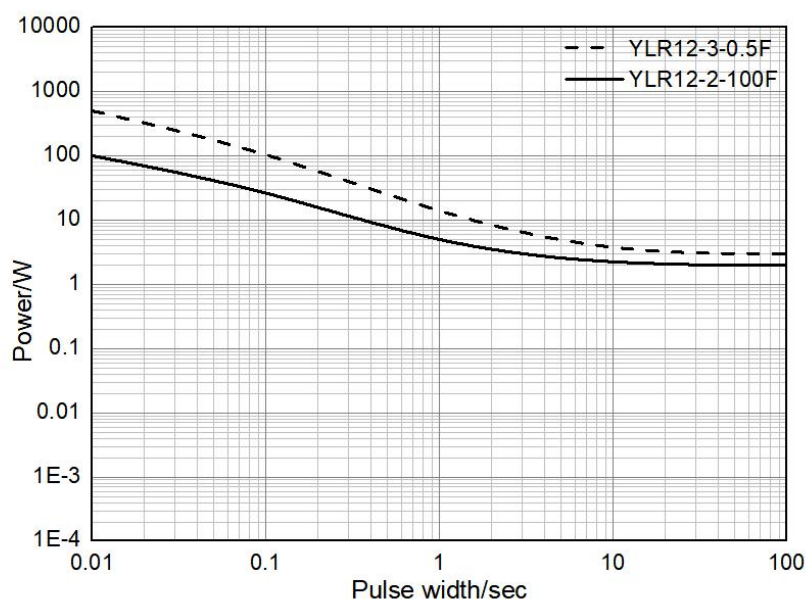


合金电流采样贴片电阻

Low Resistance Metal Strip Chip Resistors

(9) 包装 Packing

储藏条件 Storage Conditions: Temperature:5°C~35°C, Humidity:40%~75%

编带盘装 : Embossed Plastic Tape

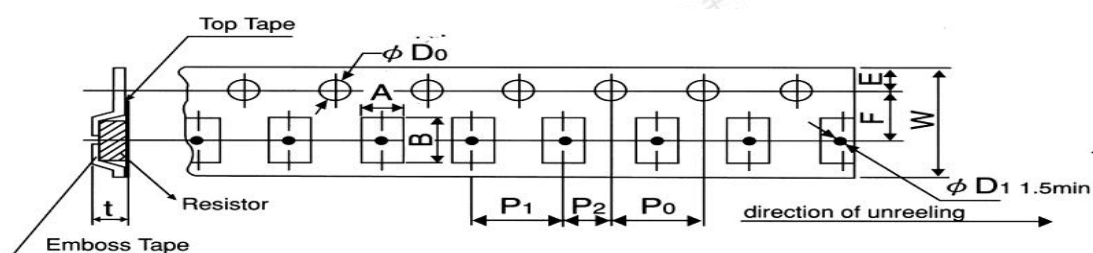

Type	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	t	Qty/reel
YLR06	2.0	3.6	8	3.5	1.7	4	2.0	4.0	Φ1.5	0.84	5000
YLR12	3.6	6.9	12	5.5	1.75	4	2.0	4.0	Φ1.5	1.2	3000
YLR17	4.8	7.2	16	7.5	1.75	6	2.0	4.0	Φ1.5	1.2	1500
YLR28	7.2	7.7	16	5.5	1.75	8	2.0	4.0	Φ1.5	1.2	1000
YLR37	9.8	9.6	24	11	1.75	12	2.0	4.0	Φ1.5	1.2	1000
YLR20	5.3	11.3	24	11.5	1.75	12	2.0	4.0	Φ1.5	1.2	3000

业展电子

YEZHAN ELECTRONICS

Confidential and Proprietary To Shenzhen Yezhan electronics all right

9

reserved

Tel:+86-0755-26517682-8018/18926048203 Fax: 0755-29500756 E-mail:caixiaojuan@yezhan.com.cn

Http:www.yezhan.com.cn

合金电流采样贴片电阻

Low Resistance Metal Strip Chip Resistors

(9) 版本 Version

Version	Date	Description of amendment	Remarks
1	09-Jul-2020	First issue for this specification	



业展电子

YEZHAN ELECTRONICS

Confidential and Proprietary To Shenzhen Yezhan electronics all right

10

reserved

Tel: +86-0755-26517682-8018/18926048203 Fax: 0755-29500756 E-mail: caixiaojuan@yezhan.com.cn

Http: www.yezhan.com.cn

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category](#):

Click to view products by [Yezhan manufacturer](#):

Other Similar products are found below :

[5112](#) [65709-330JE](#) [PF2512FKF7W0R007L](#) [PR2512FKF7W0R003L](#) [PR2512FKF7W0R005L](#) [RCWL0603R500JNEA](#) [ERJ-3BQF1R1V](#) [ERJ-L14UJ42MU](#) [2-2176088-5](#) [PF2512FKF7W0R006L](#) [PF2512FKF7W0R033L](#) [2-2176089-4](#) [CD2015FC-0.10-1%](#) [PR2512FKF7W0R004L](#) [CGSSL1R01J](#) [RC1005F124CS](#) [RCWE2512R110FKEA](#) [RCWL0805R330JNEA](#) [RL73H3AR47FTE](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [RLP73N1ER43JTD](#) [TL3AR01FTDG](#) [TLR3A20DR0005FTDG](#) [LRC-LR2512LF-01-R820J](#) [ERJ-3BQF4R3V](#) [ERJ-L14UF68MU](#) [TLR3A20DR001FTDG](#) [TLR3A30ER0005FTDG](#) [WR06X104JGLJ](#) [RLP73K1ER82JTD](#) [TL2BR01F](#) [TLR3A20DR01FTDG](#) [WSR3R0600FEA32](#) [ERJ-14BQF1R6U](#) [ERJ-14BQJR30U](#) [SP1220RJT](#) [SP1R12J](#) [ERJ-14BQF6R2U](#) [RL7520WT-R039-G](#) [PF1206FRF7W0R02L](#) [RL7520WT-R002-F](#) [RL7520WT-R047-F](#) [RLP73N2BR068FTDF](#) [RL7520WT-R005-F](#) [RCWE2512R220FKEA](#) [RCWE120625L0FMEA](#) [RCWE1206R150FKEA](#)