

SCHOTTKY BARRIER DIODE

FEATURES

- ◆ Low Forward Voltage Drop
- ◆ Guard Ring Construction for Transient Protection
- ◆ Negligible Reverse Recovery Time
- ◆ Low Capacitance
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- ◆ Case: SOD-323
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 5.48mg / 0.00019oz

Pinning	
1.Cathode	2.Anode
1	2
SOD-323	

Marking Code	
1N5819WS	S4
1N5818WS	S5
1N5817WS	S6

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter		Symbols	1N5819WS	1N5818WS	1N5817WS	Units	
Peak Repetitive Reverse Voltage		V _{RRM}	40	30	20	V	
RMS reverse voltage		V _{RMS}	28	21	14	V	
Working Peak Reverse Voltage		V _{DC}	40	30	20	V	
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load(JEDEC method)	I _{FSM}			13		A	
Maximum Instantaneous Forward Voltage	I _F =20mA	V _F	0.37			V	
	I _F =200mA		0.60				
Power Dissipation		P _D	200			mW	
Reverse current	1N5819WS, V _R =30V	I _R	5	-	-	uA	
	1N5818WS, V _R =20V		-	5	-		
	1N5817WS, V _R =10V		-	-	5		
Thermal Resistance, Junction to Ambient Air		R _{θJA}	300			°C/W	
Reverse voltage I _R =100uA	1N5819WS	V _{(BR)R}	40			V	
	1N5818WS		30				
	1N5817WS		20				
Reverse recovery time I _F =I _R =200mA, I _{RR} =0.1xI _R , R _L =100Ω		T _{rr}	10			nS	
Forward Continuons Current		I _{FM}	350			mA	
Total capacitance V _R =0V, f=1MHZ		C _{tot}	50			pF	
Junction temperature		T _j	125			°C	
Storage temperature		T _{stg}	-55 ~ +150			°C	

Fig.1 Power Derating Curve

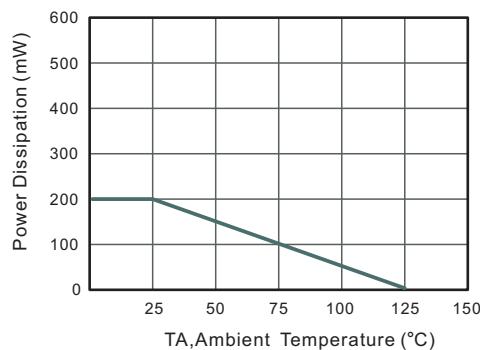


Fig.2 Typical Reverse Characteristics

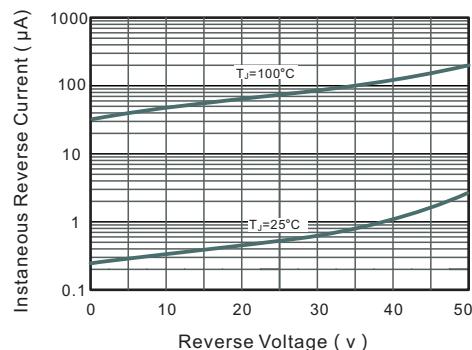


Fig.3 Forward Characteristics

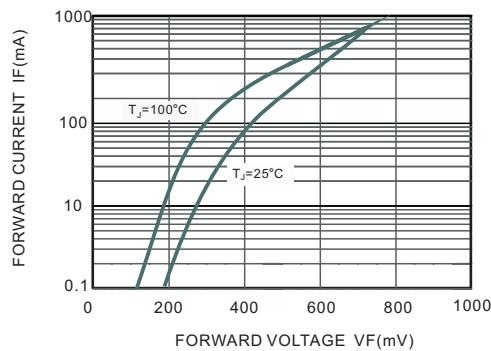


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

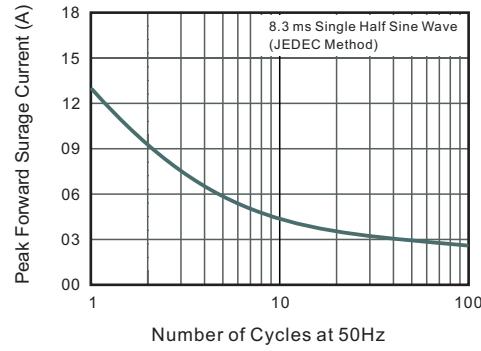


Fig.5 Typical Junction Capacitance




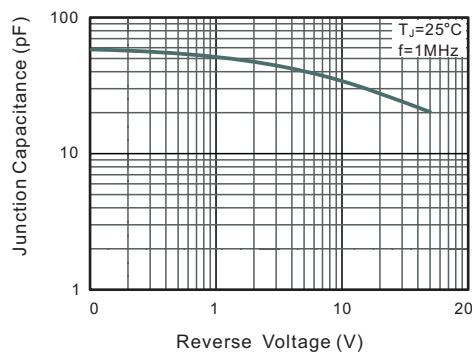


Fig.6 Typical Transient Thermal Impedance

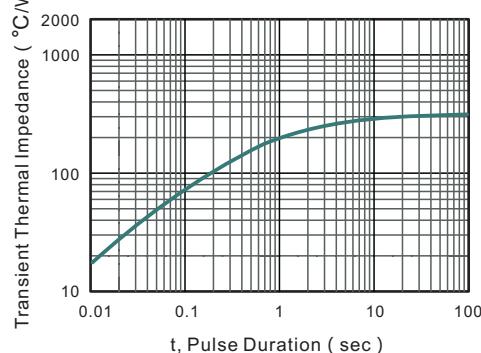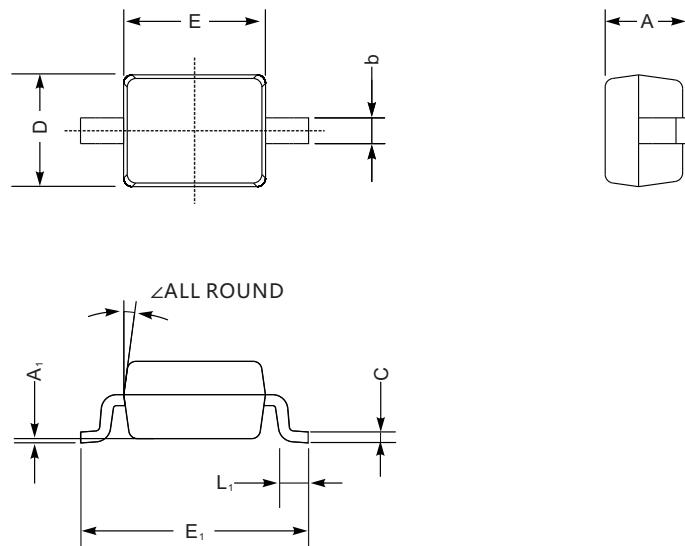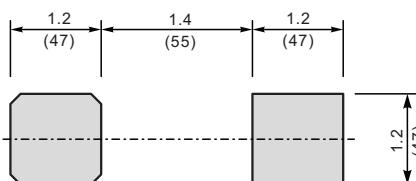

Package Outline
SOD-323
Plastic surface mounted package; 2leads


UNIT		A	C	D	E	E_1	b	L_1	A_1	\angle
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	9°
	min	32	3.1	47	63	100	9.8	7.9	—	

The recommended mounting pad size

Unit: $\frac{\text{mm}}{(\text{mil})}$
Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
SOD-323	Tape/Reel, 7" reel	3000	EIA-481-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by YFW Electronics manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [JANTX1N5712-1](#) [SB007-03C-TB-E](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [10BQ060-M3/5BT](#) [NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#) [B0530WSQ-7-F](#) [PDS1040Q-13](#)