


**Standard Silicon Rectifiers**

**Reverse Voltage - 1000 V**

**Forward Current - 20 A**

**FEATURES**

- ◆ Low cost . Diffused junction
- ◆ Low Leakage
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ Easily cleaned with Freon. Alcohol. Isopropanol and similar solvents
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

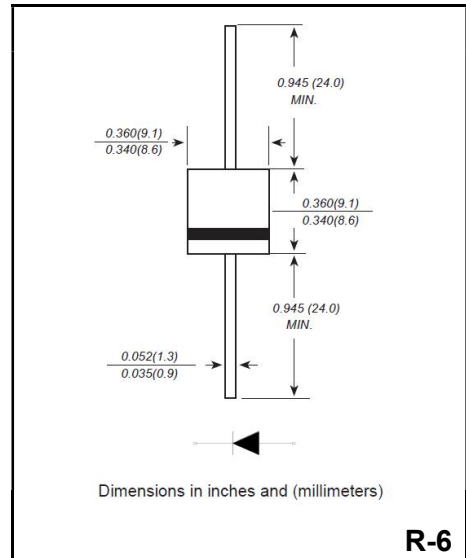

**MECHANICAL DATA**

- ◆ Case: R-6
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 2.05g / 0.072oz


**Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	20A10	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	1000	V
Maximum RMS voltage	$V_{RMS}$	700	V
Maximum DC Blocking Voltage	$V_{DC}$	1000	V
Maximum Average Forward Rectified Current 9.5mm Lead Length. at $T_A = 75^{\circ}C$	$I_{F(AV)}$	20.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load $T_j = 125^{\circ}C$	$I_{FSM}$	800	A
Maximum Instantaneous Forward Voltage at 20A	$V_F$	1.0	V
Maximum DC Reverse Current $T_a = 25^{\circ}C$ at Rated DC Blocking Voltage $T_a = 100^{\circ}C$	$I_R$	10.0 100	$\mu A$
Typical Junction Capacitance	$C_j$	200	pF
Typical Thermal Resistance	$R_{\theta JA}$	10	$^{\circ}C/W$
Operating and Storage Temperature Range	$T_j, T_{stg}$	-50 ~ +125	$^{\circ}C$

3. 1 -- TYPICAL FORWARD CHARACTERIST

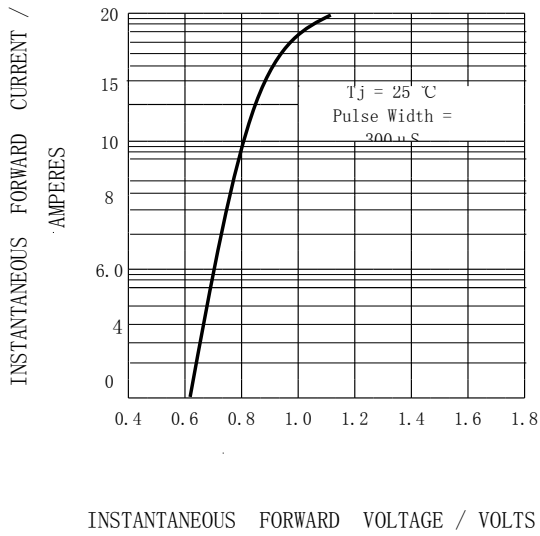

G. 2 -- TYPICAL JUNCTION CAPACITANCE

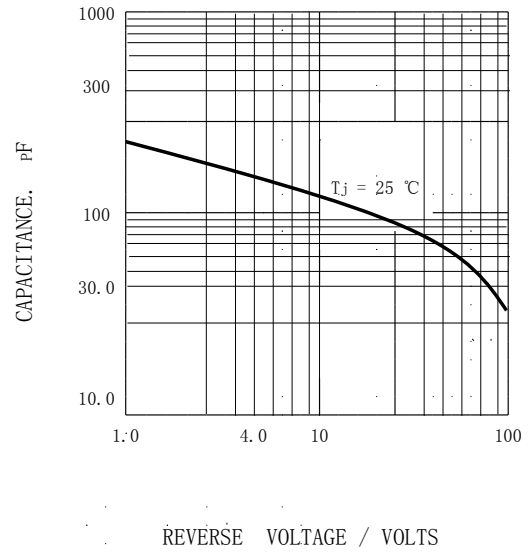


FIG. 3 -- FORWARD CURRENT DERATING CURVE



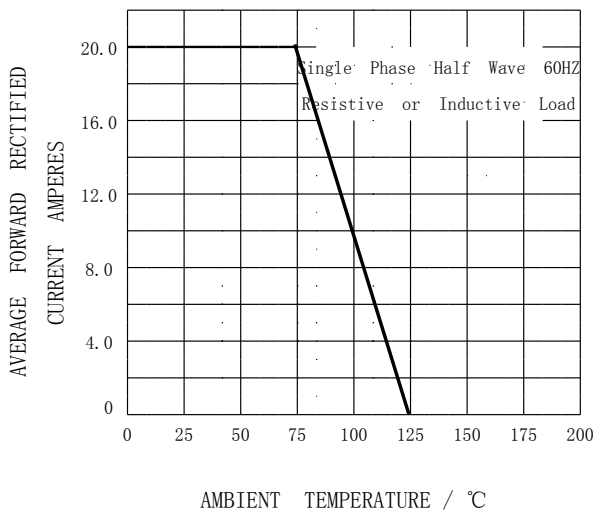


FIG. 4 -- PEAK FORWARD SURGE CURRENT

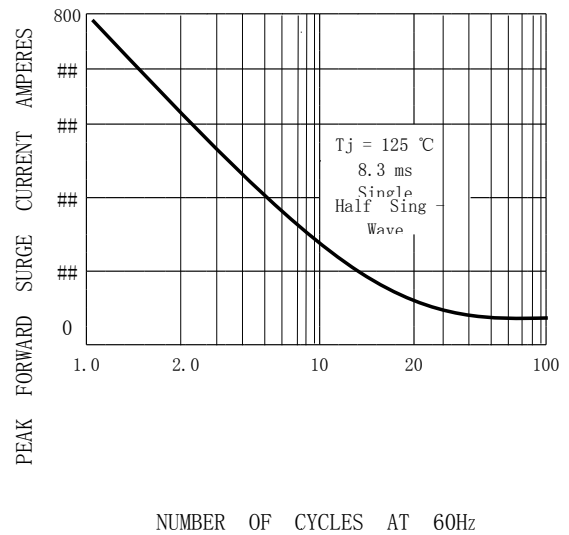

Package Outline R-6

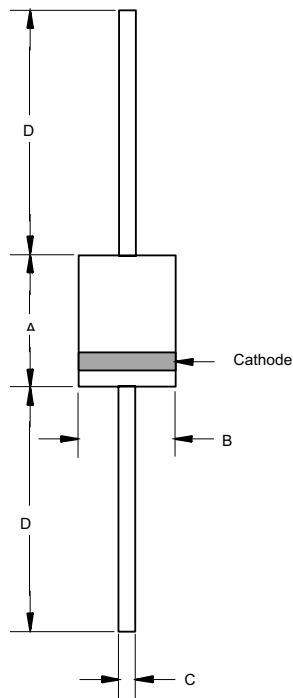

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.340	.360	8.60	9.10	
B	.340	.360	8.60	9.10	
C	.048	.052	1.20	1.30	
D	1.000	---	25.40	---	

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
R-6	BOX	500	EIA-481-1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [YFW Electronics manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#)  
[SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914BTR](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-](#)  
[TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#)  
[CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-](#)  
[HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#) [BAV99TQ-13-F](#) [BAV99HDW-13](#)  
[MMDB30-E28X](#) [IDP20C65D2XKSA1](#) [LS4148](#) [IDV15E65D2](#) [NSVM1MA152WAT1G](#) [HN4D02JU\(TE85L,F\)](#) [MMD820-C12](#)