


NPN Plastic-Encapsulate Transistors
General Purpose Amplifier

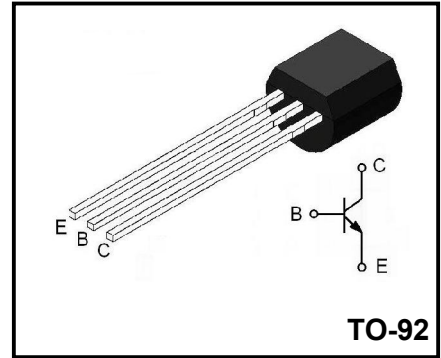

Absolute Maximum Rating (Ta=25°C)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	BV_{CBO}	180	V
Collector-Emitter Voltage	BV_{CEO}	160	V
Emitter-Base Voltage	BV_{EBO}	6	V
Collector Current	I_C	100	mA
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55~+150	°C

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Collector-base breakdown voltage	BV_{CBO}	$I_C = 100\mu A, I_E = 0$	180			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C = 1mA, I_B = 0$	160			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = 100\mu A, I_C = 0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB} = 120V, I_E = 0$			50	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 4V, I_C = 0$			50	nA
DC current gain	h_{FE}	$V_{CE} = 5V, I_C = 1mA$	80			
		$V_{CE} = 5V, I_C = 10mA$	80		250	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 50mA, I_B = 5mA$			0.2	V
Base -emitter saturation voltage	$V_{BE(sat)}$	$I_C = 50mA, I_B = 5mA$			1.0	V
Transition frequency	f_T	$V_{CE} = 10V, I_B = 10mA$	100			MHz

Typical Characteristics

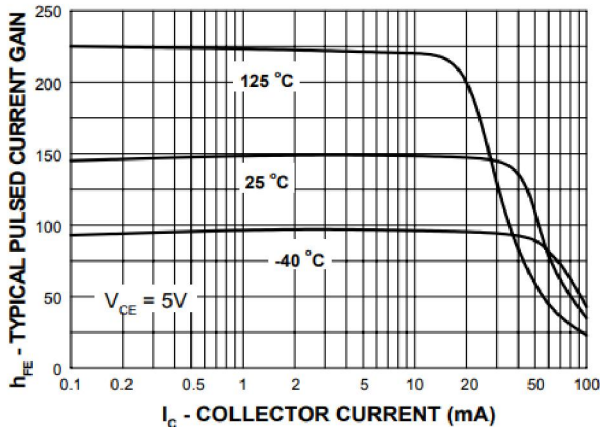


Figure 1. Typical Pulsed Current Gain vs Collector Current

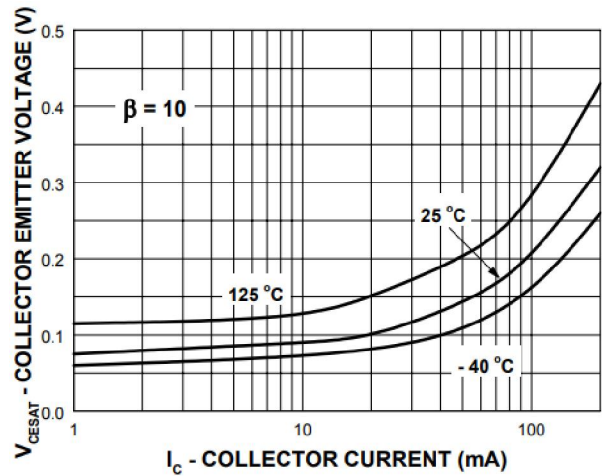


Figure 2. Collector-Emitter Saturation Voltage vs Collector Current

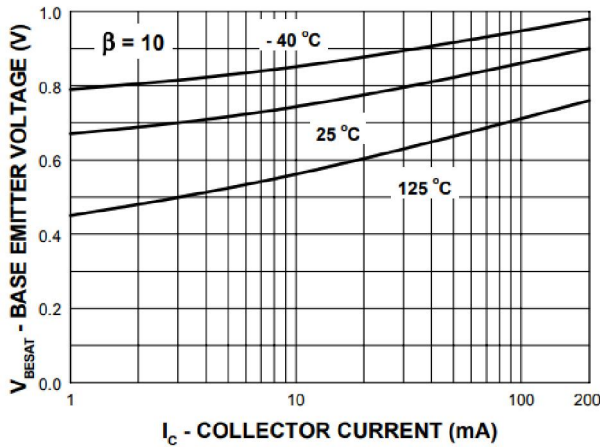


Figure 3. Base-Emitter Saturation Voltage vs Collector Current

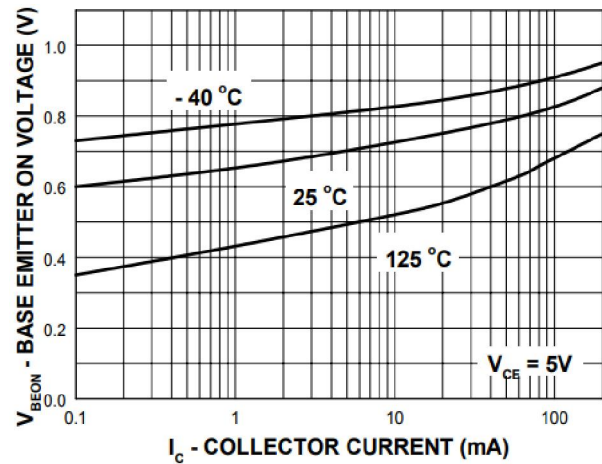


Figure 4. Base-Emitter ON Voltage vs Collector Current

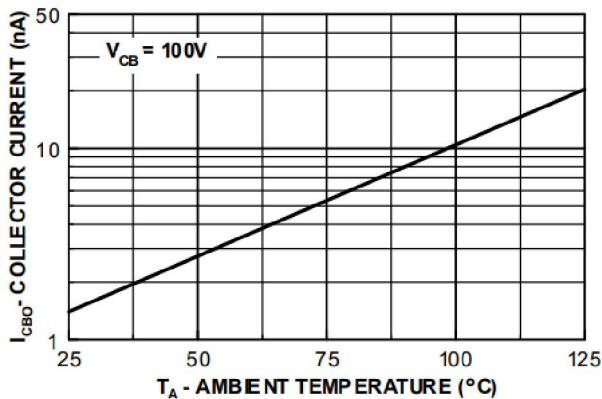


Figure 5. Collector-Cutoff Current vs Ambient Temperature

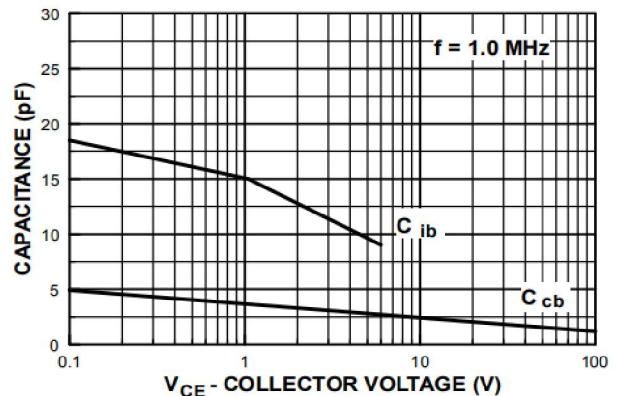


Figure 6. Collector-Emitter Breakdown Voltage with Resistance Between Emitter-Base

Package Dimensions

TO-92

	Symbol	Millimeter		Inches	
		Min.	Max.	Min.	Max.
	A	3.30	3.70	0.130	0.146
	A1	2.30	2.70	0.091	0.106
	b	0.40	0.50	0.016	0.020
	b1	0.50	0.70	0.020	0.028
	c	0.35	0.45	0.014	0.018
	D	4.45	4.70	0.175	0.185
	E	4.40	4.65	0.173	0.183
	e	1.17	1.37	0.046	0.054
	e1	2.34	2.64	0.092	0.104
	L	13.50	14.50	0.531	0.571
L1	1.80	2.20	0.071	0.087	

Package	Packing Method	Pack Quantity
TO-92	Bulk	1000pcs/Bag
TO-92	Tape	2000pcs/Box

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [YFW Electronics manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)