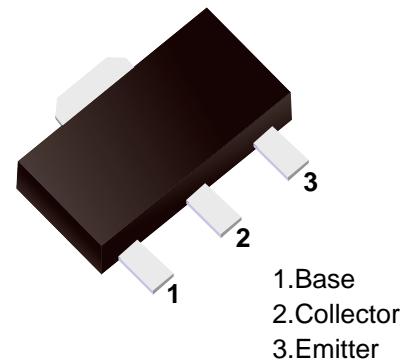


■ PNP Transistors

■ Features

- High voltage
- Large continuous collector current capability

■ Simplified outline(SOT-89)
■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V _{CBO}	-160	V
Collector - Emitter Voltage	V _{CEO}	-160	
Emitter - Base Voltage	V _{EBO}	-6	
Collector Current - Continuous	I _c	-1	A
Collector Power Dissipation	P _c	0.5	W
Thermal Resistance from Junction to Ambient	R _{θJA}	250	°C/W
Junction Temperature	T _J	150	°C
Storage Temperature range	T _{stg}	-55 to 150	

■ Electrical Characteristics Ta = 25°C


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{CBO}	I _c = -100 μA, I _E =0	-160			V
Collector-emitter breakdown voltage	V _{CEO}	I _c = -1 mA, I _B =0	-160			
Emitter-base breakdown voltage	V _{EBO}	I _E = -100 μA, I _c =0	-6			
Collector-base cut-off current	I _{CBO}	V _{CB} = -150 V, I _E =0			-1	uA
Emitter cut-off current	I _{EBO}	V _{EB} = -6V, I _c =0			-1	
Collector-emitter saturation voltage	V _{CE(sat)}	I _c =-500 mA, I _B =-50mA			-1.5	V
Base-emitter saturation voltage	V _{BE(sat)}	I _c = -500 mA, I _B =- 50mA			-1.2	
Base-emitter voltage	V _{BE}	V _{CE} = -5V, I _c = -5mA			-0.75	
DC current gain	h _{FE}	V _{CE} = -5V, I _c = -200mA	60		320	
Transition frequency	f _t	V _{CE} = -5V, I _c = -200mA	15			MHz

■ Classification of h_{FE}

Type	2SA1013-R	2SA1013-O	2SA1013-Y
Range	60-120	100-200	160-320
Marking	1013R	1013O	1013Y

Package Outline

SOT-89

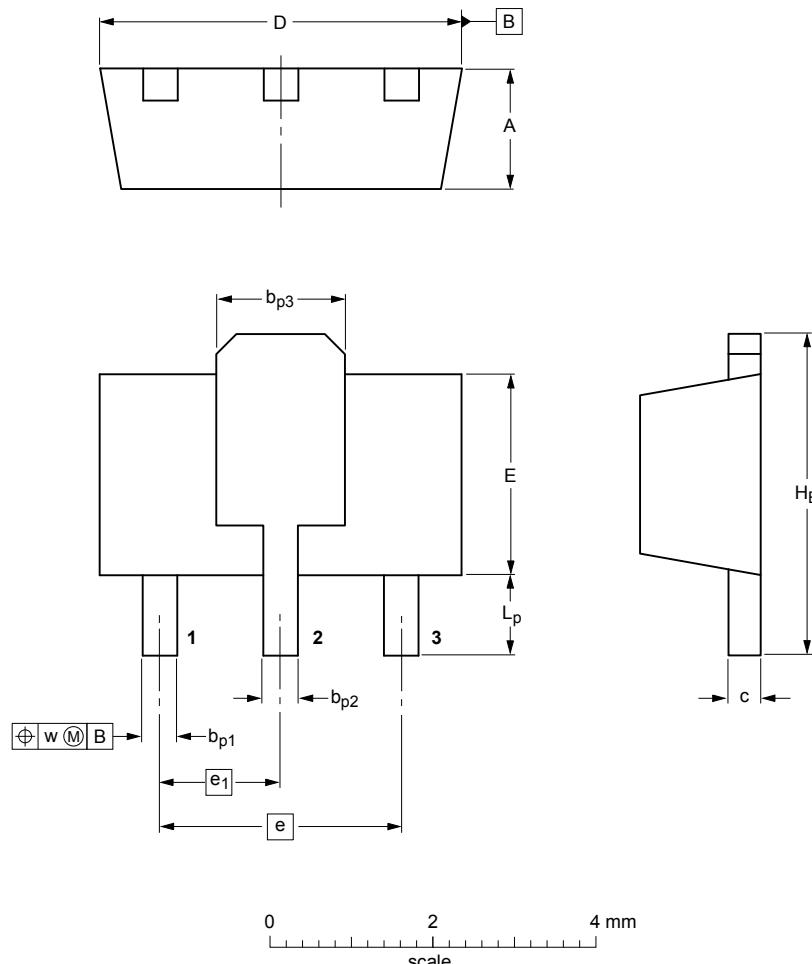

DIMENSIONS (mm are the original dimensions)

UNIT	A	b_{p1}	b_{p2}	b_{p3}	c	D	E	e	e_1	H_E	L_p	w
mm	1.6 1.4	0.48 0.35	0.53 0.40	1.8 1.4	0.44 0.23	4.6 4.4	2.6 2.4	3.0	1.5	4.25 3.75	1.2 0.8	0.13

Summary of Packing Options

Package	Package Description	Packing Quantity	Industry Standard
SOT-89	Tape/Reel, 7" reel	1000	EIA-481-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by YFW Electronics manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-](#)
[NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)