


**4 Channel Ultra-low Capacitance
ESD Protection Diode**

Features

- ◆Ultra-Low capacitance:0.45pF(typ.)
- ◆Reverse stand-off voltage:5 V
- ◆IEC 61000-4-2 (ESD Air): ±20kV
- ◆IEC 61000-4-2 (ESD Contact): ±20kV

Application

- ◆USB 3.0, USB 2.0
- ◆HDMI 1.3/1.4, Display Port 1.3, eSATA
- ◆Unified Display Interface (UDI)
- ◆Digital Visual Interface (DVI)
- ◆High speed serial interfaces

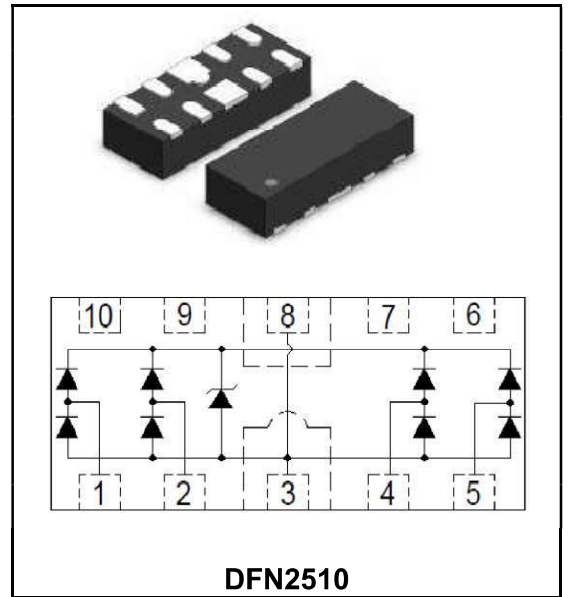

Order Information

Part Number	Package	Marking	Size (mm)	Delivery Form	Delivery Quantity
ESD2510D5V0B	DFN2510	5B.	2.50X1.00X0.50	7" T&R	3000PCS/Tape

Limiting Values(TA = 25 °C, unless otherwise specified)

Symbol	Parameter	Conditions	Min	Max	Unit
VESD	Electrostatic Discharge Voltage	IEC 61000-4-2; Contact Discharge	-	±20	kV
		IEC 61000-4-2; Air Discharge	-	±20	kV
IPPM	Rated Peak Pulse Current	tP = 8/20 μs	-	4.5	A
PPP	Peak Pulse Power	tP = 8/20 μs	-	63	W
TA	Ambient Temperature Range	-	-55	125	°C
Tstg	Storage Temperature Range	-	-55	150	°C

Electrical Characteristics(TA = 25 °C unless otherwise specified)

Symbol	Parameter	conditions	Min	Typ.	Max	Unit
V _{RWM}	Reverse Working Voltage	T _A = 25 °C	-	-	5	V
V _{BR}	Breakdown Voltage	I _R = 1 mA; T _A = 25 °C	6	-	-	V
I _R	Reverse Leakage current	V _{RWM} = 5V; T _A = 25C	-	-	100	nA
V _C	Clamping Voltage	I _{pp} = 1A, t _p = 8/20us, Any I/O to GND , Positive	-	-	9.8	V
		I _{pp} = 4.5A, t _p = 8/20us, Any I/O to GND , Positive	-	-	14	V
C _L	Junction Capacitance	V _R = 0V, f = 1 MHz, I/O to I/O	-	0.22	0.3	pF
		V _R = 0V, f = 1 MHz, I/O to GND	-	0.45	0.6	pF

Typical Characteristics

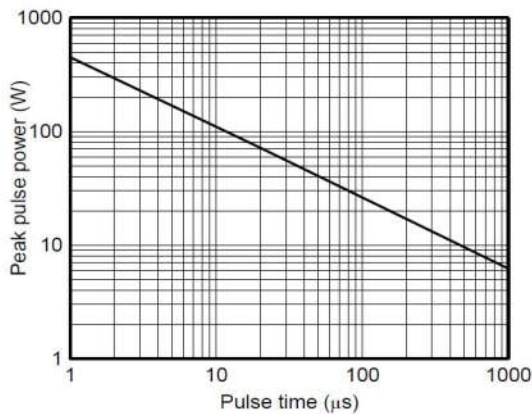


Fig.1 Peak Pulse Power Rating Cure

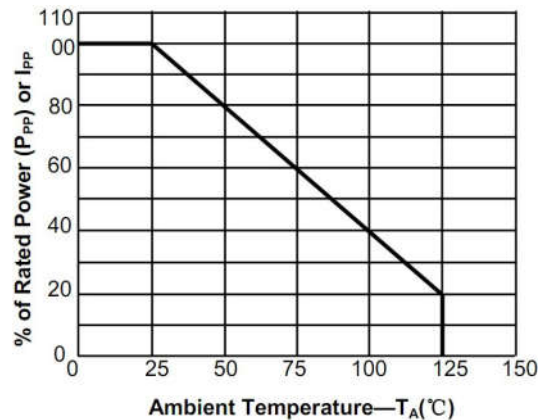


Fig.2 Pulse Derating Curve

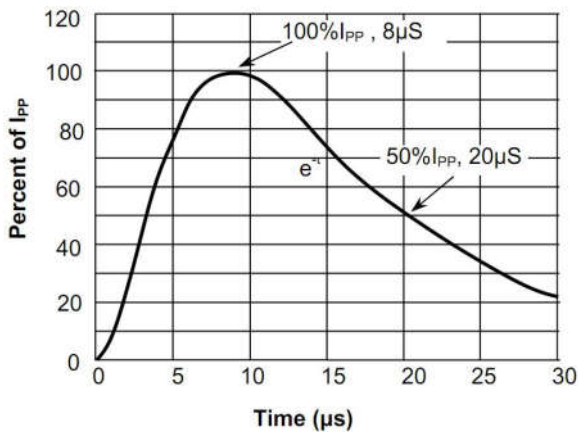


Fig.3 Pulse Waveform- 8/20us


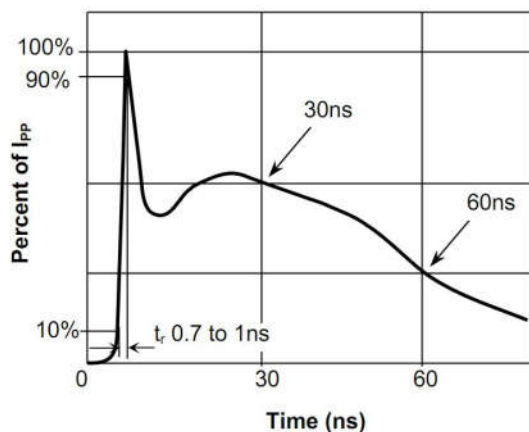


Fig.4 Pulse Waveform-ESD (IEC61000-4-2)


DFN2510 Package Outline




Top View

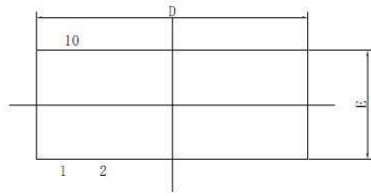

Side View

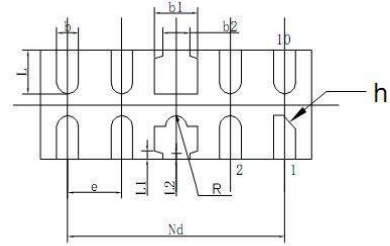


Bottom View



Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	0.45	0.50	0.55
A1	-	0.02	0.05
b	0.15	0.20	0.25
b1	0.35	0.40	0.45
b2	0.20	0.25	0.30
c	0.10	0.15	0.20
D	2.45	2.50	2.55
e	0.50BSC		
Nd	2.00BSC		
E	0.95	1.00	1.05
L	0.35	0.40	0.45
L1	0.075REF		
L2	0.05REF		
h	0.08	0.12	0.15
R	0.05	0.10	0.15

Soldering Parameters

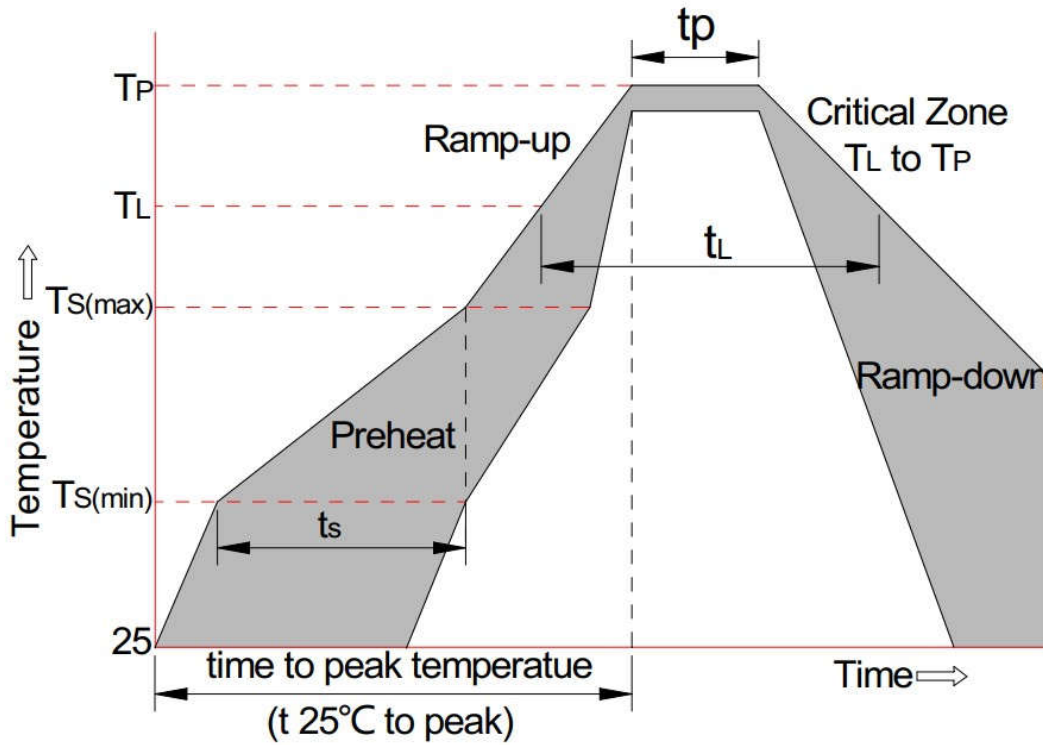

Reflow Condition		Pb-Free Assembly
Pre-heat	-Temperature Min (Ts(min))	+150°C
	-Temperature Max(Ts(max))	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (TL) to peak)		3°C/sec. Max
Ts(max) to TL - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(TL)(Liquid us)	+217°C
	-Temperature(tL)	60-150 secs.
Peak Temp (Tp)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (tp)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
xTime 25°C to Peak Temp (TP)		8 min. Max
Do not exceed		+260°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955](#) [W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)