


**SCHOTTKY BARRIER RECTIFIER**

**Reverse Voltage - 60 V**

**Forward Current - 40 A**

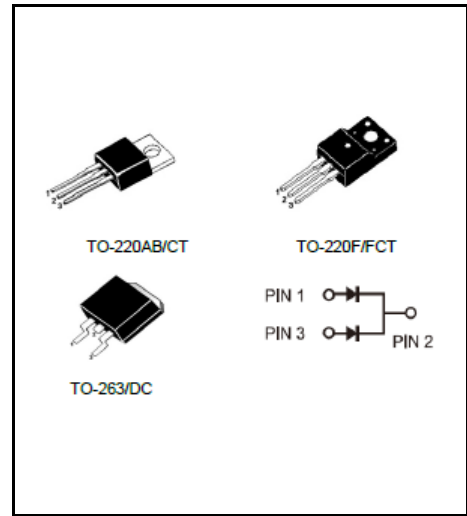

**FEATURES**

- ◆ Low forward voltage
- ◆ High current capability
- ◆ High forward surge capability
- ◆ Low power losses, High efficiency
- ◆ Guarding for over voltage protection
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- ◆ Case: TO-220AB/CT TO-220F/FCT TO-263/DC
- ◆ Solder bath temperature 275°C maximum, 10s per JESD22-106

**Primary Characteristic**

|                          |              |
|--------------------------|--------------|
| <b>I<sub>o</sub></b>     | <b>2*20A</b> |
| <b>V<sub>RRM</sub></b>   | <b>60V</b>   |
| <b>I<sub>FSM</sub></b>   | <b>480A</b>  |
| <b>V<sub>F</sub></b>     | <b>0.60V</b> |
| <b>T<sub>J</sub> Max</b> | <b>150°C</b> |

**Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified**

| Parameter  | Symbols                                | Value      | Units       |
|--|--|------------|-------------|
| Maximum Repetitive Peak Reverse Voltage                                | <b>V<sub>RRM</sub></b>                 | 60         | <b>V</b>    |
| Maximum RMS voltage  | <b>V<sub>RMS</sub></b>                 | 60         | <b>V</b>    |
| Maximum DC Blocking Voltage  | <b>V<sub>DC</sub></b>                  | 60         | <b>V</b>    |
| Maximum Average Forward Rectified Current                              | Per Leg                                | 20         | <b>A</b>    |
|  | Total                                  | 40         |             |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave                | <b>I<sub>FSM</sub></b>                 | 480        | <b>A</b>    |
| Operating Temperature Range  | <b>T<sub>J</sub></b>                   | -55 ~ +150 | <b>°C</b>   |
| Storage Temperature Range  | <b>T<sub>STG</sub></b>                 | -55 ~ +150 | <b>°C</b>   |
| Typical Thermal Resistance <sup>(Note1)</sup> TO-220AB, TO-263 TO-220F | <b>R<sub>θJA</sub> R<sub>θJC</sub></b> | 2/4        | <b>°C/W</b> |

**Note1:** Thermal resistance from Junction to case per leg mounted on heatsink.

**Electrical Characteristics (Per Leg) unless otherwise specified**

| Characteristics  | Symbols              | Value    |      | Units |           |
|--|----------------------|----------|------|-------|-----------|
|  |                      | Typ      | Max  |       |           |
| Forward Voltage Drop(Note2)<br>at I <sub>F</sub> =5A<br>at I <sub>F</sub> =10A<br>at I <sub>F</sub> =20A | <b>V<sub>F</sub></b> | TA=25°C  | 0.47 | -     | <b>V</b>  |
|  |                      | TA=125°C | 0.39 | -     |           |
|  |                      | TA=25°C  | 0.55 | -     |           |
|  |                      | TA=125°C | 0.49 | -     |           |
|  |                      | TA=25°C  | 0.68 | 0.75  |           |
|  |                      | TA=125°C | 0.60 | -     |           |
| Maximum Reverse Current at V <sub>R</sub> =60V   | <b>I<sub>R</sub></b> | TA=25°C  | 10   | 200   | <b>uA</b> |
|  |                      | TA=125°C | 7    | -     | <b>mA</b> |

**Note2:** Pulse test: 300 μs pulse width, 1 % duty cycle

**RATINGS AND CHARACTERISTIC CURVES**

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

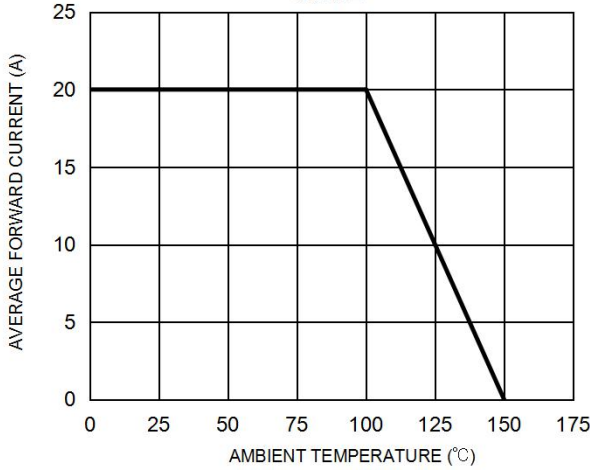


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

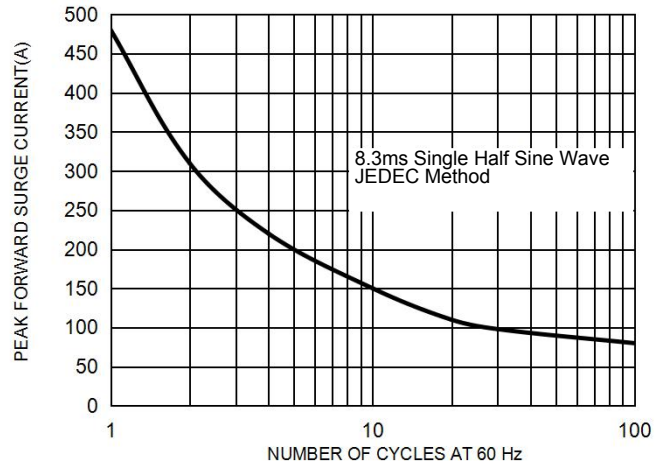


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG



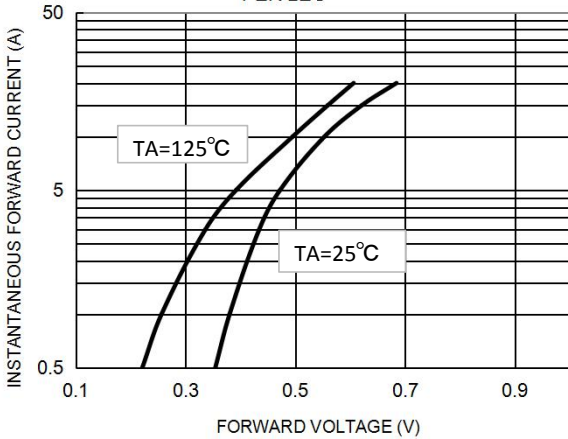



FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

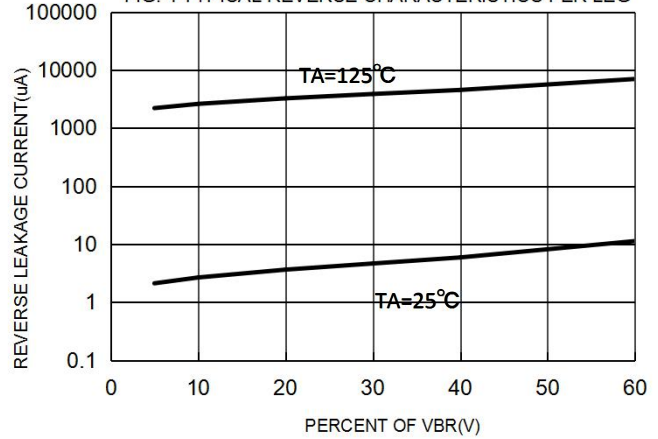

**Marking on the body**

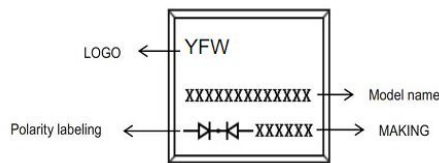

MAKING:

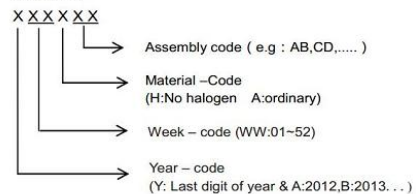

**Ordering information**

| Part Number | Package  | Unit Weight   | Base Quantity  | Delivery mode              |
|-------------|----------|---------------|----------------|----------------------------|
| MBR4060CT-B | TO-220AB | 0.07oz(1.96g) | 50 pcs / tube  | 1000pcs/box 5000pcs/carton |
| MBR4060FCT  | TO-220F  | 0.06oz(1.74g) | 50 pcs / tube  | 1000pcs/box 5000pcs/carton |
| MBR4060DC   | TO-263   | 0.04oz(1.16g) | 50 pcs / tube  | 1000pcs/box 5000pcs/carton |
| MBR4060DC-R | TO-263   | 0.04oz(1.16g) | 800 pcs / reel | 800pcs/box4000pcs/carton   |

Note: For Halogen Free molding compound, add "H" suffix to part number above.

**Package Outline Dimensions millimeters**


**TO-220AB**

|                              |      |          |       |
|------------------------------|------|----------|-------|
|                              | Dim. | Min.     | Max.  |
|                              | A    | 10.15    | 10.35 |
|                              | B    | 2.65     | 2.95  |
|                              | C    | 3.70     | 3.90  |
|                              | D    | 28.5     | 29.5  |
|                              | E    | 1.30     | 1.45  |
|                              | F    | 6.35     | 6.55  |
|                              | G    | 2.9      | 3.3   |
|                              | H    | 15.0     | 16.0  |
|                              | I    | 0.38     | 0.42  |
|                              | J    | 4.45     | 4.55  |
|                              | K    | 1.25     | 1.35  |
|                              | L    | Typ 5.08 |       |
|                              | M    | Typ 2.54 |       |
| N                            | 3.1  | 3.3      |       |
| O                            | 0.76 | 0.84     |       |
| All Dimensions in millimeter |      |          |       |

**TO-220F**

|                              |      |          |       |
|------------------------------|------|----------|-------|
|                              | Dim. | Min.     | Max.  |
|                              | A    | 9.95     | 10.25 |
|                              | B    | 2.95     | 3.25  |
|                              | C    | 1.25     | 1.45  |
|                              | D    | 12.95    | 13.25 |
|                              | E    | 0.50     | 0.65  |
|                              | F    | 3.1      | 3.3   |
|                              | G    | 1.30     | 1.45  |
|                              | H    | Typ 2.54 |       |
|                              | I    | Typ 5.08 |       |
|                              | J    | 4.60     | 4.75  |
|                              | K    | 2.50     | 2.65  |
|                              | L    | 6.35     | 6.55  |
|                              | M    | 15.4     | 16.0  |
|                              | N    | 2.75     | 3.05  |
|                              | O    | 0.48     | 0.52  |
| P                            | 0.76 | 0.84     |       |
| All Dimensions in millimeter |      |          |       |

TO-263

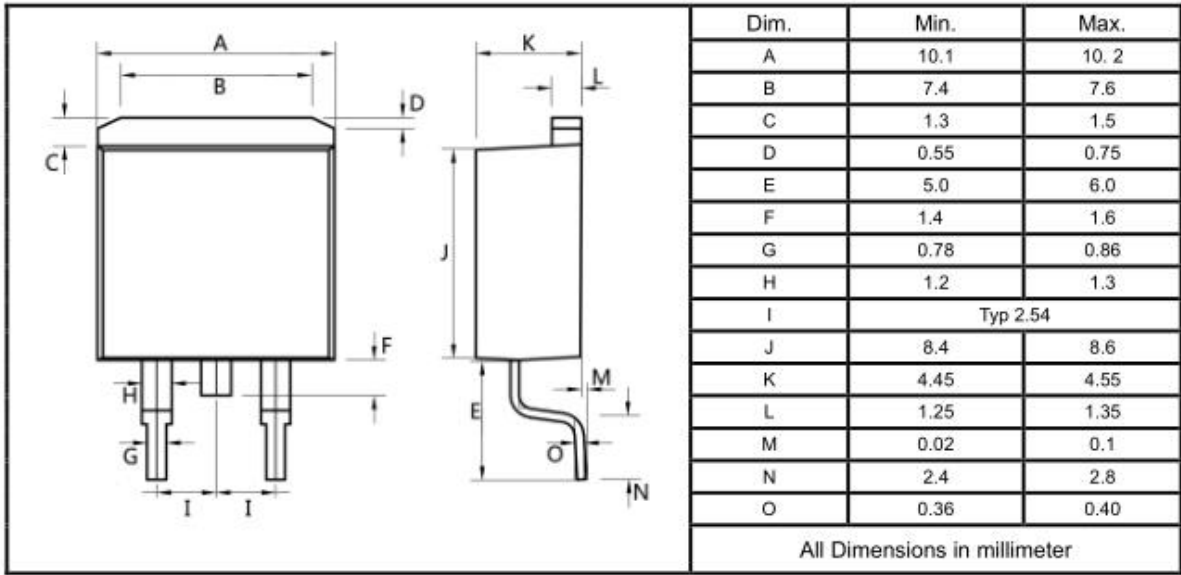

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [YFW Electronics](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBRA140TRPBF](#)  
[MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#)  
[NTSB30U100CT-1G](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)  
[ACDBA260LR-HF](#) [ACDBA1100-HF](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [VSSB410S-M3/5BT](#) [1N5819T-G](#) [PDS1040Q-13](#) [B160BQ-13-F](#)  
[SDM05U20CSP-7](#) [BAS 70-07 E6433](#) [B140S1F-7](#) [HSM560Je3/TR13](#) [DDB2265-000](#) [ZHCS506QTA](#) [HSM190Je3/TR13](#) [B330AF-13](#)  
[ACDBUC0230-HF](#) [SDM1U100S1F-7](#) [MBR10200CTF-G1](#) [CDLL5712](#) [DMF2822-000](#)