

■ NPN Transistors



■ Simplified outline(SOT-23)

■ Features

- High Voltage Transistors
- Pb-Free Packages are Available

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage	V <sub>CB0</sub>	180	V
Collector-emitter voltage	V <sub>CEO</sub>	160	V
Emitter-base voltage	V <sub>EB0</sub>	6	V
Collector current-continuous	I <sub>C</sub>	0.6	A
Collector Power Dissipation	P <sub>C</sub>	300	mW
Junction and storage temperature	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

■ Electrical Characteristics Ta = 25°C


Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V <sub>CB0</sub>	I <sub>C</sub> = 100uA, I <sub>E</sub> = 0	180			V
Collector-emitter breakdown voltage *	V <sub>CEO</sub>	I <sub>C</sub> = 1.0 mA, I <sub>B</sub> = 0	160			V
Emitter-base breakdown voltage	V <sub>EB0</sub>	I <sub>E</sub> = 10uA, I <sub>C</sub> = 0	6			V
Collector cutoff current	I <sub>CB0</sub>	V <sub>CB</sub> = 120 V, I <sub>E</sub> = 0			50	nA
Emitter cutoff current	I <sub>EB0</sub>	V <sub>EB</sub> = 4.0 V, I <sub>C</sub> = 0			50	nA
DC current gain *	h <sub>FE</sub>	I <sub>C</sub> = 1.0 mA, V <sub>CE</sub> = 5 V	80			
		I <sub>C</sub> = 10 mA, V <sub>CE</sub> = 5 V	100		300	
		I <sub>C</sub> = 50 mA, V <sub>CE</sub> = 5 V	50			
Collector-emitter saturation voltage *	V <sub>CE(sat)</sub>	I <sub>C</sub> = 50 mA, I <sub>B</sub> = 5.0 mA			0.5	V
Base-emitter saturation voltage *	V <sub>BE(sat)</sub>	I <sub>C</sub> = 50 mA, I <sub>B</sub> = 5.0 mA			1.0	V
Transiston frequency	f <sub>T</sub>	V <sub>CE</sub> =10V,I <sub>C</sub> =10mA,f=100MHz	100			MHz

\* Pulse Test: Pulse Width = 300 μs, Duty Cycle=2.0%.

■ Classification of h<sub>FE</sub>(2)


Type	MMBT5551	MMBT5551-L	MMBT5551-H
Range	100-300	100-200	200-300
Marking	G1		

■ Typical Characteristics

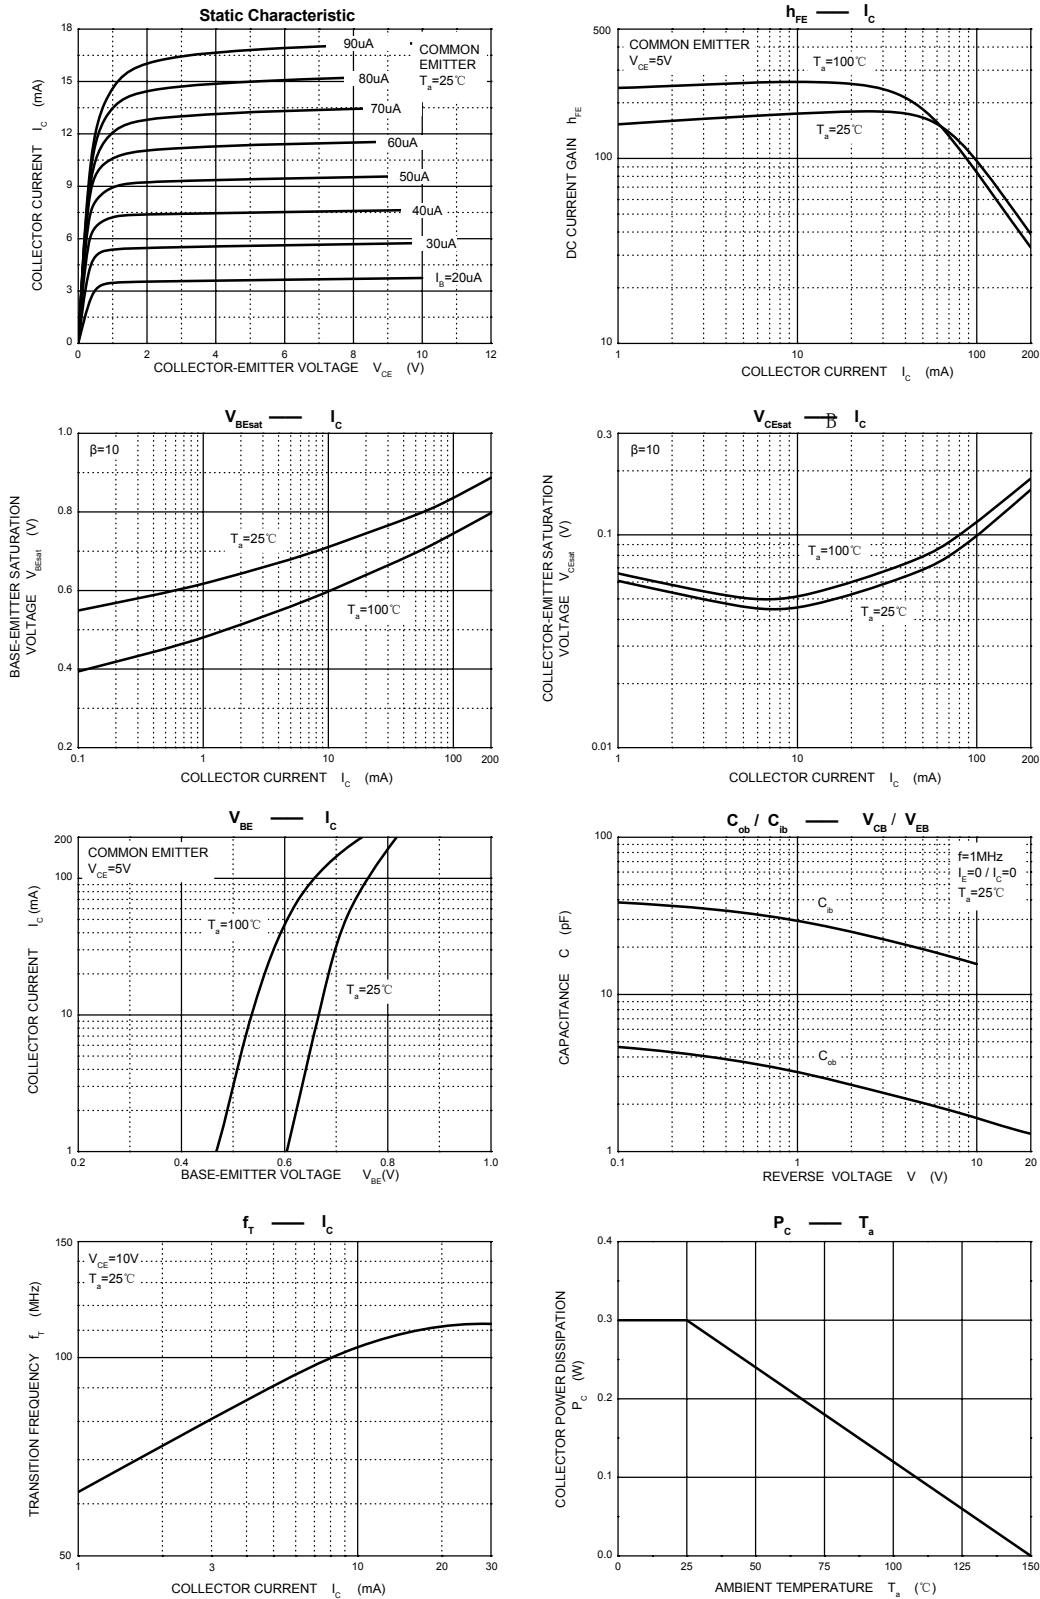

**Package Outline**

**SOT-23**



**DIMENSIONS (mm are the original dimensions)**

UNIT	A	A <sub>1</sub> max.	b <sub>p</sub>	c	D	E	e	e <sub>1</sub>	H <sub>E</sub>	L <sub>p</sub>	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

**Summary of Packing Options**

Package	Packing Description	Packing Quantity	Industry Standard
SOT-23	Tape/Reel, 7" reel	3000	EIA-481-1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [YFW Electronics manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)  
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)  
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)  
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)  
[MMDT3946FL3-7](#) [2N4240](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#)