

**Trench MOS Barrier Schottky Rectifier**

**Reverse Voltage - 100 V**

**Forward Current - 30 A**



**FEATURES**

- ◆Very low forward voltage
- ◆High current capability
- ◆High forward surge capability
- ◆Low power losses · High efficiency
- ◆Guarding for over voltage protection
- ◆Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- ◆Case: TO-220AB/CT TO-220F/FCT TO-263/DC
- ◆Solder bath temperature 275°C maximum, 10s per JESD22-106



**Primary Characteristic**

|                          |              |
|--------------------------|--------------|
| <b>I<sub>o</sub></b>     | <b>2*15A</b> |
| <b>V<sub>RRM</sub></b>   | <b>100V</b>  |
| <b>I<sub>FSM</sub></b>   | <b>220A</b>  |
| <b>V<sub>F</sub></b>     | <b>0.63V</b> |
| <b>T<sub>J</sub> Max</b> | <b>150°C</b> |

**Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified**

| Parameter   | Symbols                                 | Value      | Units       |
|---|---|------------|-------------|
| Maximum Repetitive Peak Reverse Voltage                     | <b>V<sub>RRM</sub></b>                  | 100        | <b>V</b>    |
| Maximum RMS voltage   | <b>V<sub>RMS</sub></b>                  | 100        | <b>V</b>    |
| Maximum DC Blocking Voltage                                 | <b>V<sub>DC</sub></b>                   | 100        | <b>V</b>    |
| Maximum Average Forward Rectified Current                   | Per Leg                                 | 15         | <b>A</b>    |
|   | Total                                   | 30         |             |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave     | <b>I<sub>FSM</sub></b>                  | 220        | <b>A</b>    |
| Operating Temperature Range                                 | <b>T<sub>J</sub></b>                    | -50 ~ +150 | <b>°C</b>   |
| Storage Temperature Range                                   | <b>T<sub>STG</sub></b>                  | -50 ~ +150 | <b>°C</b>   |
| Typical Thermal Resistance (Note1) TO-220AB, TO-263 TO-220F | <b>R<sub>θJA</sub>/ R<sub>θJC</sub></b> | 2/4        | <b>°C/W</b> |

**Note1: Thermal resistance from Junction to case per leg mounted on heatsink.**

**Electrical Characteristics (Per Leg) unless otherwise specified**

| Characteristics                                      | Symbols              | Value                  |          | Units |           |      |
|--|----------------------|------------------------|----------|-------|-----------|------|
|  |                      | Typ                    | Max      |       |           |      |
| Forward Voltage Drop(Note2)<br>at I <sub>F</sub> =5A | <b>V<sub>F</sub></b> | TA=25°C                | 0.50     | -     | <b>V</b>  |      |
|  |                      | TA=125°C               | 0.44     | -     |           |      |
|  |                      | at I <sub>F</sub> =10A | TA=25°C  | 0.58  |           | 0.66 |
|  |                      |                        | TA=125°C | 0.56  |           | -    |
|  |                      | at I <sub>F</sub> =15A | TA=25°C  | 0.67  |           | 0.73 |
|  |                      |                        | TA=125°C | 0.63  |           | -    |
| Maximum Reverse Current at V <sub>R</sub> =100V      | <b>I<sub>r</sub></b> | TA=25°C                | 10       | 70    | <b>uA</b> |      |
|  |                      | TA=125°C               | 8        | -     | <b>mA</b> |      |

**Note2: Pulse test: 300 μs pulse width, 1 % duty cycle**

**RATINGS AND CHARACTERISTIC CURVES**

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

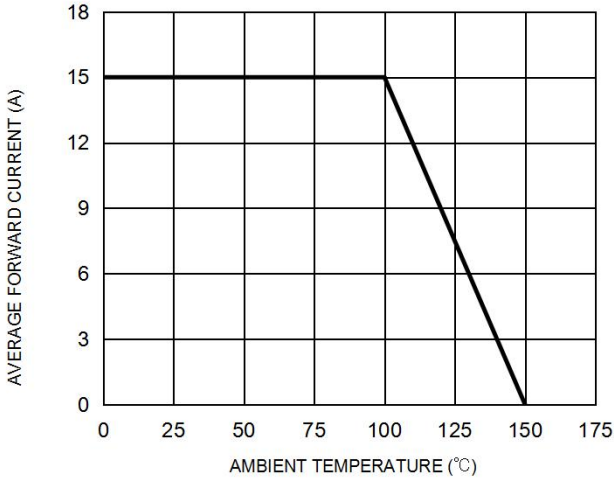


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

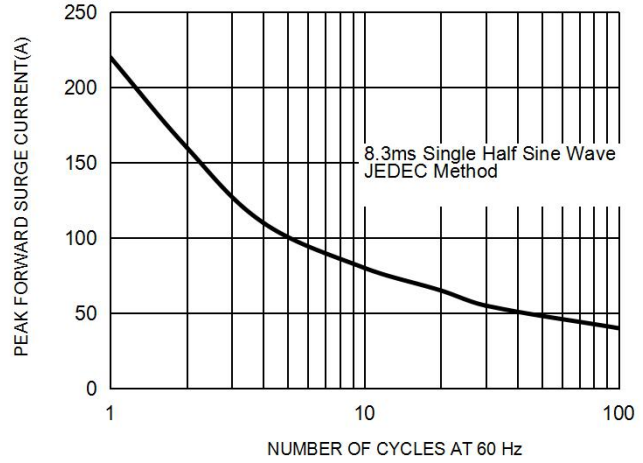


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG




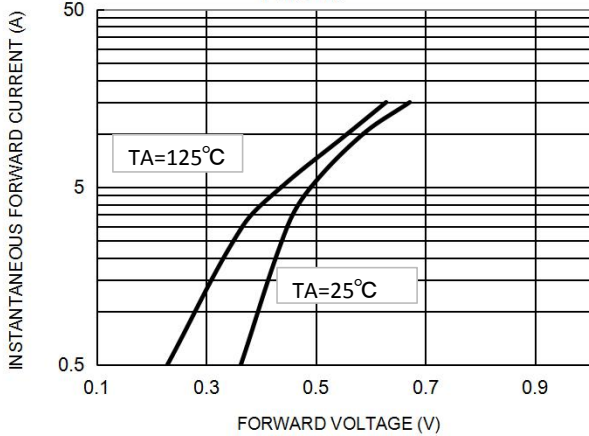


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

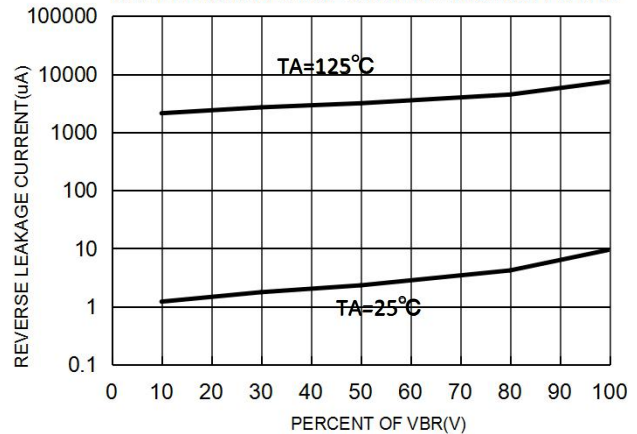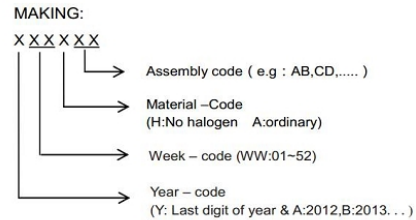

**Marking on the body**

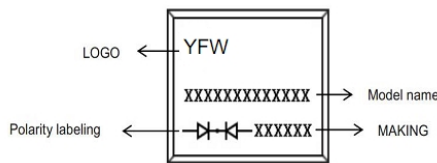


**Ordering information**

| Part Number   | Package  | Unit Weight   | Base Quantity  | Delivery mode              |
|---------------|----------|---------------|----------------|----------------------------|
| SRT30L100CT   | TO-220AB | 0.07oz(1.96g) | 50 pcs / tube  | 1000pcs/box 5000pcs/carton |
| SRT30L100FCT  | TO-220F  | 0.06oz(1.74g) | 50 pcs / tube  | 1000pcs/box 5000pcs/carton |
| SRT30L100DC   | TO-263   | 0.04oz(1.16g) | 50 pcs / tube  | 1000pcs/box 5000pcs/carton |
| SRT30L100DC-R | TO-263   | 0.04oz(1.16g) | 800 pcs / reel | 800pcs/box4000pcs/carton   |


Note: For Halogen Free molding compound, add "H" suffix to part number above.

Package Outline Dimensions millimeters


**TO-220AB**

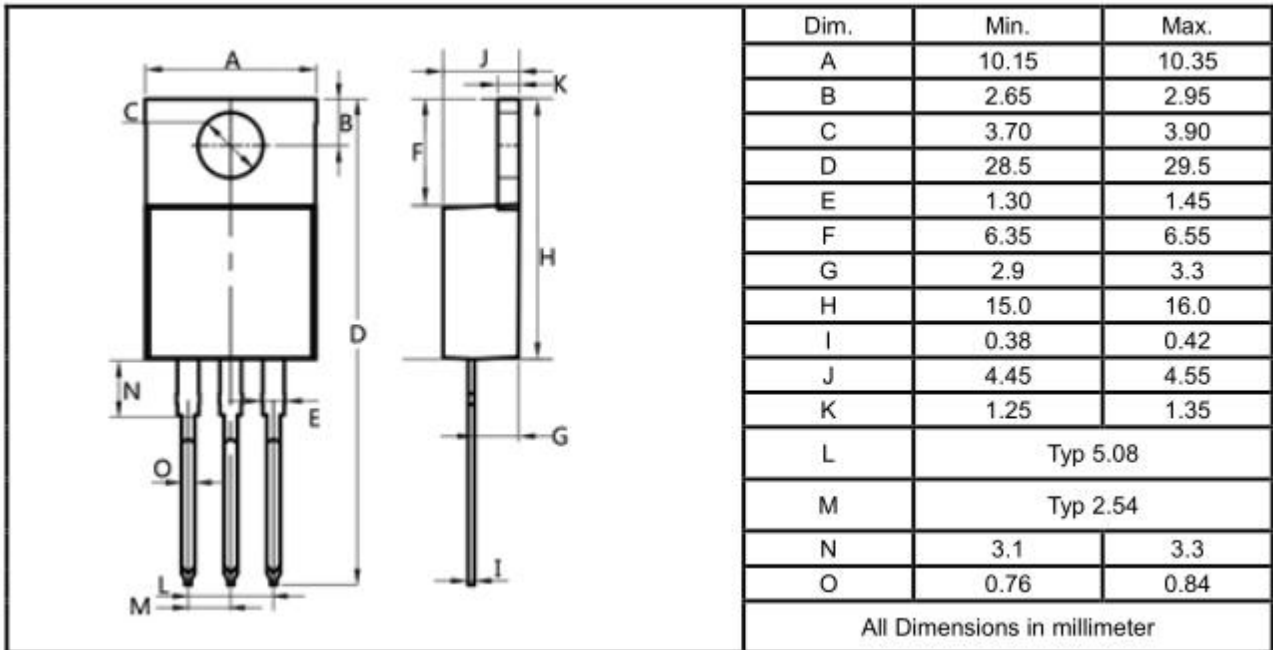

**TO-220F**

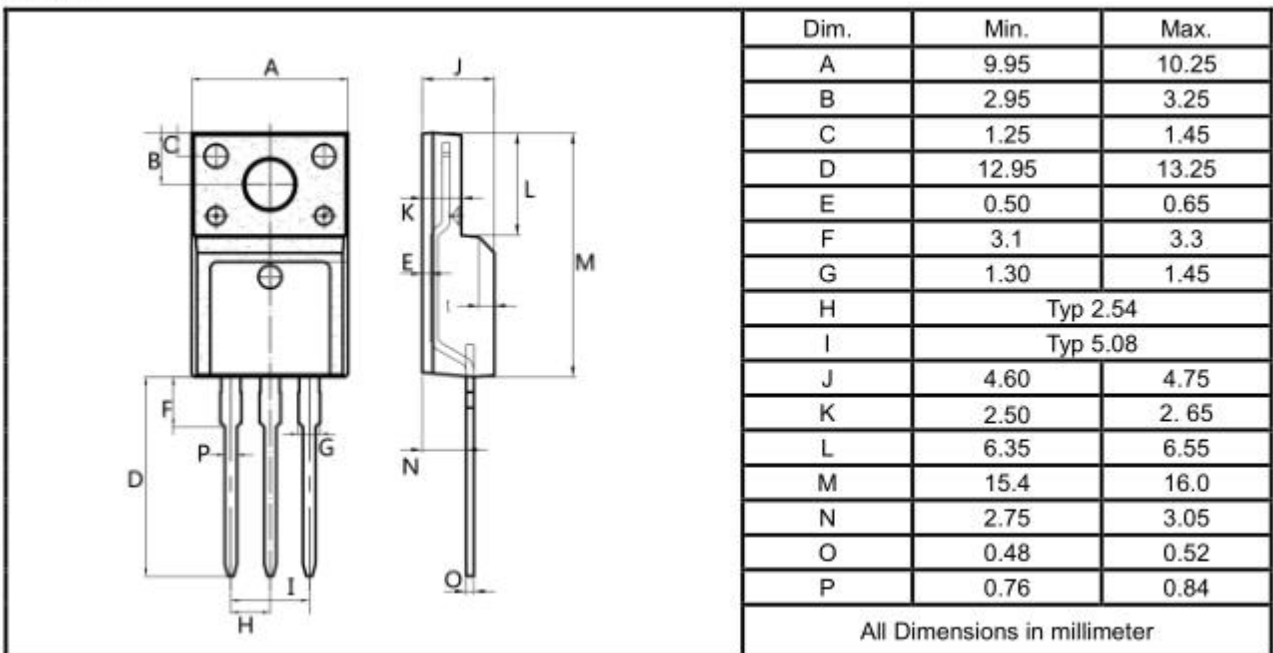

TO-263

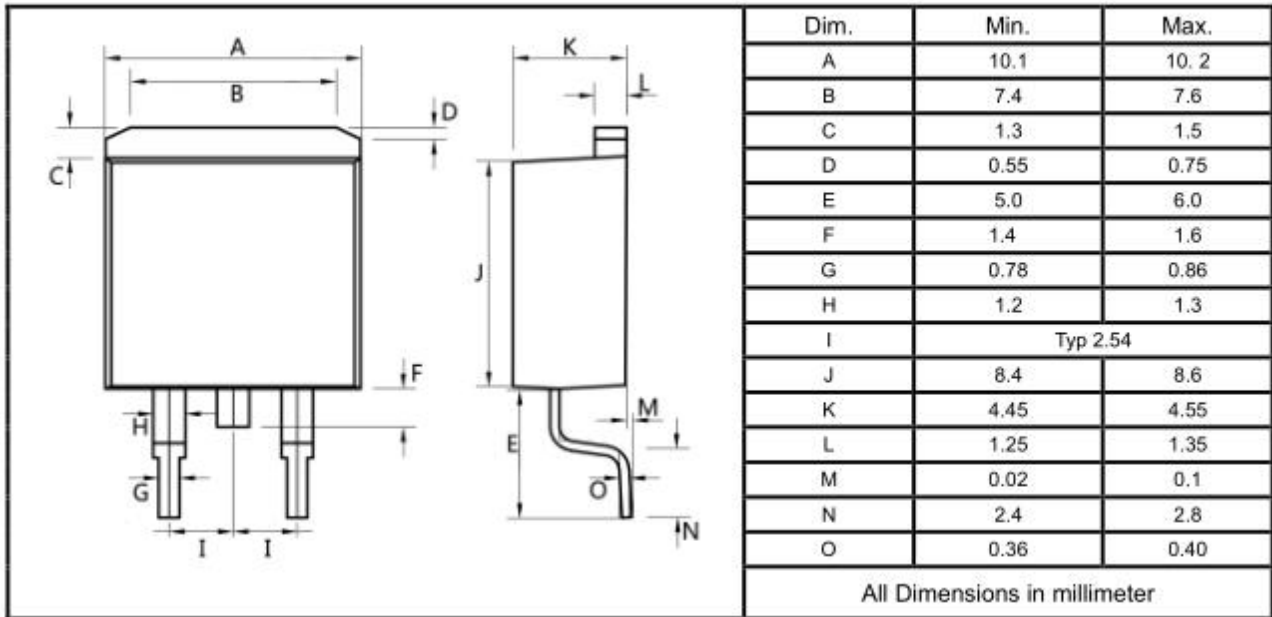

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [YFW Electronics](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBRA140TRPBF](#)  
[MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#)  
[NTSB30U100CT-1G](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)  
[ACDBA260LR-HF](#) [ACDBA1100-HF](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [VSSB410S-M3/5BT](#) [1N5819T-G](#) [PDS1040Q-13](#) [B160BQ-13-F](#)  
[SDM05U20CSP-7](#) [BAS 70-07 E6433](#) [B140S1F-7](#) [HSM560Je3/TR13](#) [DDB2265-000](#) [ZHCS506QTA](#) [HSM190Je3/TR13](#) [B330AF-13](#)  
[ACDBUC0230-HF](#) [SDM1U100S1F-7](#) [MBR10200CTF-G1](#) [CDLL5712](#) [DMF2822-000](#)