

SURFACE MOUNT SILICON ZENER DIODES

V_z : 2.7 - 200 V

P_D : 2 W


FEATURES :

- ◆ Complete Voltage Range 2.7 to 200 Volts
- ◆ High peak reverse power dissipation
- ◆ High reliability
- ◆ Low leakage current
- ◆ Pb / RoHS Free

MECHANICAL DATA

- ◆ Case : SMA (DO-214AC) Molded plastic
- ◆ Epoxy : UL94V-O rate flame retardant
- ◆ Lead : Lead formed for Surface mount
- ◆ Polarity : Color band denotes cathode end
- ◆ Mounting position : Any
- ◆ Weight : 0.064 grams

Pinning

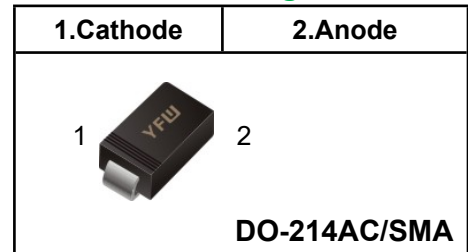

MAXIMUM RATINGS


Rating at 25 °C ambient temperature unless otherwise specified

Rating	Symbol	Value	Unit
DC Power Dissipation at T _L = 75 °C (Note1)	P _D	2	W
Maximum Forward Voltage at I _F = 200 mA	V _F	1.2	V
Junction Temperature Range	T _J	- 55 to + 150	°C
Storage Temperature Range	T _s	- 55 to + 150	°C

Note :

(1) T_L = Lead temperature at 5.0 mm² (0.013 mm thick) copper land areas.

Fig. 1 POWER TEMPERATURE DERATING CURVE

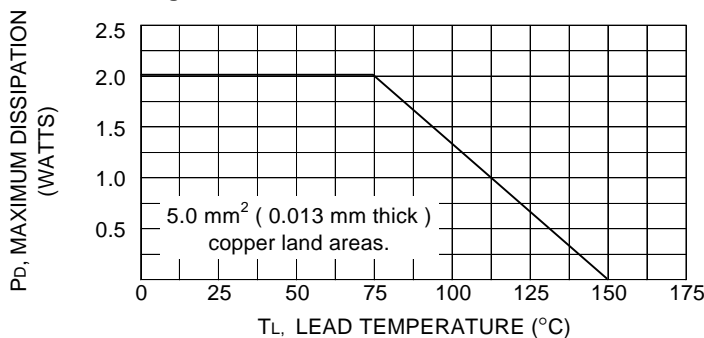

ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified

TYPE	Nominal Zener Voltage		Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current
	Vz @ IZT	IZT	ZzT @ IZT	ZzK @ IZK	IZK	IR @ VR		IZM
	(V)	(mA)	(Ω)	(Ω)	(mA)	(μA)	(V)	(mA)
SZ452H	2.7	80	10	400	1	100	1	660
SZ453A	3	160	8	400	1	100	1	600
SZ453D	3.3	145	8	400	1	80	1	545
SZ453G	3.6	139	5	400	1	80	1	504
SZ453J	3.9	128	5	400	1	50	1	468
SZ454D	4.3	116	4.5	400	1	50	1	434
SZ454H	4.7	106	4.5	550	1	50	1	386
SZ455B	5.1	98	3.5	600	1	50	1	356
SZ455G	5.6	89.5	2.5	500	1	50	2	324
SZ456C	6.2	80.5	1.5	700	1	50	3	292
SZ456I	6.8	73.5	2	700	1	50	4	266
SZ457F	7.5	66.5	2	700	0.5	50	5	242
SZ458C	8.2	61	2.3	700	0.5	50	6	220
SZ459B	9.1	55	2.5	700	0.5	50	7	200
SZ4510	10	50	3.5	700	0.25	50	7.6	182
SZ4511	11	45.5	4	700	0.25	50	8.4	166
SZ4512	12	41.5	4.5	700	0.25	1	9.1	152
SZ4513	13	38.5	5	700	0.25	0.5	9.9	138
SZ4514	14	35.7	5.5	700	0.25	0.5	10.6	130
SZ4515	15	33.4	7	700	0.25	0.5	11.4	122
SZ4516	16	31.2	8	700	0.25	0.5	12.2	114
SZ4517	17	29.4	9	750	0.25	0.5	13	107
SZ4518	18	27.8	10	750	0.25	0.5	13.7	100
SZ4519	19	26.3	11	750	0.25	0.5	14.4	95
SZ4520	20	25	11	750	0.25	0.5	15.2	90
SZ4522	22	22.8	12	750	0.25	0.5	16.7	82
SZ4524	24	20.8	13	750	0.25	0.5	18.2	76
SZ4527	27	18.5	18	750	0.25	0.5	20.6	68
SZ4530	30	16.6	20	1000	0.25	0.5	22.5	60
SZ4533	33	15.1	23	1000	0.25	0.5	25.1	55
SZ4536	36	13.9	25	1000	0.25	0.5	27.4	50
SZ4539	39	12.8	30	1000	0.25	0.5	29.7	47
SZ4543	43	11.6	35	1500	0.25	0.5	32.7	43
SZ4547	47	10.6	40	1500	0.25	0.5	35.8	39
SZ4551	51	9.8	48	1500	0.25	0.5	38.8	36
SZ4556	56	9	55	2000	0.25	0.5	42.6	32
SZ4562	62	8.1	60	2000	0.25	0.5	47.1	29
SZ4568	68	7.4	75	2000	0.25	0.5	51.7	27
SZ4575	75	6.7	90	2000	0.25	0.5	56	24
SZ4582	82	6.1	100	3000	0.25	0.5	62.2	22
SZ4591	91	5.5	125	3000	0.25	0.5	69.2	20
SZ45B0	100	5	175	3000	0.25	0.5	76	18
SZ45B1	110	4.5	250	4000	0.25	0.5	83.6	17
SZ45B2	120	4.2	325	4500	0.25	0.5	91.2	15
SZ45B3	130	3.8	400	5000	0.25	0.5	98.8	14
SZ45B4	140	3.6	500	5500	0.25	0.5	106.4	13
SZ45B5	150	3.3	575	6000	0.25	0.5	114	12
SZ45B6	160	3.1	650	6500	0.25	0.5	121.6	11
SZ45B7	170	2.9	675	7000	0.25	0.5	130.4	11
SZ45B8	180	2.8	725	7000	0.25	0.5	136.8	10
SZ45B9	190	2.6	825	8000	0.25	0.5	144.8	10
SZ45D0	200	2.5	900	8000	0.25	0.5	152	9

Notes :

- (1) The type number listed have a standard tolerance on the nominal zener voltage of ± 5.0%, altered the fourth number of type from " 5 " for ± 5.0% tolerance to be " 0 " for ± 10% tolerance.
- (2) " SZ " will be omitted in marking on the diode.

Rating and characteristic curves

FIG.1 Typical Thermal Response L

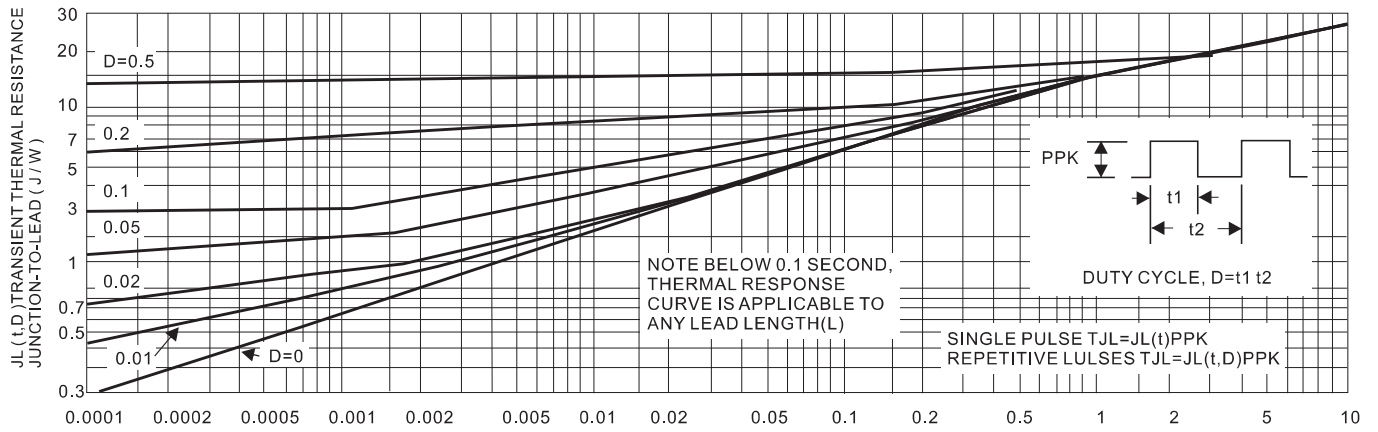


Fig. 2 Maximum Surge Power

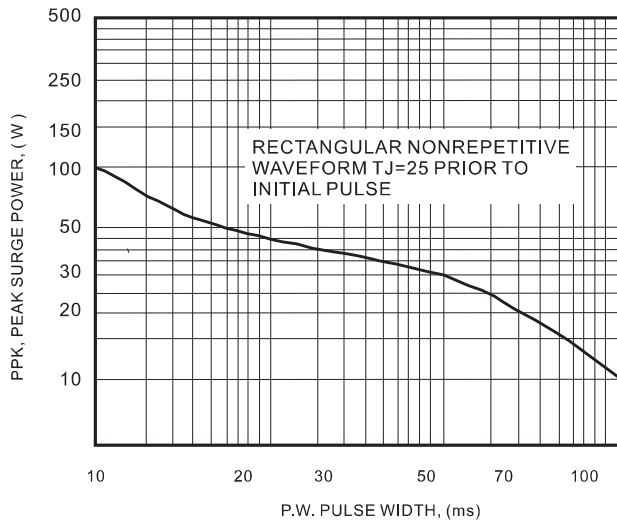


Fig. 3 Maximum Surge Power

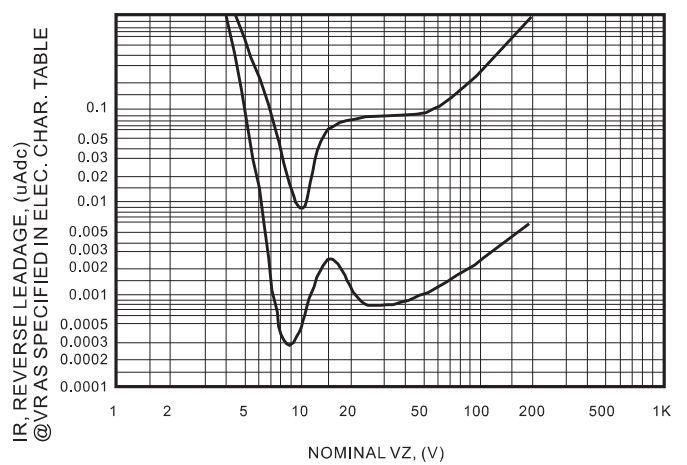


FIG.4 Units To 200 Volts


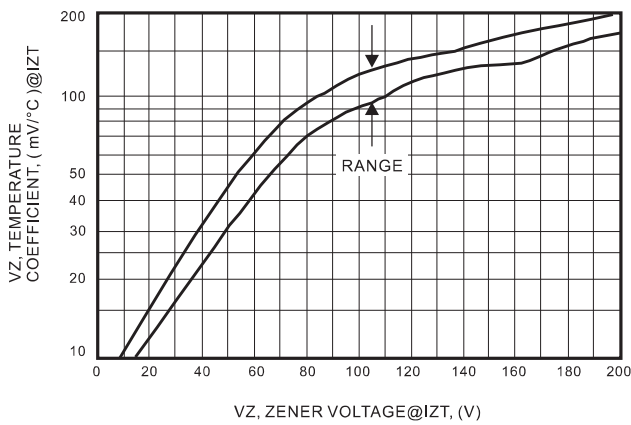


Fig 5. Units To 12 Volts

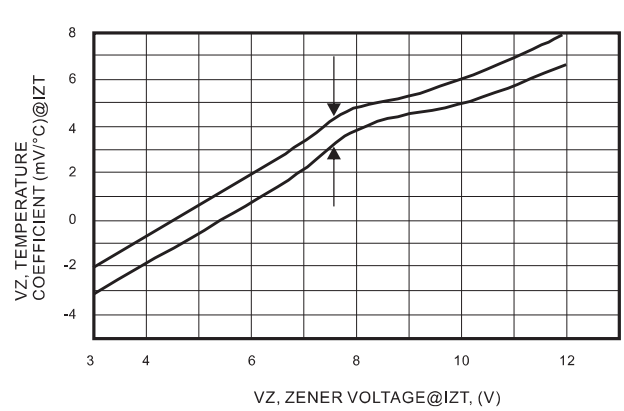

Rating and characteristic curves

FIG.6 VZ = 3.9 Thru 10 Volts

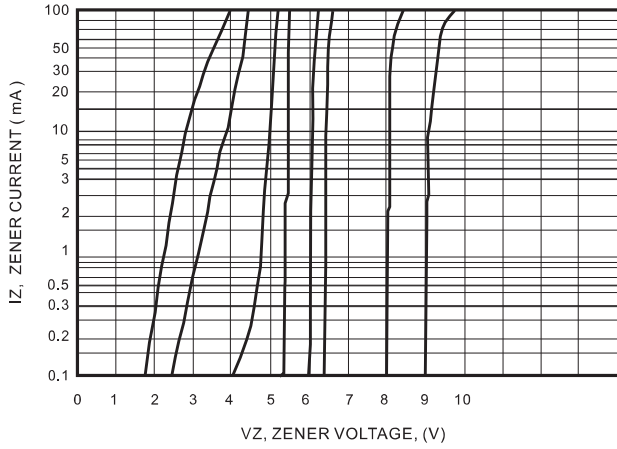


FIG.7 VZ = 12 Thru 82 Volts

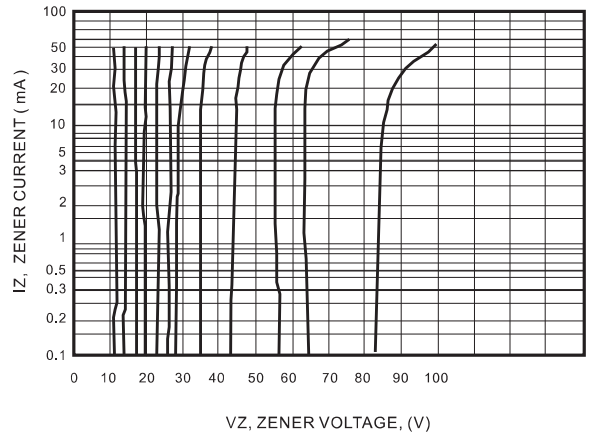


Fig. 8 VZ = 100 Thru 200 Volts



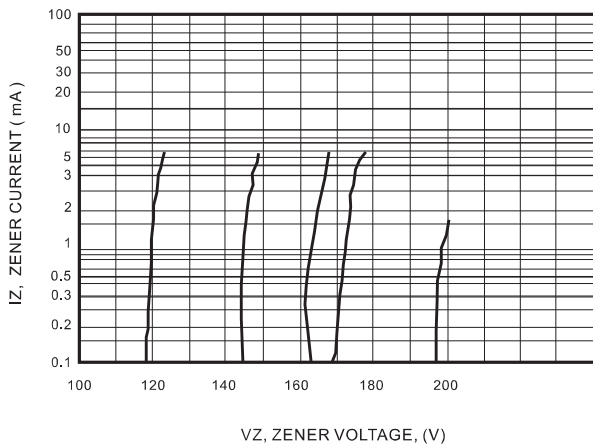


Fig. 9 Typical Thermal Resistance

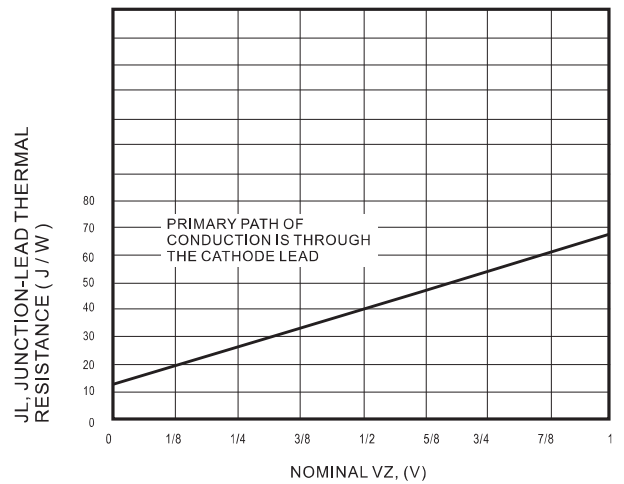

Package Outline

DO-214AC SMA

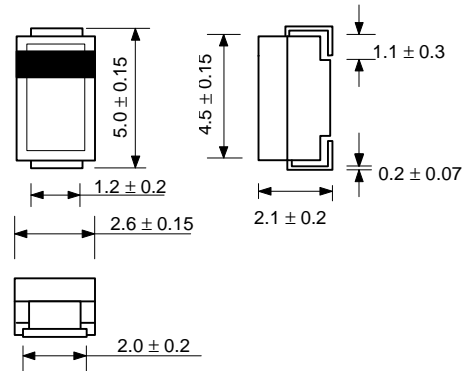

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
DO-214AC SMA	Tape/Reel, 11" reel	5000	EIA-481-1
	Tape/Reel, 7" reel	2000	EIA-481-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [1N4682](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#) [1N5369B](#) [1N747A](#)
[1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [JANS1N4974US](#) [JANTX1N5907](#) [1N4692](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4745ARL](#)
[1N4752ARL](#) [1N4760ARL](#) [1N5221B](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#) [3SMAJ5946B-TP](#)
[3SMAJ5950B-TP](#) [MMSZ5230BQ-13-F](#) [MMSZ5232BQ-13-F](#) [BZX84C7V5](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#)
[DZ2S240M0L](#) [SMAZ27-TP](#) [ZMM5224B-7](#) [RD16UM-T1-A](#) [RD10S-T1-A](#) [CDZT2R5.6B](#) [1N4762A G](#) [Z1SMA18](#) [JANTX1N4553B](#)