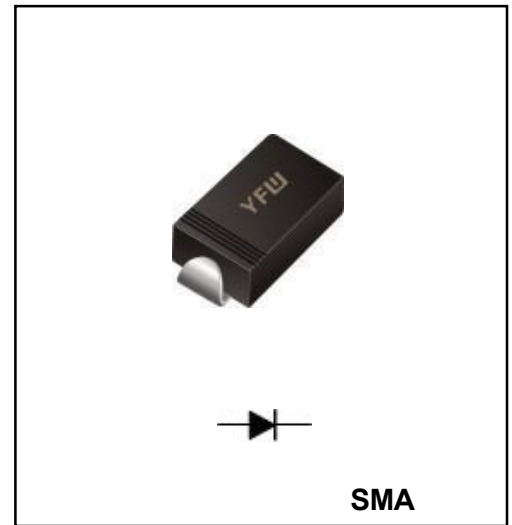


High voltage surface mount diodes
Reverse Voltage – 8kV
Forward Current –5mA
FEATURES

- ◆ High speed switching
- ◆ High Current
- ◆ High surge resisitivity for CRT discharge
- ◆ High reliability design
- ◆ High Voltage


Maximum Ratings and Characteristics

- ◆ Absolute Maximum Ratings
- ◆ Terminals: Pure tin plated leads, solderable per J-STD-002and JESD22-B102, E3 suffix for consumer grade, meet JESD201class 1A whisker test.
- ◆ Polarity: Color band denotes cathode end



Maximum rating (Ta=25°C unless otherwise noted)

Parameter		Symbol	YFW08	Unit
Repetitive peak reverse voltage		V_{RRM}	8	KV
Average forward current	60Hz half-sine wave, Resistance load, Ta=25°C	$I_{F(AV)}$	5	mA
Surge(Non-repetitive)forward current	60Hz half-sine wave,1cycle,Ta=25°C	I_{FSM}	10	A
Peak forward voltage	$I_{FM}=10mA$	V_{FM}	25	V
Peak reverse current $V_{RM}=V_{RRM}$	Ta=25°C	I_{RRM}	0.1	μA
	Ta=100°C		10	
Reverse recovery time	$I_F=2mA, I_{RM}=4mA$	T_{rr}	0.08	uS
Operating ambient temperature		T_a	-40 ~ +150	°C
Storage Temperature Range		T_{stg}	-40 ~ +150	°C
Virtual junction temperature		$T_{(vj)}$	150	°C

Forward Current Derating Curve

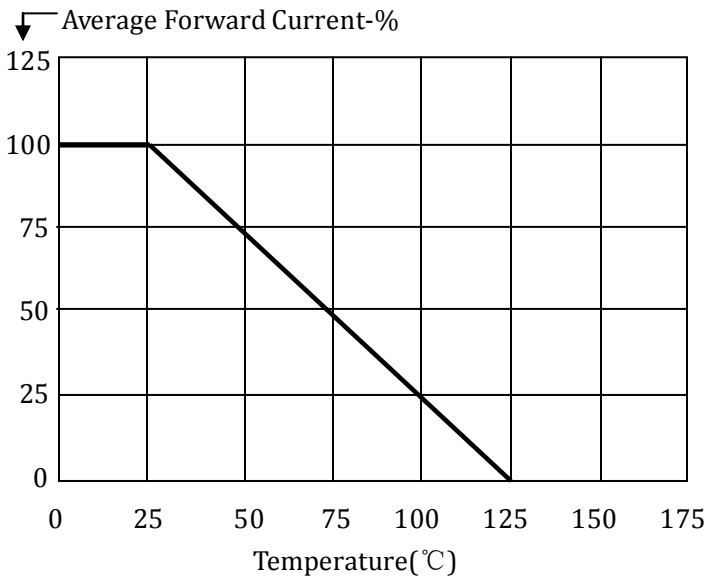


Reverse Recovery Measurement Waveform

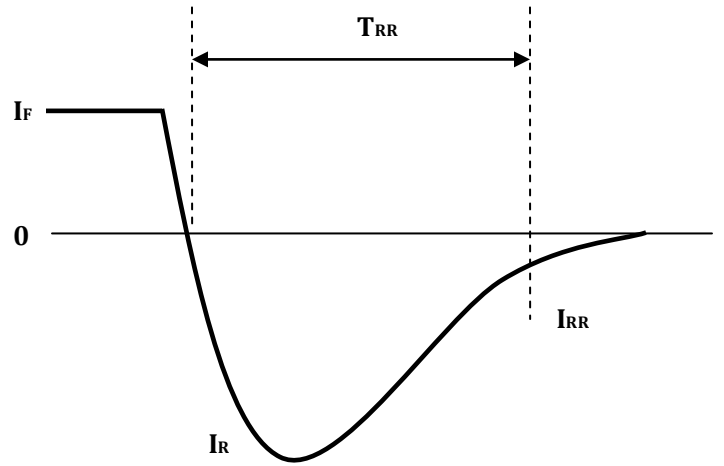


Typical data capture points: $I_F = 0.5I_R$, $I_R, I_{RR} = 0.25I_R$
 I_R is typically the rated average forward current maximum (I_{FAVM}) of the D.U.T

Non-Repetitive Surge Current

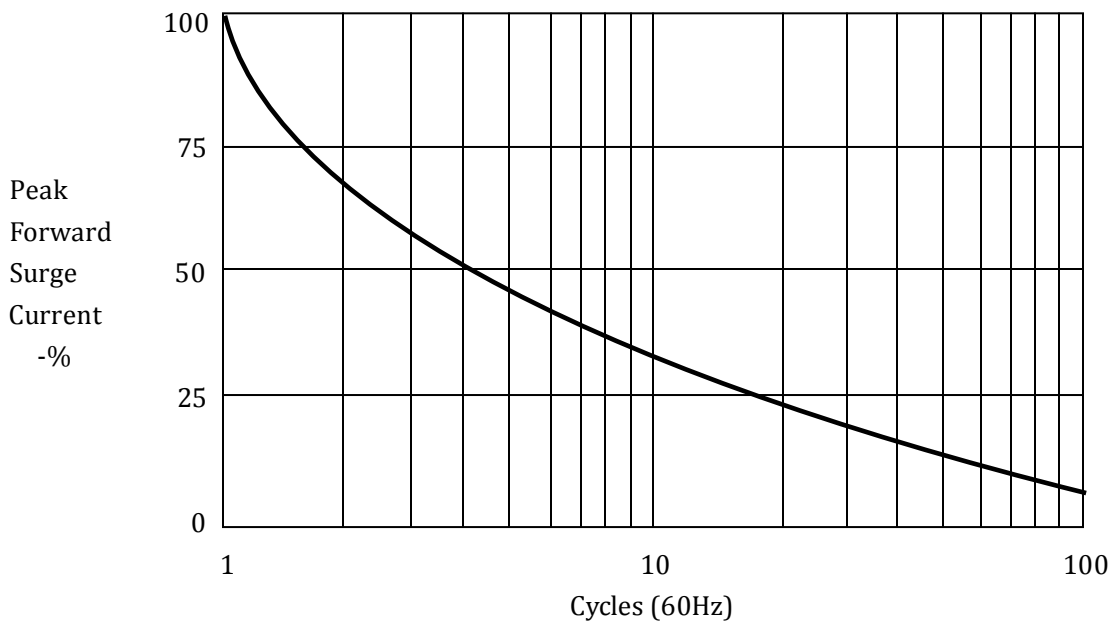

Package outline dimensions

Plastic surface mounted package; 2 leads

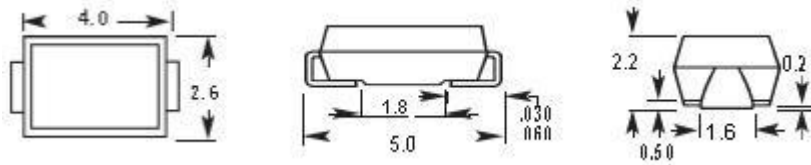

Outline Drawings : mm

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
SMA	BOX	5000	EIA-481-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [YFW Electronics manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)
[MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#)
[BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#)
[BAV99HDW-13](#) [1N4004](#) [MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [M0268SJ200NLF](#) [M0268RJ200NLF](#) [S3MBF](#) [US1J](#)
[DAN217U-TP](#) [SHV-06JNS-Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#) [M1MA152WAT1](#)