

**80V N-CHANNEL ENHANCEMENT MODE MOSFET**


**MAIN CHARACTERISTICS**

<b>I<sub>D</sub></b>	100A
<b>V<sub>DSS</sub></b>	80V
<b>R<sub>DS(on)-typ</sub>(@V<sub>GS</sub>=10V)</b>	< 6.5mΩ ( <b>Type:5.8 mΩ</b> )



**Applications**

Power switch circuit of adaptor and charger.

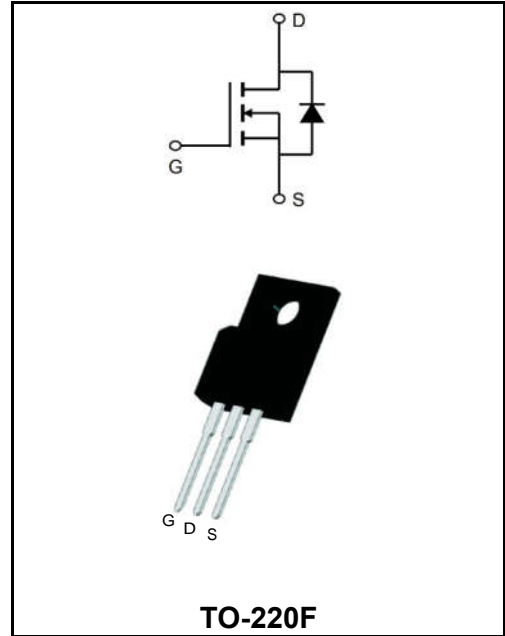

**Product Specification Classification**

Part Number	Package	Marking	Pack
YFW100N08AF	TO-220F	YFW 100N08AF XXXXX	1000PCS/Tape







**Maximum Ratings at Tc=25°C unless otherwise specified**

Characteristics	Symbols	Value	Units
Drain-Source Voltage	<b>V<sub>DS</sub></b>	80	<b>V</b>
Gate - Source Voltage	<b>V<sub>GS</sub></b>	±20	<b>V</b>
Continuous Drain Current	<b>I<sub>D</sub></b>	100	<b>A</b>
Pulsed Drain Current	<b>I<sub>DM</sub></b>	400	<b>A</b>
Single Pulse Avalanche Energy	<b>E<sub>AS</sub></b>	506	<b>mJ</b>
Power Dissipation	<b>P<sub>D</sub></b>	158	<b>W</b>
Storage Temperature Range	<b>T<sub>STG</sub></b>	-55 to +150	<b>°C</b>
Operating and Storage Temperature Range	<b>T<sub>J</sub></b>	150	<b>°C</b>
Thermal Resistance Junction-Ambient	<b>R<sub>θJA</sub></b>	92	<b>°C/W</b>
Thermal Resistance Junction-Case	<b>R<sub>θJC</sub></b>	0.73	<b>°C/W</b>






**Maximum Ratings at Tc=25°C unless otherwise specified**

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	$BV_{DSS}$	80	-	-	V
Static Drain-Source On-Resistance	$V_{GS}=10V, I_D=40A$	$R_{DS(ON)}$	-	5.8	6.5	mΩ
Gate -Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	$V_{GS(th)}$	2.0	-	4.0	V
Drain-Source Leakage Current	$V_{DS}=80V, V_{GS}=0V$	$I_{DSS}$	-	-	1	μA
	$V_{DS}=80V, V_{GS}=0V, T_J=55^\circ C$		-	-	100	
Gate- Source Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	$I_{GSS}$	-	-	±100	nA
Forward Transconductance	$V_{DS}=5V, I_D=40A$	$g_{fs}$	-	90	-	S
Total Gate Charge	$V_{DS}=40V$ $V_{GS}=10V$ $I_D=40A$	$Q_g$	-	46.6	-	nC
Gate-Source Charge		$Q_{gs}$	-	19.4	-	
Gate-Drain Charge		$Q_{gd}$	-	10.2	-	
Turn-on delay time	$V_{DD}=40V$ $V_{GS}=10V$ $R_G=2.7\Omega$	$t_{d(on)}$	-	15.2	-	nS
Rise Time		$T_r$	-	35	-	
Turn-Off Delay Time		$t_{d(OFF)}$	-	36.7	-	
Fall Time		$t_f$	-	18.1	-	
Input Capacitance	$V_{DS}=40V$ $V_{GS}=0V$ $f=1MHz$	$C_{iss}$	-	3400	-	pF
Output Capacitance		$C_{oss}$	-	770	-	
Reverse Transfer Capacitance		$C_{rss}$	-	25	-	
Continuous Source Current		$I_S$	-	-	100	A
Diode Forward Voltage	$I_{SD}=40A$	$V_{SD}$	-	-	1.3	V
Reverse Recovery Time	$I_F=40A, I_S = I_F$ $di/dt=100A/\mu s, T_J=25^\circ C$	$t_{rr}$	-	46.3	-	nS
Reverse Recovery Charge		$Q_{rr}$	-	59.1	-	nC

**Ratings and Characteristic Curves**

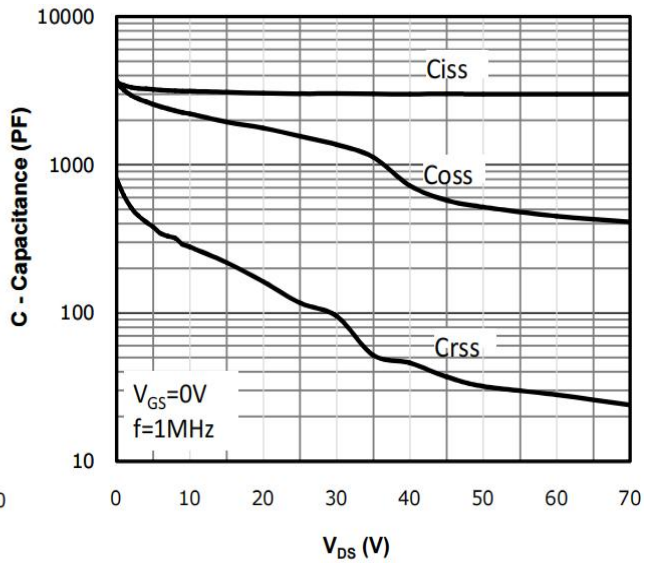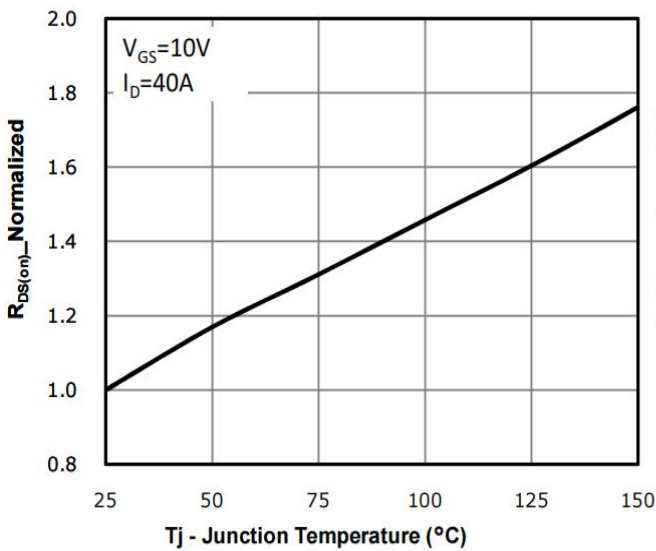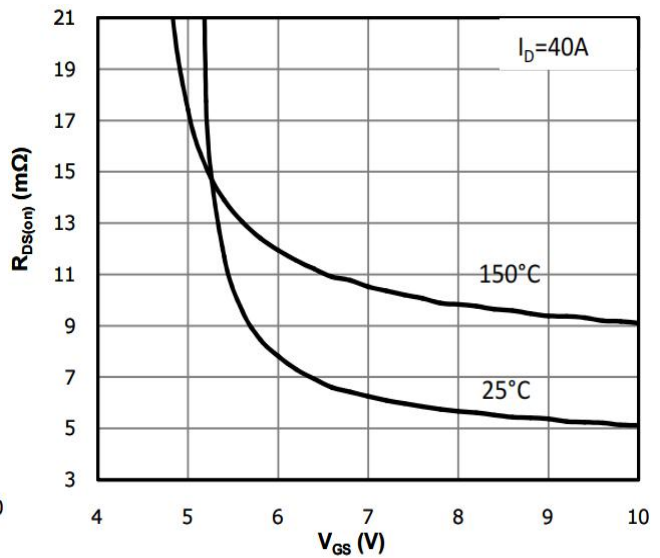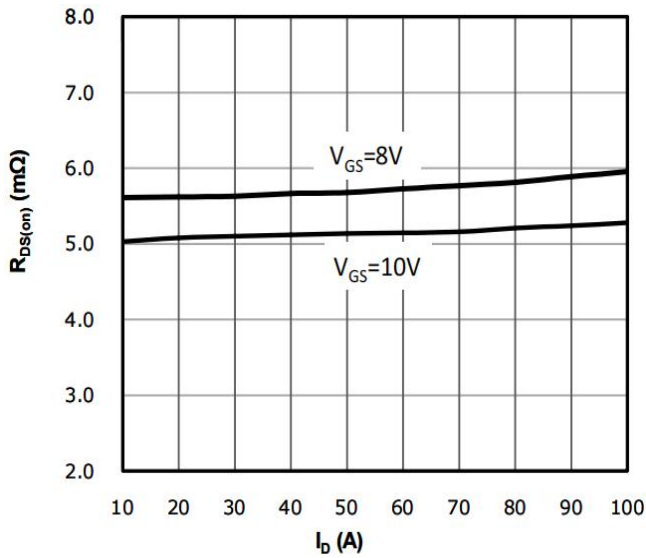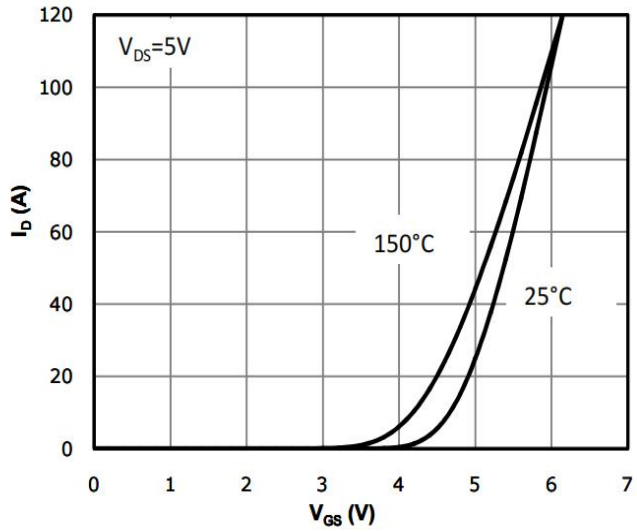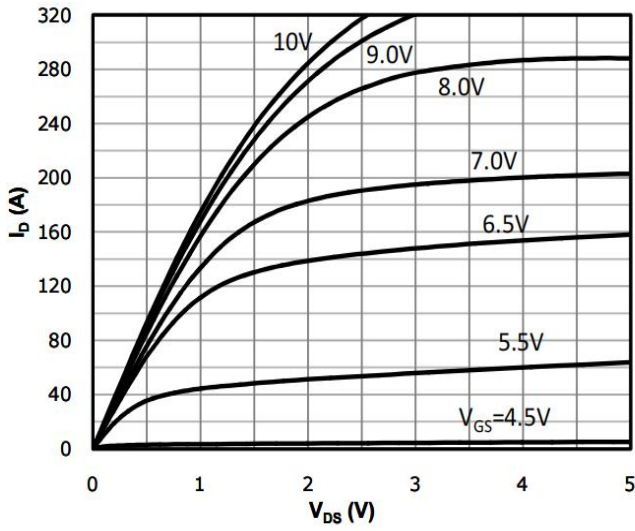


**Ratings and Characteristic Curves**

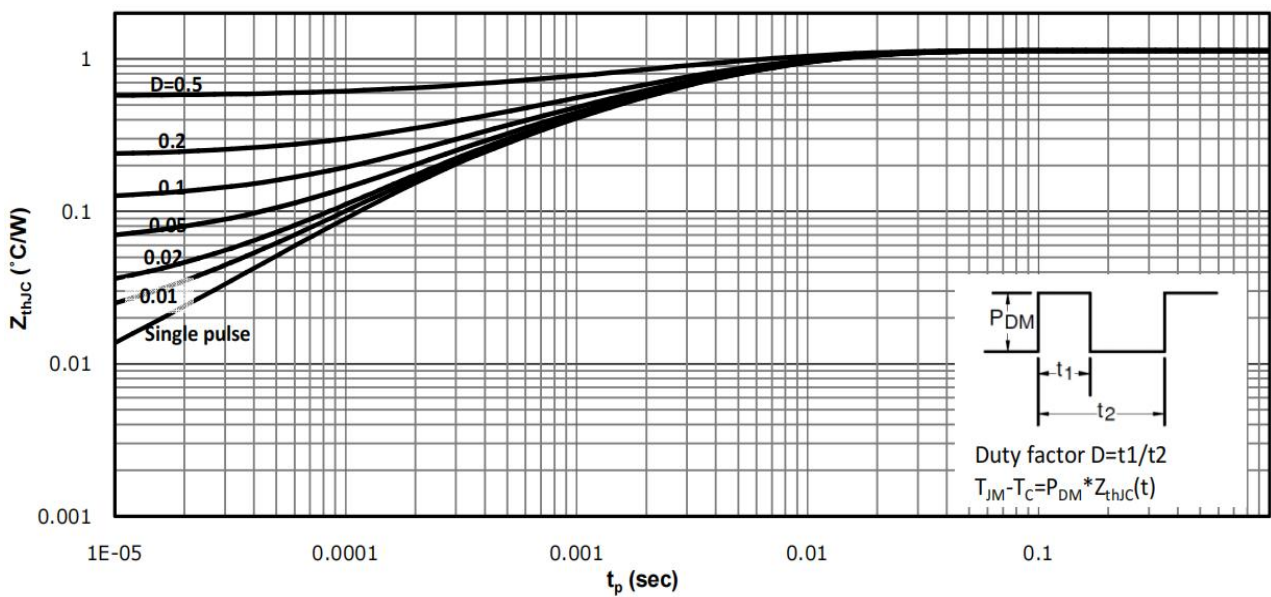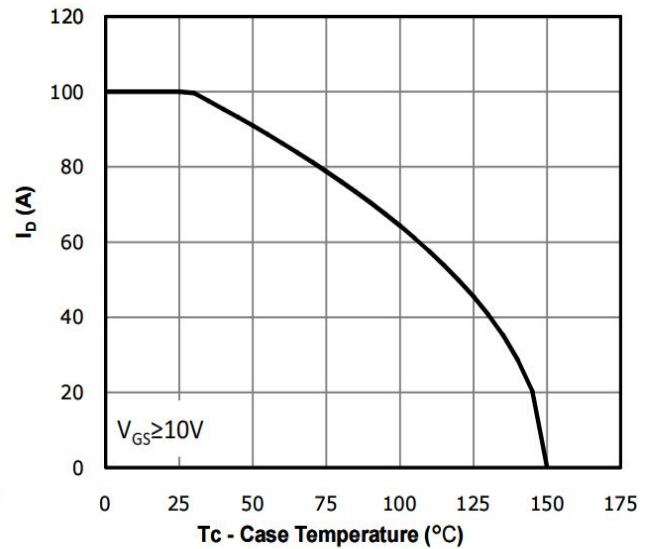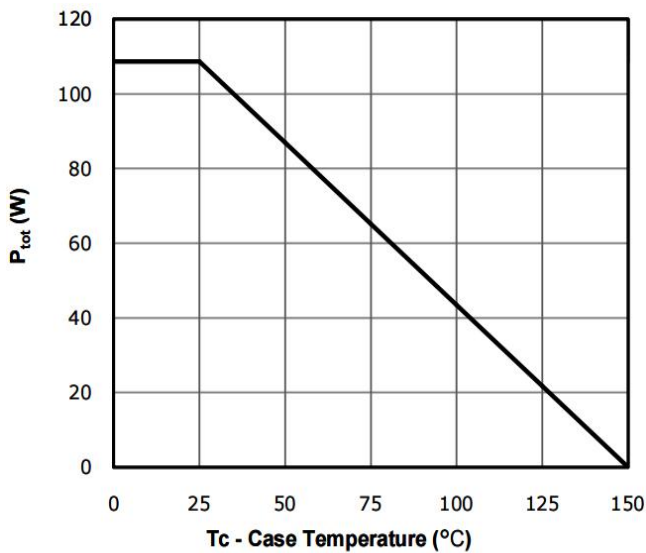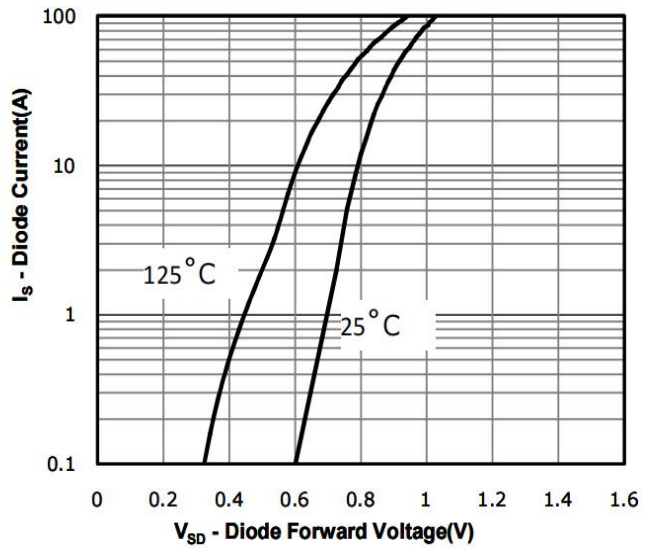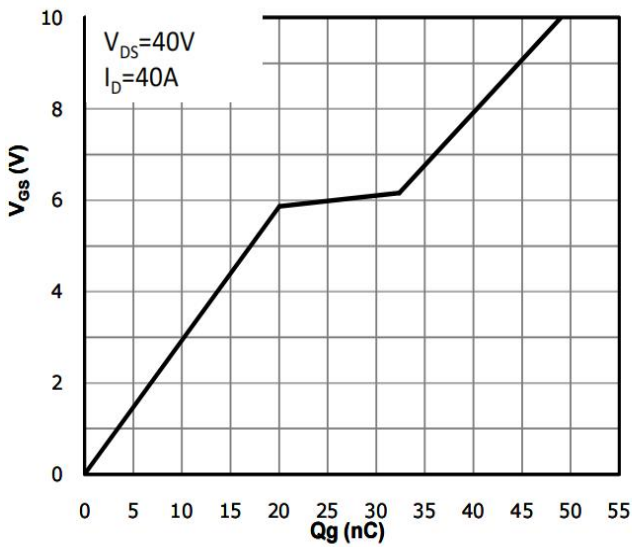

Package Outline Dimensions Millimeters

TO-220F

Dim.	Min.	Max.
A	9.95	10.25
B	2.95	3.25
C	1.25	1.45
D	12.95	13.25
E	0.50	0.65
F	3.1	3.3
G	1.30	1.45
H	Typ 2.54	
I	Typ 5.08	
J	4.60	4.75
K	2.50	2.65
L	6.35	6.55
M	15.4	16.0
N	2.75	3.05
O	0.48	0.52
P	0.76	0.84
All Dimensions in millimeter		

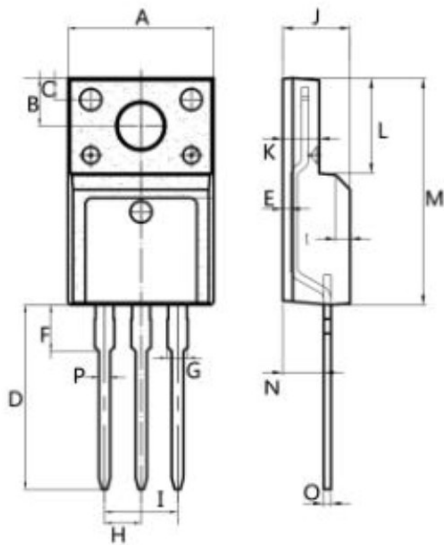

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [YFW Electronics](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)  
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)  
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)  
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)  
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)  
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1\\_T0\\_00201](#) [PJMF380N65E1\\_T0\\_00201](#)  
[PJMF280N60E1\\_T0\\_00201](#) [PJMF600N65E1\\_T0\\_00201](#) [PJMF900N65E1\\_T0\\_00201](#)