

N-Channel Enhancement Mode Power MOSFET

MAIN CHARACTERISTICS

I_D	10A
V_{DSS}	700V
R_{DS(on)-typ}(@V_{GS}=10V)	<1.1Ω(Type:0.87Ω)



Features

- Fast Switching
- Low ON Resistance
- Low Gate Charge
- 100% Single Pulse avalanche energy Test

APPLICATIONS


- Power switch circuit of adaptor and charger.

Mechanical Data

- Case: Molded plastic
- Mounting Position: Any
- Molded Plastic: UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275°C maximum,10s per JESD 22-B106

Product Specification Classification

Part Number	Package	Marking	Pack
YFW10N70AF	TO-220F	YFW 10N70AF XXXXX	1000PCS/box
YFW10N70AT	TO-220AB	YFW 10N70AT XXXXX	1000PCS/box
YFW10N70AS	TO-263	YFW 10N70AS XXXXX	1000PCS/box
YFW10N70AS-R	TO-263	YFW 10N70AS XXXXX	800PCS/Tape

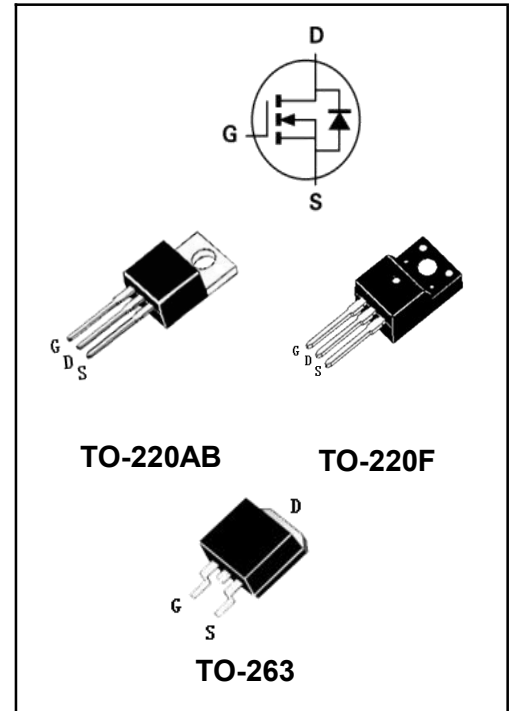

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbol	Value		Unit
		220F	220AB/263	
Drain-Source Voltage	V_{DS}	700		V
Gate-Source Voltage	V_{GS}	±30		V
Continue Drain Current	I_D	10		A
Pulsed Drain Current (Note1)	I_{DM}	40		A
Power Dissipation	P_D	30	110	W
Single Pulse Avalanche Energy (Note1)	E_{AS}	500		mJ
Operating Temperature Range	T_J	150		°C
Storage Temperature Range	T_{STG}	-55 to +150		°C
Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.2	1.1	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	100	°C/W

Note1:Pulse test: 300 μs pulse width, 2 % duty cycle

Electrical Characteristics at Tc=25°C unless otherwise specified







Characteristics	Test Condition	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0 V, I_D = 250 \mu A$	BV_{DSS}	700	720	-	V
Drain-Source Leakage Current	$V_{DS} = 700 V, V_{GS} = 0 V$	I_{DSS}	-	-	1	μA
Gate Leakage Current	$V_{GS} = \pm 30 V, V_{DS} = 0 V$	I_{GSS}	-	-	±100	nA
Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu A$	$V_{GS(th)}$	2	-	4	V
Drain-Source On-State Resistance	$V_{GS} = 10 V, I_D = 5 A$	$R_{DS(on)}$	-	0.87	1.1	Ω
Forward Transconductance	$V_{DS} = 15 V, I_D = 5 A$	gfs	-	9.5	-	S
Input Capacitance	$V_{GS} = 0 V, V_{DS} = 2 V,$ $f = 200 KHz$	C_{iss}	-	1900	-	pF
Output Capacitance		C_{oss}	-	134	-	pF
Reverse Transfer Capacitance		C_{rss}	-	6	-	pF
Turn-on Delay Time(Note2)	$I_D = 10 A, V_{DD} = 350 V,$ $R_G = 10 \Omega$	$t_{d(ON)}$	-	25	-	ns
Rise Time(Note2)		t_r	-	21	-	ns
Turn-Off Delay Time(Note2)		$t_{d(OFF)}$	-	50	-	ns
Fall Time(Note2)		t_f	-	23	-	ns
Total Gate Charge(Note2)	$I_D = 10 A, V_{DD} = 560 V,$ $V_{GS} = 10 V$	Q_G	-	21.5	-	nC
Gate to Source Charge(Note2)		Q_{GS}	-	8	-	nC
Gate to Drain Charge(Note2)		Q_{GD}	-	12	-	nC

Source-Drain Diode Characteristics at Ta=25°C unless otherwise specified

Characteristics	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Maximun Body-Diode Continuous Current		I_S	-	-	10	A
Maximun Body-Diode Pulsed Current(Note2)		I_{SM}	-	-	40	A
Drain-Source Diode Forward Voltage	$I_{SD} = 10 A$	V_{SD}	-	-	1.4	V
Reverse Recovery Time(Note2)	$I_{SD} = 10 A, V_{GS} = 0 V,$ $di_F / dt = 100 A/\mu s$	trr	-	498	-	ns
Reverse Recovery Charge(Note2)		Qrr	-	3.1	-	μC


Note2:Pulse test: 300 μs pulse width, 2 % duty cycle

Ratings And Characteristic Curves

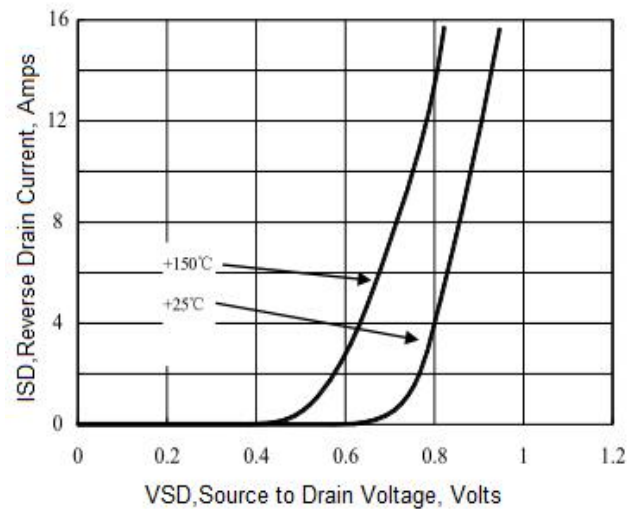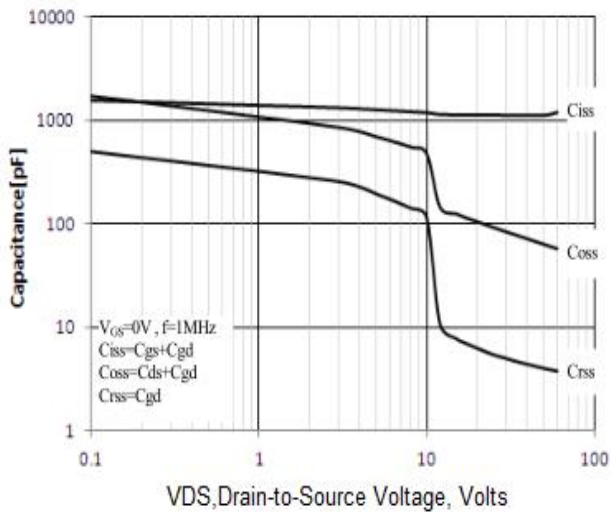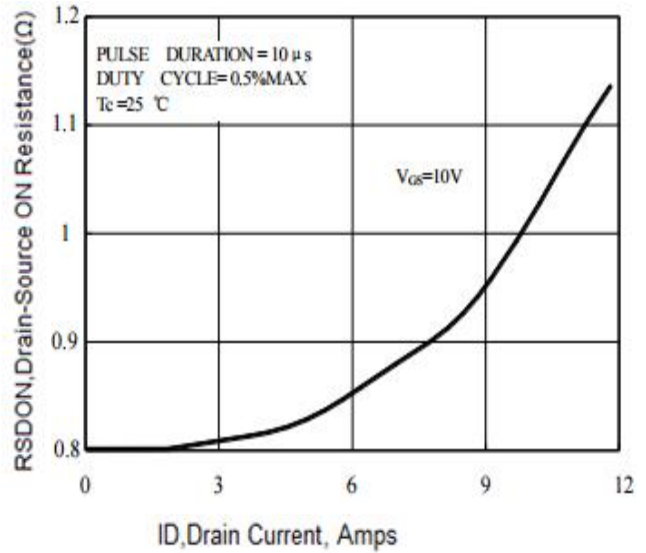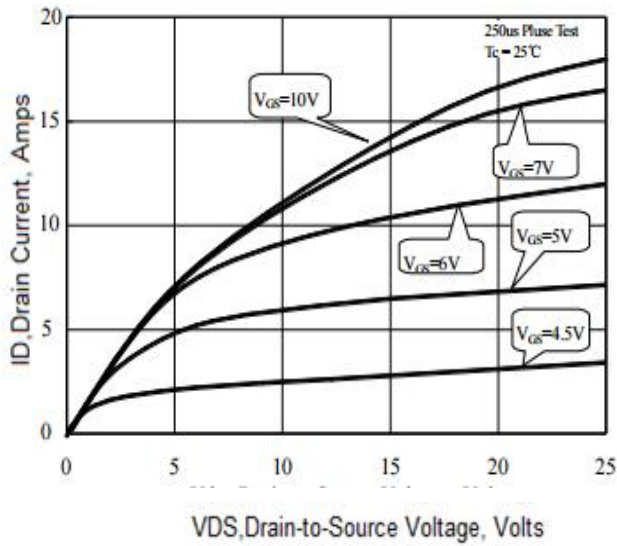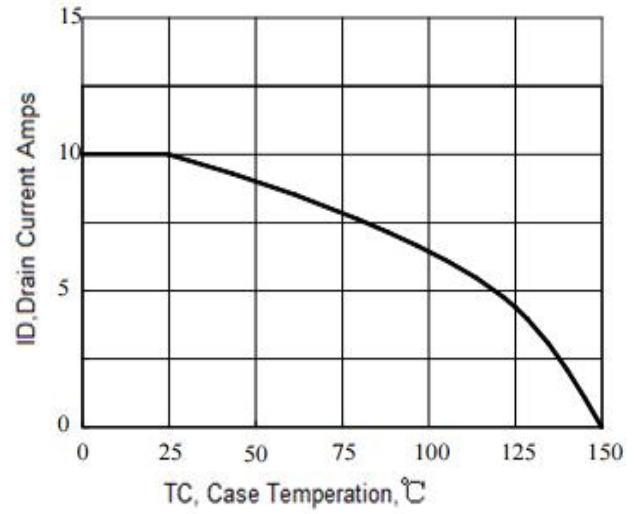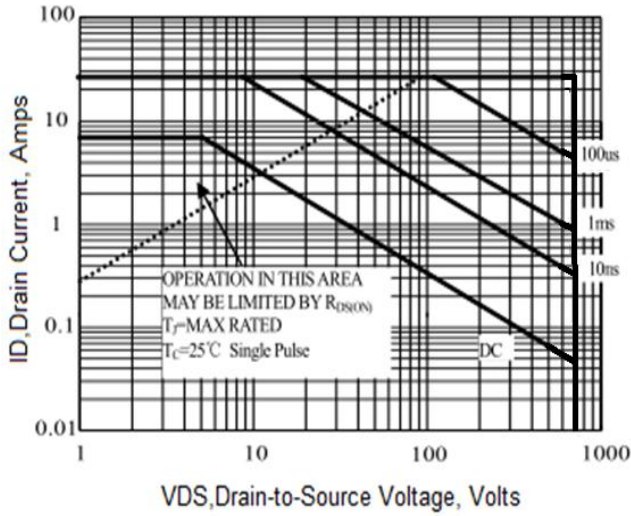


Package Outline Dimensions millimeters

TO-220F

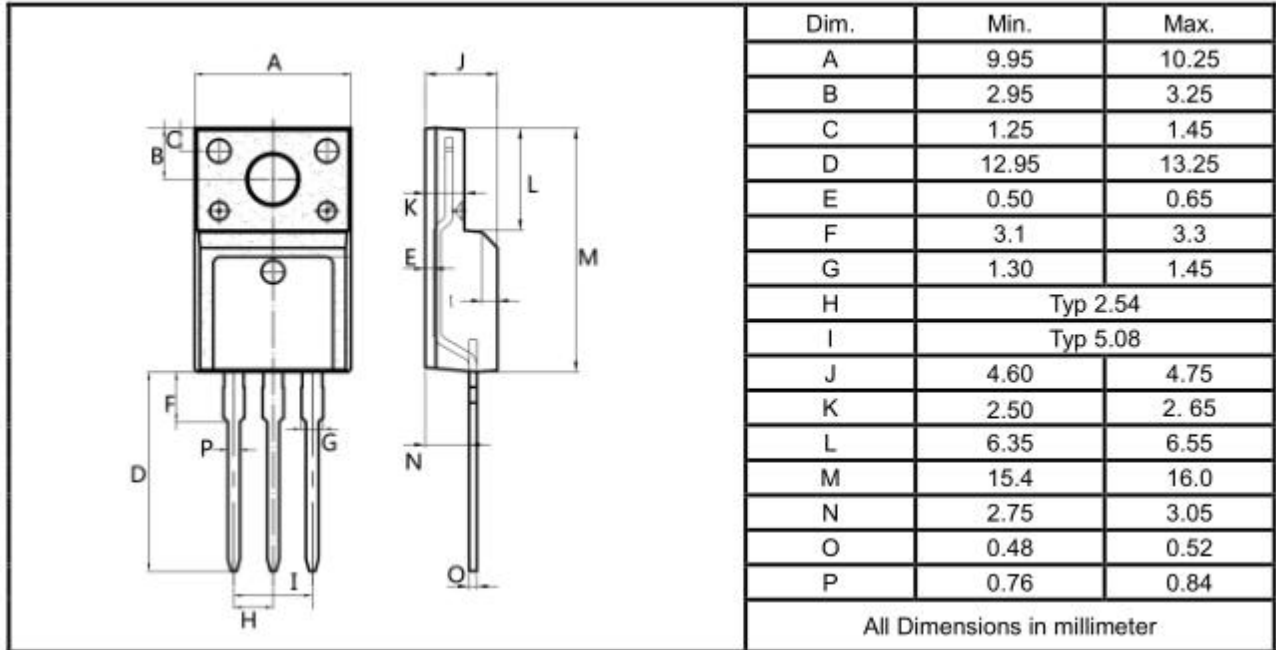


TO-220AB

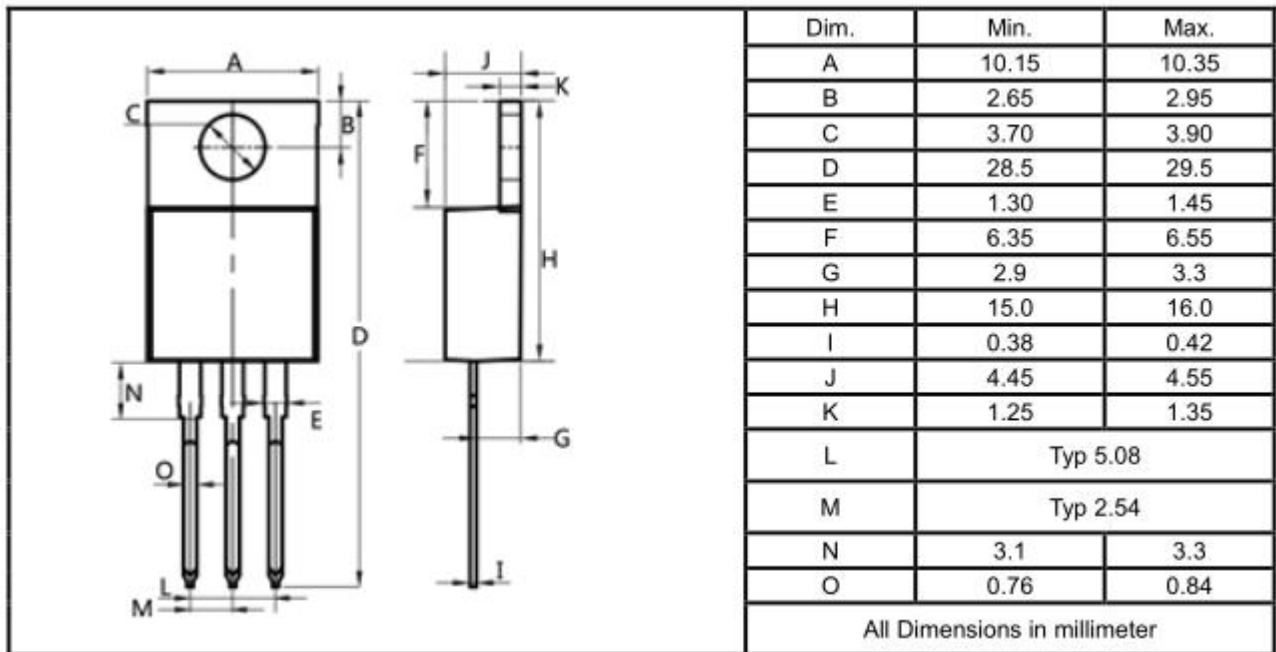

Package Outline Dimensions millimeters

TO-263

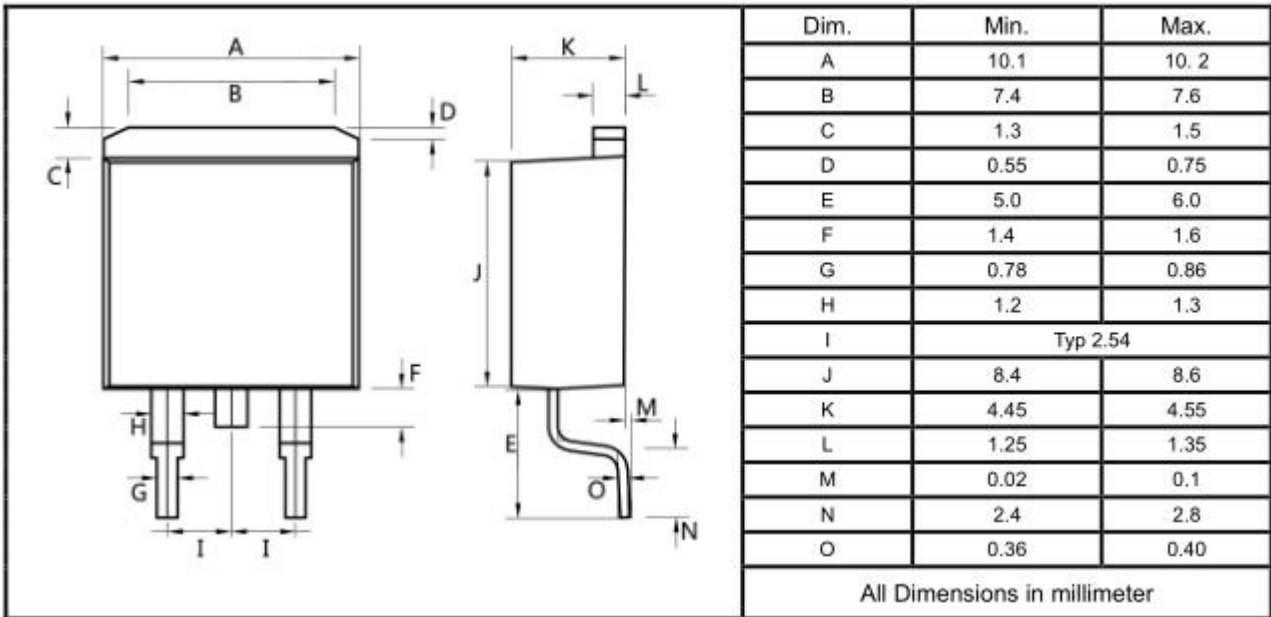

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)