

100V N-CHANNEL ENHANCEMENT MODE MOSFET


MAIN CHARACTERISTICS

I_D	120A
V_{DSS}	100V
$R_{DS(on)-typ}(@V_{GS}=10V)$	< 6mΩ (Type: 4.6 mΩ)



Application

- ◆ Battery protection
- ◆ Load switch
- ◆ Uninterruptible power supply

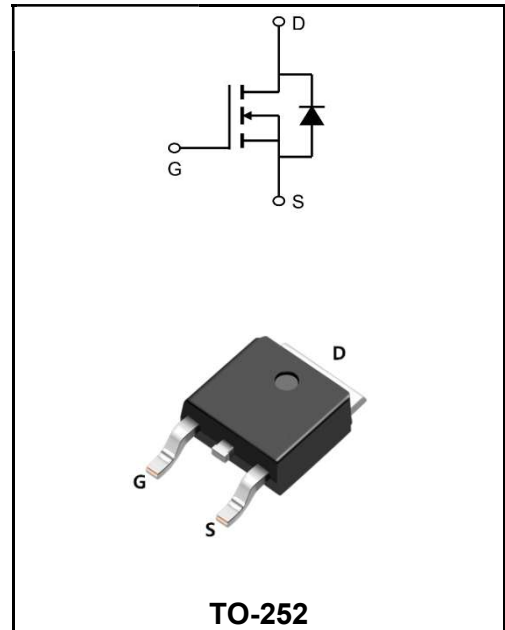

Product Specification Classification

Part Number	Package	Marking	Pack
YFW120N10AD	TO-252	YFW 120N10AD XXXXX	2500PCS/Tape

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbols	Value	Units
Drain-Source Voltage	V_{DS}	100	V
Gate - Source Voltage	V_{GS}	±20	V
Continue Drain Current	I_D	120	A
Pulsed Drain Current(Note1)	I_{DM}	300	A
Power Dissipation	P_D	148	W
Single Pulse Avalanche Energy (Note1)	E_{AS}	130	mJ
Operating Temperature Range	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Thermal Resistance, Junction to case	$R_{\theta JC}$	0.84	°C/W
Thermal Resistance, Junction to ambient	$R_{\theta JA}$	62	°C/W







Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	BV_{DSS}	100	-	-	V
Drain-Source Leakage Current	$V_{DS}=100V, V_{GS}=0V$	I_{DSS}	-	-	1	μA
Gate Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	I_{GSS}	-	-	± 100	nA
Gate-Source Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	$V_{GS(th)}$	1	-	3	V
Drain-Source on- State Resistance note3	$V_{GS}=10V, I_D=1A$	$R_{DS(ON)}$	-	4.6	6	m Ω
	$V_{GS}=4.5V, I_D=1A$		-	6.3	9	
Input Capacitance	$V_{DS}=50V$ $V_{GS}=0V$ $f=1MHz$	C_{iss}	-	3530	-	μF
Output Capacitance		C_{oss}	-	560.1	-	
Reverse Transfer Capacitance		C_{rss}	-	9	-	
Turn-on delay time(Note2)	$V_{DS}=50V$ $I_D=10A$ $R_G=2\Omega$ $V_{GS}=10V$	$t_{d(on)}$	-	22.5	-	ns
Rise Time(Note2)		T_r	-	8.6	-	
Turn-Off Delay Time		$t_{d(OFF)}$	-	66.6	-	
Fall Time(Note2)		t_f	-	42.1	-	
Total Gate Charge(Note2)	$V_{DS}=50V$ $V_{GS}=10V$ $I_D=10A$	Q_g	-	65.7	-	nC
Gate-to Source Charge(Note2)		Q_{gs}	-	8.4	-	
Gate to Drain Charge(Note2)		Q_{gd}	-	12.2	-	
Maximun Body-Diode Continuous Current		I_S	-	-	120	A
Drain-Source Diode Forward Voltage	$V_{GS}=0V, I_S=30A, T_J=25^\circ C$	V_{SD}	-	-	1.3	V
Reverse Recovery Time(Note2)	$T_J = 25^\circ C, I_S=10A$ $di / dt = 1000 A/\mu s$	t_{rr}	-	67	-	ns
Reverse Recovery Charge(Note2)		Q_{rr}	-	160	-	nC
Peak reverse recovery current		I_{rrm}	-	3.9	-	A





Note1:Pulse test: 300 μs pulse width, 2 % duty cycle

Note2:Pulse test: 300 μs pulse width, 2 % duty cycle

Ratings and Characteristic Curves

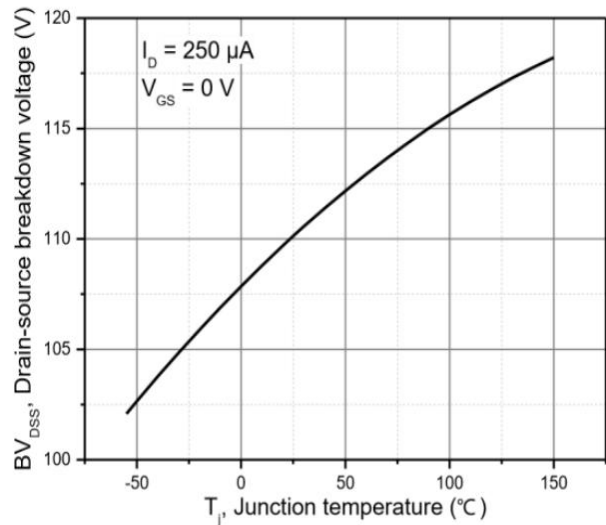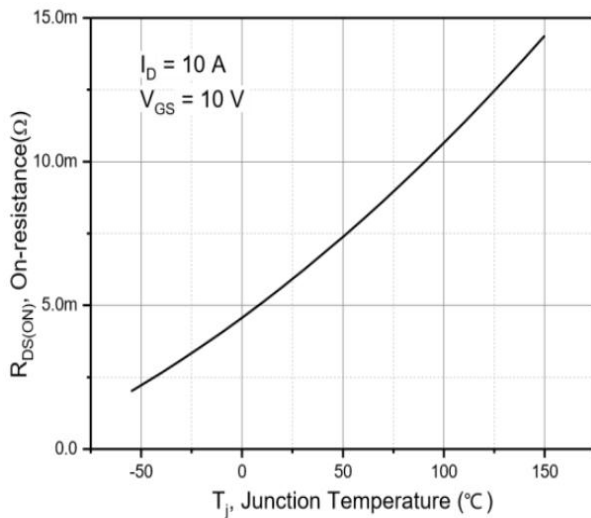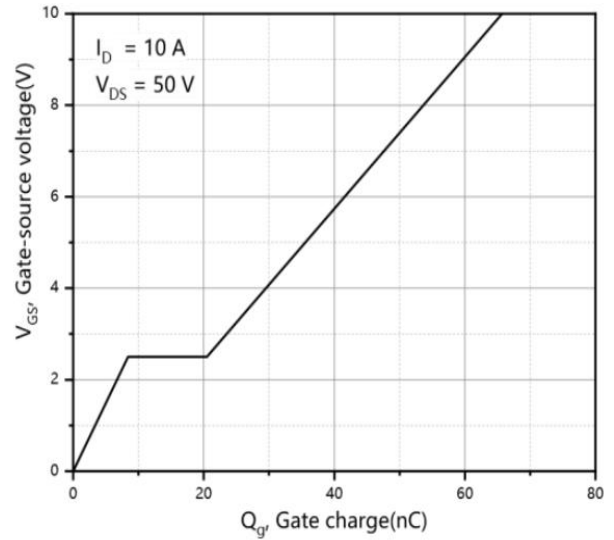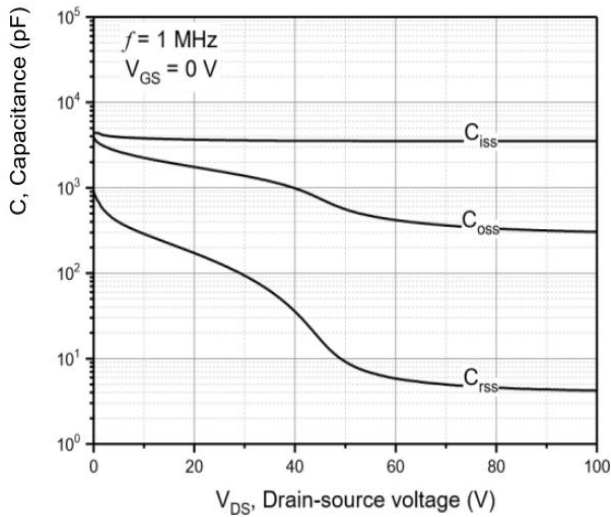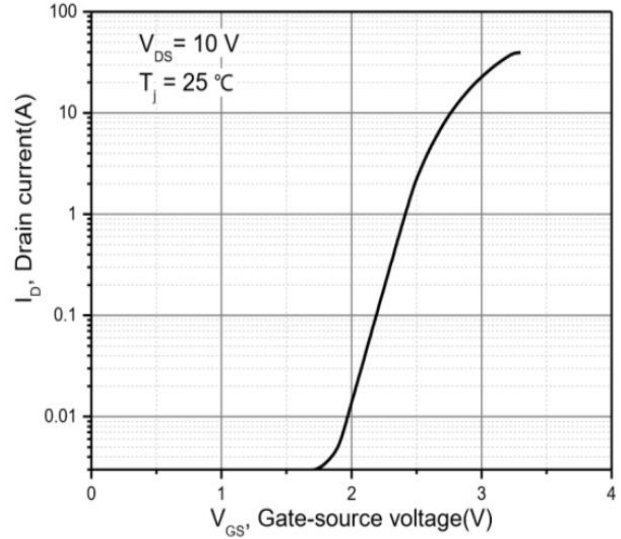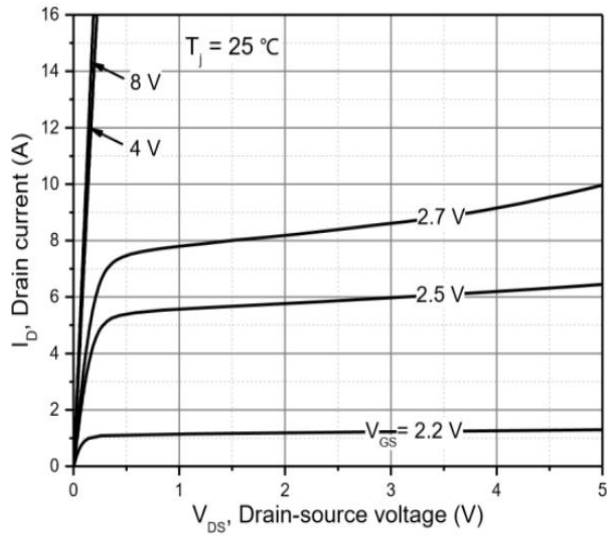

Ratings and Characteristic Curves

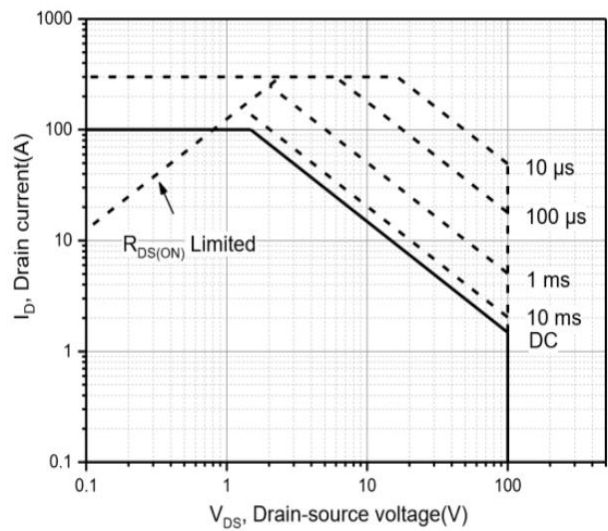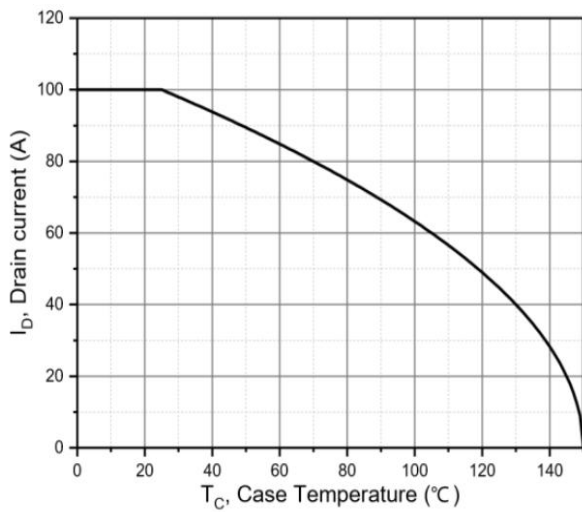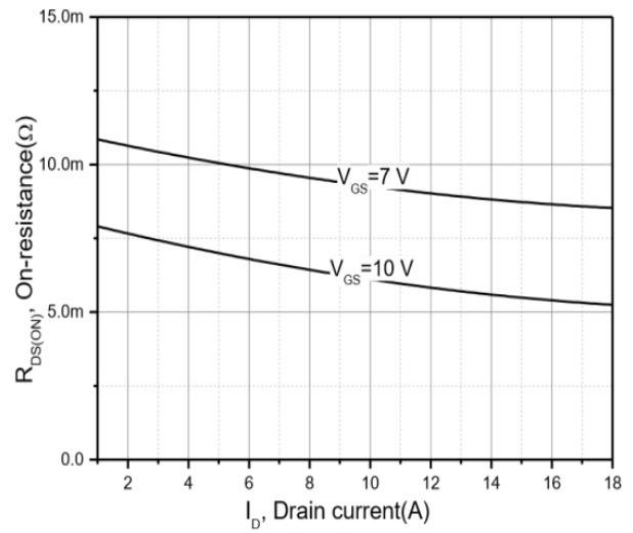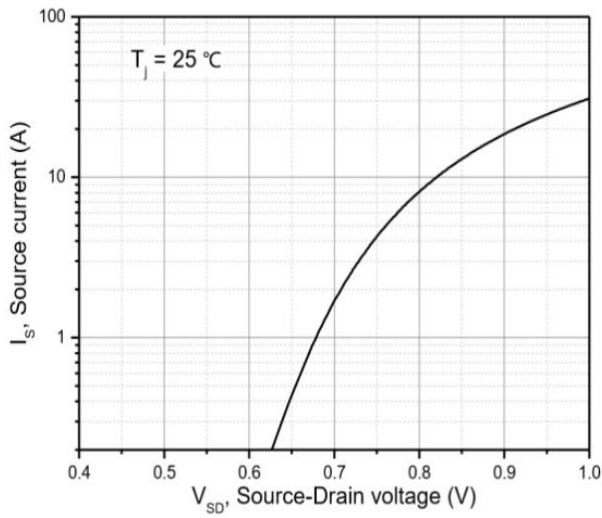

Package Outline Dimensions Millimeters

TO-252

	Dim.	Min.	Typ.	Max.
	A	2.10	-	2.50
	A2	0	-	0.10
	B	0.66	-	0.86
	B2	5.18	-	5.48
	C	0.40	-	0.60
	C2	0.44	-	0.58
	D	5.90	-	6.30
	D1	5.30REF		
	E	6.40	-	6.80
	E1	4.63	-	-
	G	4.47	-	4.67
	H	9.50	-	10.70
	L	1.09	-	1.21
	L2	1.35	-	1.65
V1	-	7°	-	
V2	0°	-	6°	
All Dimensions in millimeter				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#)
[WMJ80N60C4](#) [BXP2N20L](#) [BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTGR](#) [DMNH15H110SK3-13](#)
[SLF10N65ABV2](#) [BSO203SP](#) [BSO211P](#) [IPA60R230P6](#)